

# 2558A

AC Voltage Current Standard

**SIMPLE STANDALONE SOLUTION  
FOR CALIBRATING METERS, CLAMPS AND CTs**



Easy Operation

**A dial**  
for each function

High Accuracy

**0.04%** AC Voltage  
**0.05%** AC Current

Wide Output Range

**1.00 mV**  
to **1200.0 V**  
**1.00 mA**  
to **60.00 A**

For more information, go to  
[tmi.yokogawa.com](http://tmi.yokogawa.com)  
Test & Measurement Instruments



1-Year Warranty 

# Reliable and Simple Operation

The wide output ranges of 1.00 mV to 1200.0 V\* AC and 1.00 mA to 60.00 A\* AC mean that the 2558A is the instrument of choice for the cost effective calibration of AC analog meters. Rotary controls and a range of computer interfaces enable the 2558A to be intuitively operated through the front panel or controlled by an ATE system.

\* With the deviation function, the maximum output is 1440 V and 72 A.

Frequency / Phase



Frequency range selection

## Intuitive operation

Dials and switches are provided for each digit and function, and traditional 7-segment LEDs provide clear visibility.

## Sweep (Voltage/Current/Frequency\*1)

With a flick of a switch, the output can be swept from 0% to 120% of the main set value with sweep times of 8\*2, 16, 32 or 64 seconds.

\*1 The range of frequency sweep can be set.

\*2 Firmware version 1.04 or later.

## Output Divider

Linearity tests can be simply performed by dividing the output into steps. For example, a setting of 4 will generate steps of 25, 50, 75 and 100% of the set output value.

## Direct readout of the deviation

When the deviation dials are adjusted to check the full scale value on the meter, the deviation from the main output setting is displayed as a % of full scale.

## Digital display of output

The actual output value is displayed. It is therefore unnecessary to calculate the output value from the main, divider and deviation settings.

You can confirm that the output is stable and how it corresponds to the target meter's reading.

## Common current output terminals

The same output terminals are used for all current ranges. Test times are therefore reduced by avoiding the need to change the wiring for meters which have different ranges.

## High accuracy

**AC voltage : ±0.04 %**  
**AC current : ±0.05 %**

More than sufficient to calibrate meters with class 0.1% accuracy.

| 10 to 120 % of range |                               |                 |                 |
|----------------------|-------------------------------|-----------------|-----------------|
|                      | ± (% of setting + % of range) |                 |                 |
|                      | 50/60 Hz                      | 40 ≤ f ≤ 400 Hz | 400 < f ≤ 1 kHz |
| AC voltage           | 0.03 + 0.01*                  | 0.05 + 0.01     | 0.10 + 0.02     |
| AC current           | 0.04 + 0.01*                  | 0.06 + 0.01     | 0.12 + 0.02     |

\* Add 0.1% of range when output is 120% to 144% of range

| 1 to 10 % of range |                |                 |                 |
|--------------------|----------------|-----------------|-----------------|
|                    | ± (% of range) |                 |                 |
|                    | 50/60 Hz       | 40 ≤ f ≤ 400 Hz | 400 < f ≤ 1 kHz |
| AC voltage         | 0.013          | 0.015           | 0.03            |
| AC current         | 0.014          | 0.016           | 0.032           |


## High stability

**AC voltage/current : ±50 ppm/h**

± (20 ppm of range + 30 ppm of range)/h

Perform measurements with high repeatability over time

# New AC Voltage Current Standard from “YOKOGAWA”

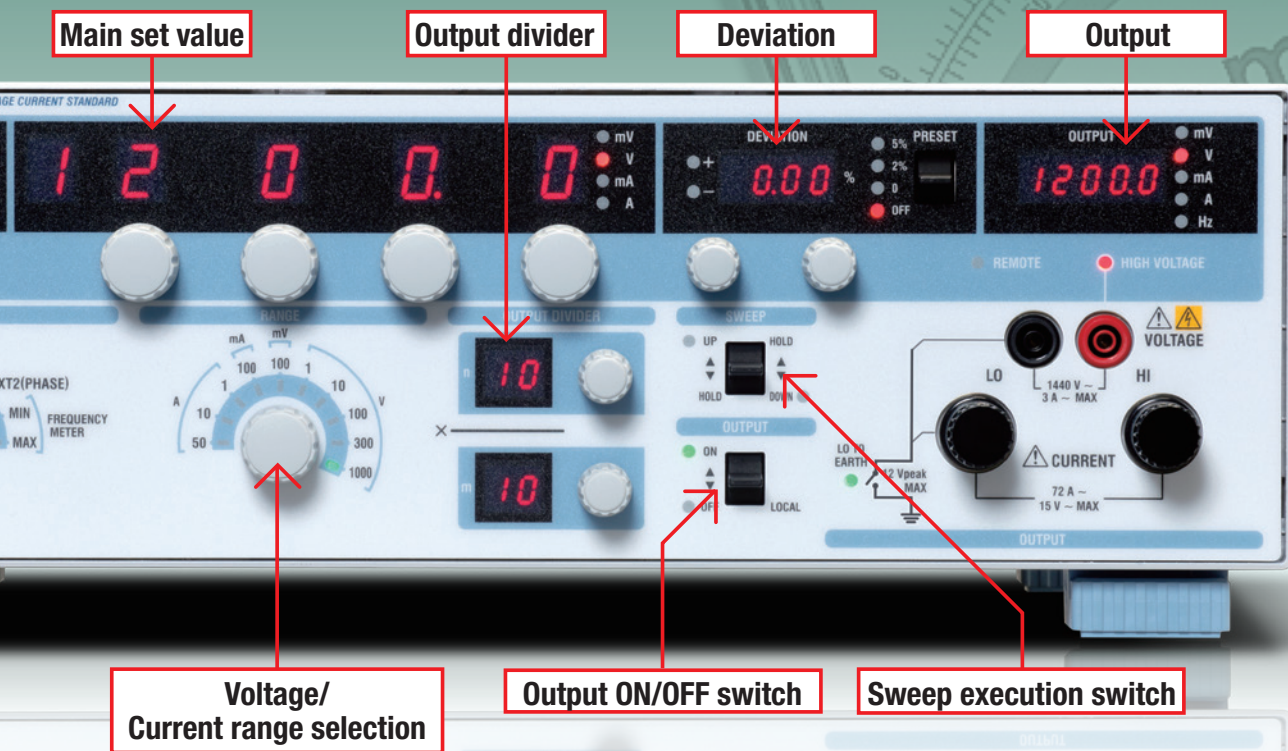

## Wide output range

**AC voltage : 1.00 mV to 1200.0 V**  
**AC current : 1.00 mA to 60.00 A**

**6 voltage ranges (100 m/1/10/100/300/1000 [V])**  
**4 current ranges (100 m/1/10/50 [A])**

The generation range is 0 to 144 % of range

### Ex. Set for the output

1. Select the range
2. Main setting : Available for 0 to 120 % of the range
3. Output divider : n & m (n/m of main set value)  
 m = The number of required calibration points  
 if the main set value = 100V, m = 5 and n = 1, the output will be 20 V
4. Deviation : Available for ± 20 % of the main setting

### Max. output current is “72A” at the 50 A range

Main setting : 60 A  
 Output divider : n = m  
 Deviation : - 20%

## Wide frequency range

**40 to 1000 Hz**  
**(Frequency accuracy : ±50 ppm)**

The 2558A provides fixed frequencies of 50/60 Hz (commercial) and 400 Hz (marine and aviation), as well as variable frequencies from 40 to 1000 Hz.

The high frequency accuracy of the 2558A ( 50 ppm ) also enables it to be used to calibrate frequency meters.

Multiple 2558As can be synchronized using the internal phase shifter. This means that two 2558As can be used as accurate sources of voltage and current for calibrating power meters.

# 2558A

## AC Voltage Current Standard

# Application



## Calibration and test for meters

The 2558A provides specific functions to enable meters to be calibrated accurately and efficiently.

### Using the output divider and deviation

Calibrating two or more points is quick and simple. It is only necessary to preselect the number of required calibration points with the lower divider control and then use the upper control to step the output to the next calibration point. The deviation settings will then enable the output value and error of each calibration point to be displayed directly.

### Using the output divider and deviation preset


The deviation preset control can be used to move the output value in small increments (2 or 5% of the step between calibration points).

This means that it is possible to finely approach the target calibration point, either from a lower value or a higher one, without exceeding it. This is particularly useful when the friction (hysteresis) of the moving part needs to be taken into consideration. In this case the point is calibrated twice, once from a lower value and once more from a higher value and the final calibration result is the average of the two.


### Using sweep

Needle sticking tests can be performed with high repeatability.

It is possible to stop at any point and sweep around it in fine detail.



From a lower value



From a higher value




# AC Voltage Current Standard 2558A

## Power calibration

A power calibration system can be created by using two 2558As (one each for AC voltage and AC current) together with a Yokogawa WT5000 Precision Power Analyzer as the reference.

One of the 2558As acts as the master unit and provides the synchronizing oscillator signal. The required power factor is set by adjusting the phase shifter on the slave unit and monitoring the result on the WT5000.

A 3 phase power calibrator system can be simply built by adding further 2558As.

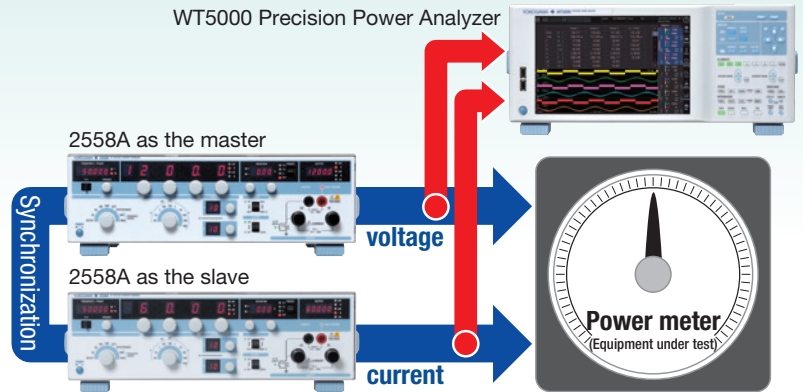


## Higher current output

To generate higher current than 72 A, two 2558As can be connected to double the output to 144 A.

Condition :

- Accuracy, stability, temperature coefficient is the sum of the individual units.
- 50/60 Hz only.

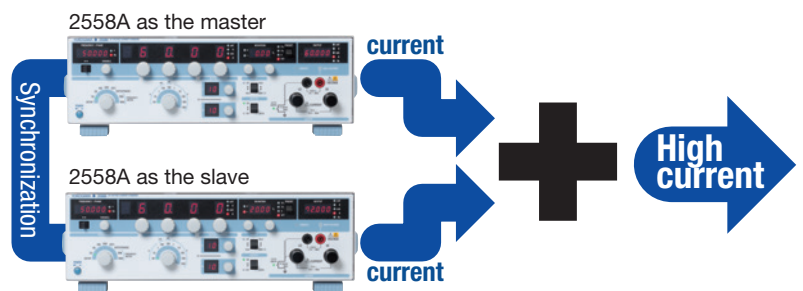

## Use existing 2558 programs

The 2558A is backwardly compatible with the previous 2558 model. The new 2558A supports a 2558 command mode, which means that you can switch from the 2558 to the 2558A without modifying your program. It is also possible to mix 2558s and new 2558As in the same system.\*

\* Programs may need to be modified due to the improvement in the response time etc.



## Comparison with the 2558

|                |  | 2558A                                     | 2558                        |
|----------------|--|---|-----------------------------|
| AC Voltage     | Output range of the specified accuracy | 1.00 mV to 1200.0 V                       | 1.00 mV to 1200.0 V         |
|                | Accuracy (50/60 Hz)                    | ± 400 ppm                                 | ± 950 ppm                   |
|                | Frequency of the specified accuracy    | 40 to 1000 Hz                             | 50 / 60 / 400 Hz            |
| AC Current     | Output range of the specified accuracy | 1.00 mA to 60.00 A                        | 1.00 mA to 60.00 A          |
|                | Accuracy (50/60 Hz)                    | ± 500 ppm                                 | ± 950 ppm                   |
|                | Frequency of the specified accuracy    | 40 to 1000 Hz                             | 50 / 60 / 400 Hz            |
| Frequency      | Output range                           | 40 to 1000 Hz                             | 40 to 500 Hz                |
|                | Accuracy                               | ± 50 ppm                                  | ± 1%                        |
| Max. output    |  | Approx. 36 VA (60 A/0.6 V)                | Approx. 36 VA (60 A/0.6 V)  |
| Stability      |  | ± (20 ppm of setting + 30 ppm of range)/h | ± (0.03% of range)/h        |
| Dimension (mm) |  | 426 (W) × 132 (H) × 400 (D)               | 439 (W) × 149 (H) × 415 (D) |

# Rear Panel



- 1 GP-IB interface (optional, /C1)
- 2 Ethernet
- 3 USB interface (for PC connection)
- 4 Input terminals for synchronized operation
- 5 Output terminals for synchronized operation

## Specification

### Output

| Range  | Output range   | Specified output range* | Resolution  | Maximum output |
|--------|----------------|-------------------------|-------------|----------------|
| 100 mV | 0 to 144.00 mV | 1 to 120.00 mV          | 10 $\mu$ V  | —              |
| 1 V    | 0 to 1.4400 V  | 0.01 to 1.2000 V        | 100 $\mu$ V | 0.5 A or more  |
| 10 V   | 0 to 14.400 V  | 0.1 to 12.000 V         | 1 mV        | Approx. 3 A    |
| 100 V  | 0 to 144.00 V  | 1 to 120.00 V           | 10 mV       | Approx. 0.3 A  |
| 300 V  | 0 to 432.0 V   | 3 to 360.0 V            | 100 mV      | Approx. 0.1 A  |
| 1000 V | 0 to 1440.0 V  | 10 to 1200.0 V          | 100 mV      | Approx. 6 mA   |
| 100 mA | 0 to 144.00 mA | 1 to 120.00 mA          | 10 $\mu$ A  | Approx. 15 V   |
| 1 A    | 0 to 1.4400 A  | 0.01 to 1.2000 A        | 100 $\mu$ A | Approx. 15 V   |
| 10 A   | 0 to 14.400 A  | 0.1 to 12.000 A         | 1 mA        | Approx. 3 V    |
| 50 A   | 0 to 72.00 A   | 0.5 to 60.00 A          | 10 mA       | Approx. 0.6 V  |

Condition Frequency : Internal oscillator \* 1% to 144% of range when frequency is 50 or 60 Hz  
 Temperature/Humidity : 23  $\pm$  3  $^{\circ}$ C/20 to 80 %RH  
 Add the temp. coefficient at 5 to 20 $^{\circ}$ C, 26 to 40 $^{\circ}$ C

### Accuracy

| Upper : 180 days<br>Lower : 1 year |               |                              |                         |          |                              |                         |
|------------------------------------|---------------|------------------------------|-------------------------|----------|------------------------------|-------------------------|
| 10% to 120% of range               |               |                              | 1% to 10% of range      |          |                              |                         |
| $\pm$ (% of setting + % of range)  |               |                              | $\pm$ (% of range)      |          |                              |                         |
| Range                              | 50/60 Hz      | 40 Hz $\leq$ f $\leq$ 400 Hz | 400 Hz < f $\leq$ 1 kHz | 50/60 Hz | 40 Hz $\leq$ f $\leq$ 400 Hz | 400 Hz < f $\leq$ 1 kHz |
| 100 mV                             |               |                              |                         |          |                              |                         |
| 1 V                                |               |                              |                         |          |                              |                         |
| 10 V                               | 0.03 + 0.01*  | 0.05 + 0.01                  | 0.10 + 0.02             | 0.013    | 0.015                        | 0.030                   |
| 100 V                              | 0.04 + 0.01*  | 0.06 + 0.01                  | 0.11 + 0.02             | 0.014    | 0.016                        | 0.031                   |
| 300 V                              |               |                              |                         |          |                              |                         |
| 1000 V                             |               |                              |                         |          |                              |                         |
| 100 mA                             |               |                              |                         |          |                              |                         |
| 1 A                                | 0.04 + 0.01*  | 0.06 + 0.01                  | 0.12 + 0.02             | 0.014    | 0.016                        | 0.032                   |
| 10 A                               | 0.055 + 0.01* | 0.075 + 0.01                 | 0.135 + 0.02            | 0.0155   | 0.0175                       | 0.0335                  |
| 50 A                               |               |                              |                         |          |                              |                         |

\* Add 0.1% of range when output is 120% to 144% of range

#### Stability

$\pm$  (20 ppm of setting + 30 ppm of range)  
 Condition Output : 1 to 120% of range  
 Frequency : Internal oscillator  
 Temperature/Humidity : 23 $\pm$ 3 $^{\circ}$ C / 20 to 80%RH  
 Time : 1 min. to 1 hour after output ON

#### Temperature Coefficient (5 to 20 $^{\circ}$ C, 26 to 40 $^{\circ}$ C)

50/60 Hz :  $\pm$ (30 ppm of setting/ $^{\circ}$ C)  
 Other :  $\pm$ (50 ppm of setting/ $^{\circ}$ C)

#### Distortion Factor

Voltage output : 0.07% or less  
 Current output : 0.18% or less  
 Condition Output : 40 to 120% of range\*  
 Load : Resistance only  
 20% of the max. output or less  
 (Current at the voltage output,  
 or voltage at the current output)  
 Frequency : 40 to 1000 Hz

\* 40 to 144% of range when frequency is 50 or 60 Hz

# Specification

# AC Voltage Current Standard 2558A

## Frequency range

|                     |  |
|---------------------|--|
| Accuracy (internal) | : ± 50 ppm (180 days)<br>± 100 ppm (1 year)  |
| Mode                | : Internal / External / FREQUENCY METER  |
| Internal            | : 50 / 60 / 400 Hz<br>VAR (40 to 1000 Hz, 0.001 Hz resolution)   |
| External            | : EXT1 / EXT2<br>(Use the terminals for the synchronized operation)  |
| FREQUENCY METER     | : MIN/MAX<br>Range : 20 to 1000 Hz<br>Resolution : 0.001 Hz<br>Sweep, output divider and deviation functions are used for the frequency. |

## Sweep

|        |  |
|--------|--|
| Target | : Voltage / Current / Frequency  |
| Speed  | : Approx. 8*/16/32/64 sec. selectable<br>During 0 to 100%, 100 to 0% of setting<br>* Firmware version 1.04 or later. |

## Output divider

|             |                                 |
|-------------|---------------------------------|
| Target      | : Voltage / Current / Frequency |
| Denominator | : m 4 to 15                     |
| Numerator   | : n 0 to 15 (n ≤ m)             |

## Deviation

|                  |   |
|------------------|---|
| Target           | : Voltage / Current / Frequency   |
| Variable range   | : ±20.00%   |
| Operation        | : Two dials<br>Resolution of the first dial : 0.2% of the main setting<br>Resolution of the second dial : 0.01% of the main setting |
| Deviation preset | : OFF / 0 / 2% / 5%   |

## Output terminal

|      |   |
|------|---|
| Type | Voltage : Plug-in terminal (safety terminal)<br>Current : Large binding post<br>Selectable LO terminal to earth or floating.<br>Max. floating voltage to earth : 12 Vpk |
|------|---|

## Display

|                 |                          |
|-----------------|--------------------------|
| Main setting    | : 5 digits LED           |
| Output Divider  | : 2 digits LED (m and n) |
| Deviation       | : 4 digits LED           |
| Output          | : 5 digits LED           |
| Frequency/Phase | : 6 digits LED           |

## SETUP

|         |  |
|---------|--|
| Setting | : Communication, Beep sound, Sweep speed, Earth/Floating |
| Status  | : Self test, Error log, Product Information              |

## External I/O

|  |   |
|--|---|
| Sync. Terminals (two input terminals and two output terminals) | I/O voltage : 3±0.1 Vrms, 2 phase sine wave<br>Frequency : 40 to 1000 Hz<br>Input resistance : Approx. 1 MΩ<br>Output resistance : Approx. 50 Ω |
|--|---|

## USB PC interface (for PC connection)

|  |                                 |
|--|---------------------------------|
| Connector                                | : Type B connector (receptacle) |
| Electrical and mechanical specifications | : Complies with USB Rev. 2.0    |
| Supported transfer modes                 | : High Speed, Full Speed        |

## Ethernet interface

|  |                              |
|--|------------------------------|
| Connector                                | : RJ-45 connector            |
| Electrical and mechanical specifications | : Confirms to the IEEE 802.3 |
| Transmission methods                     | : 100 BASE-TX / 10 BASE-T    |


## GP-IB interface (/C1 optional)

|  |   |
|--|---|
| Electrical and mechanical specifications | : Complies with IEEE St'd 488-1978              |
| Functional specifications                | : SH1, AH1, T6, L4, SR1, RL1, PPO, DC1, DT1, C0 |
| Address                                  | : 0 to 30                                       |

## General specifications

|  |  |
|--|--|
| Warm-up time                                       | : Approx. 30 minutes   |
| Operating environment                              | : Temperature : 5 to 40°C<br>Humidity : 20 to 80%RH (no condensation)<br>Attitude 2000 m or less |
| Installation locations                             | : Indoors  |
| Storage environment                                | : Temperature -15 to 60°C<br>Humidity 20 to 80%RH (no condensation)                              |
| Rated power supply voltage                         | : 100 to 120 VAC / 200 to 240 VAC  |
| Allowable power supply voltage fluctuation range   | : 90 to 132 VAC / 180 to 264VAC  |
| Rated power supply frequency                       | : 50/60 Hz   |
| Allowable power supply frequency fluctuation range | : 48 to 63 Hz  |
| Max. power consumption                             | : 200 VA   |
| Weight   | : Approx. 20 kg  |
| Dimensions   | : 426(W) x 132(H) x 400(D) mm  |

## Accessories



**B8506ZK**  
**Measurement lead set**

2 pieces (red and black) in 1 set, length: 1.00 m Used in combination with the B8506ZL, 701959, 758921, 758922, or 758929. Rating: 1500 V CAT I/19 A



**B8506WA**  
**Measurement lead set**

2 pieces (red and black) in 1 set, length : 1.5 m, Rating : 80 A



**758917**  
**Measurement lead set**

2 pieces (red and black) in 1 set, length: 0.75 m Used in combination with the B8506ZL, 701959, 758921, 758922, or 758929. Rating: 1000 V CAT II/32 A



**758922**  
**Small Alligator clip adapter set**

Safety terminal (banana female)-to-alligator clip adapter 2 pieces (red and black) in 1 set Rating: 300 V CAT II Connected to the B8506ZK, 758933, 758917, or 701901.



**B8506ZL**  
**Large Alligator clip adapter set**

Safety terminal (banana female)-to-alligator clip adapter 2 pieces (red and black) in 1 set Rating: 1500 V CAT I Connected to the B8506ZK, 758933, 758917, or 701901.



**758921**  
**Fork terminal adapter set**

Two adapters (red and black) to a set. Used when attaching banana plug to binding post.



**701902 / 701903**  
**Safety BNC-BNC cable**

701902: Length 1 m, 1000 V CAT II  
701903: Length 2 m, 1000 V CAT II



**758923**  
**Safety terminal adapter set**

Spring-hold type (banana male) 2 pieces in 1 set. Easy attachment/detachment of the cable.



**758931**  
**Safety terminal adapter set**

Screw-fastened type (banana male) 2 pieces in 1 set. Comes with a B9317WD 1.5 mm hexagonal wrench for fixing the cable in place.

\* Wire diameter of cables that can connect to the adapter  
758923 Core wire diameter: 2.5 mm or less, insulation diameter: 5.0 mm or less  
758931 Core wire diameter: 1.8 mm or less, insulation diameter: 3.9 mm or less

Due to the nature of the product, it is possible for the user to come in contact with metal parts and receive electric shock. Exercise caution when using the product.

# AC Voltage Current Standard 2558A


| Model and Suffix Codes |             |                             |
|------------------------|-------------|-----------------------------|
| Model                  | Suffix code | Description                 |
| 2558A                  |             | AC Voltage Current Standard |
| Power cord             | -D          | UL/CSA standard, PSE        |
|                        | -F          | VDE standard                |
|                        | -R          | AS standard                 |
|                        | -Q          | BS standard                 |
|                        | -H          | GB standard                 |
|                        | -N          | NBR standard                |
| Option*                | /C1         | GP-IB interface             |

\* The /C1 option cannot be retrofitted to a 2558A already purchased.

| Standard Accessories                       |                       |
|--|-----------------------|
| Part name                                  | Quantity              |
| Power cord                                 | 1                     |
| Measurement lead set (B8506ZK)             | 1 set (red and black) |
| Measurement lead set (B8506WA)             | 1 set (red and black) |
| Large alligator clip adapter set (B8506ZL) | 1 set (red and black) |
| Rubber leg cap                             | 1 set (2)             |
| User's manual                              | 1 set                 |

| Rack Mount Kits |                |             |
|-----------------|----------------|-------------|
| Model           | Suffix code    | Description |
| 751535-E3       | Rack mount kit | For EIA     |
| 751535-J3       | Rack mount kit | For JIS     |

| Optional Accessories |                             |  |
|----------------------|-----------------------------|--|
| Model                | Part name                   | Description                              |
| 758933               | Measurement lead set        | Rating 1000 V, 1 m, 2 leads in a set     |
| B8506ZK              | Measurement lead set        | Rating 1500 V, 1 m, 2 leads in a set     |
| B8506WA              | Measurement lead set        | Rating 80 A, 1.5 m, 2 leads in a set     |
| 758917               | Measurement lead set        | Rating 1000 V, 75 cm, 2 leads in a set   |
| 758922               | Alligator clip adapter set  | Rating 300 V, 2 adapters in a set        |
| 758929               | Alligator clip adapter set  | Rating 1000 V, 2 adapters in a set       |
| B8506ZL              | Alligator clip adapter set  | Rating 1500 V, 2 adapters in a set       |
| 758921               | Fork terminal adapter set   | Banana-fork adapter, 2 adapters in a set |
| 701902               | Safety BNC-BNC cable        | 1.0 m                                    |
| 701903               | Safety BNC-BNC cable        | 2.0 m                                    |
| 758923               | Safety terminal adapter set | Spring-hold type, 2 adapters in a set    |
| 758931               | Safety terminal adapter set | Screw-fastened type, 2 adapters in a set |

 Due to the nature of this product, it is possible to touch its metal parts. Therefore, there is a risk of electric shock, so the product must be used with caution. Actual allowable voltage is the lower of the voltages specified for the main unit and accessory.


This is a Class A instrument based on Emission standards EN61326-1 and EN55011, and is designed for an industrial environment. Operation of this equipment in a residential area may cause radio interference, in which case users will be responsible for any interference which they cause.

## Yokogawa's Approach to Preserving the Global Environment

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.

## NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.

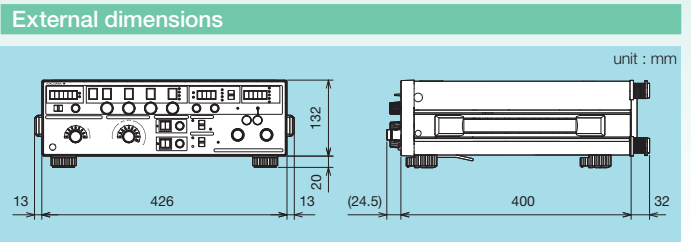

## Related Product

### 2553A

Small and light  
Precision DC Calibrator

**Accuracy** Voltage:  $\pm 0.0075\%$   
Current:  $\pm 0.0120\%$

**Stability**  $\pm 15$  ppm/h

**Noise**  $2 \mu\text{Vrms}$

**Resolution** 5.5 digits,  $\pm 120000$  count display

**Range** Voltage:  $\pm 32$  V, Current:  $\pm 120$  mA  
Thermocouple, RTD



### 2560A

High output  
Precision DC Calibrator

**Accuracy** Voltage:  $\pm 0.0050\%$ , Current:  $\pm 0.0070\%$

**Stability** Voltage:  $\pm 10$  ppm/h, Current:  $\pm 20$  ppm/h

**Resolution** 5.5 digits,  $\pm 120000$  count display  
6.5 digits,  $\pm 1200000$  count display  
(in high resolution mode)

**Range** Voltage:  $\pm 1224$  V  
Current:  $-12.24$  A to  $+36.72$  A  
Thermocouple, RTD



# YOKOGAWA

YOKOGAWA TEST & MEASUREMENT CORPORATION  
Global Sales Dept. /E-mail: tm@cs.jp.yokogawa.com

YOKOGAWA CORPORATION OF AMERICA  
YOKOGAWA EUROPE B.V.  
YOKOGAWA TEST & MEASUREMENT (SHANGHAI) CO., LTD.  
YOKOGAWA ELECTRIC KOREA CO., LTD.  
YOKOGAWA ENGINEERING ASIA PTE. LTD.  
YOKOGAWA INDIA LTD.  
YOKOGAWA ELECTRIC CIS LTD.  
YOKOGAWA AMERICA DO SUL LTDA.  
YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)

<https://tmi.yokogawa.com/us/>  
<https://tmi.yokogawa.com/eu/>  
<https://tmi.yokogawa.com/cn/>  
<https://tmi.yokogawa.com/kr/>  
<https://tmi.yokogawa.com/sg/>  
<https://tmi.yokogawa.com/in/>  
<https://tmi.yokogawa.com/ru/>  
<https://tmi.yokogawa.com/br/>  
<https://tmi.yokogawa.com/bh/>

<https://tmi.yokogawa.com/>

YMI-N-MI-M-E03

The contents are as of March 2022. Subject to change without notice.  
Copyright © 2013, Yokogawa Test & Measurement Corporation  
[Ed: 05/b] Printed in Japan, 203(KP)