

# A High Performance – Handheld Base Station Analyzer

MT8222A


BTS Master™

## Introduction

High performance handheld base station analyzer with a complete set of measurement tools, spectrum analyzer, cable and antenna analysis, power meter, Bit Error Rate Tester for communication backhaul, supports multiple modulation formats GSM/GPRS/EDGE, W-CDMA/HSDPA, CDMA/EVDO, WiMAX 802.16d/802.16e, TD-SCDMA and GPS.

## High Performance Highlights

- Spectrum Analyzer 100 kHz to 7.1 GHz
- 2 port Cable & Antenna Analyzer 10 MHz to 4 or 6 GHz
- High Accuracy Power Meter  $\pm 0.16$  dB
- 4 kg (9.0 lbs)
- Bit Error Rate Tester E1, T1 & T3
- Interference Analyzer
- Channel scanner
- GPS receiver option
- 2 and 2.5G modulation options GSM/GPRS/EDGE, IS-95
- 3G Modulation options W-CDMA/HSDPA, 1xrtt/EVDO and TD-SCDMA
- 3.5G modulation options 802.16d and 802.16e
- 2.5 – 3 hour battery life

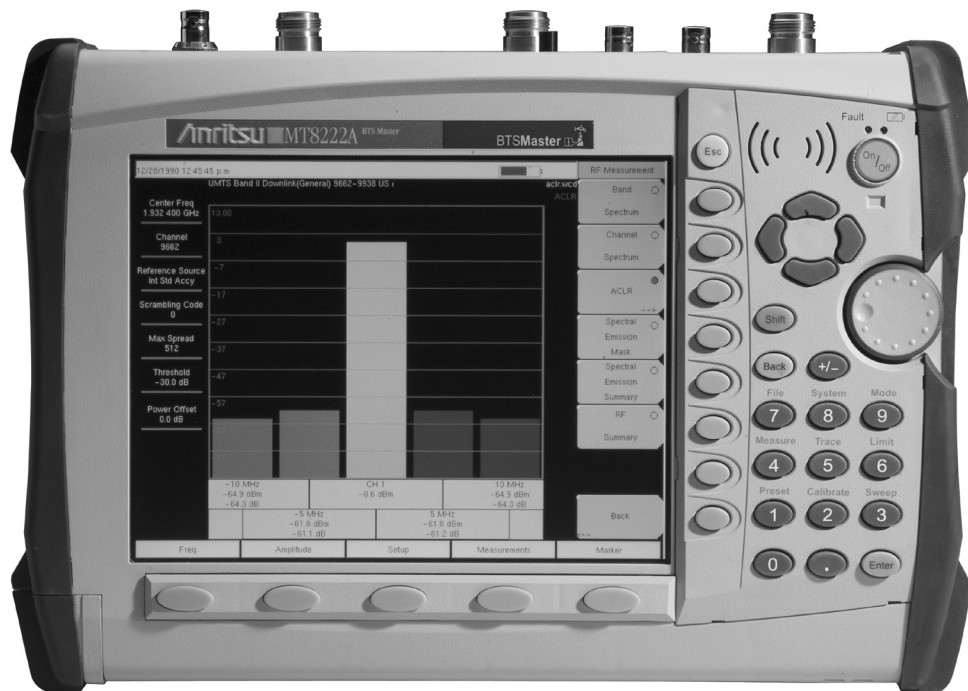

The Anritsu MT8222A is the most advanced ultra-portable base station analyzer on the market, featuring unparalleled performance at a modest price.

## Specifications

### Cable and Antenna Analyzer

**Frequency Range:** 10 MHz to 4 GHz

**Frequency Range (Option 26):**

10 MHz to 6 GHz (All other specs remain the same)

**Frequency Accuracy:** 25 ppm

**Frequency Resolution:** 10 kHz

**Data Points:** Low, Medium, High (137/275/551)

**Interference Immunity:**

On-Channel: +17 dBm

On-Frequency: 0 dBm (RF Out) +30 dBc RF in

**1-Port Power:** High: 0 dBm (typical)

**2-Port Power:**

High: 0 dBm (typical)

Low: -35 dBm (typical)

**Corrected Directivity:** 42 dB (10 MHz to 6 GHz)

**1-Port Accuracy:**

$= <0.8 + |20 \log(1 \pm 10^{\text{error}})|$  dB, typical EΔ =

Directivity – Measured Return Loss

**System Dynamic Range:**

80 dB, 10 MHz to 3 GHz

70 dB, >3 GHz to 5.5 GHz

65 dB, >5.5 GHz to 6 GHz

**Return Loss:**

Range: 0 to 60 dB

Resolution: 0.01 dB

**VSWR:**

Range: 1 to 65

Resolution: 0.01

**Cable Loss:**

Range: 0 to 30 dB

Resolution: 0.01 dB

**1-Port Phase:**

Range: -180° to +180°

Resolution: 0.01°

**Smith Chart:**

Resolution: 0.01

**2-Port Gain:**

Range: -120 to 100 dB

Resolution: 0.01 dB

**2-Port Phase:**

Range: -180° to +180°

Resolution: 0.01°

**Distance-to-Fault:**

Fault Resolution (meters):  $(1.5 \times 10^8 \times v_p) / \Delta F$  vp is

the propagation constant and  $\Delta F$  is F2-F1 in Hz

Horizontal Range (meters): 0 to (data points-1) x

Fault Resolution to a maximum of 1500m (4921 ft.)

where datapoints = 137/275/551

**Vertical Range (Return Loss):** 0 to 60 dB

**Vertical Range (VSWR):** 1 to 65

### Spectrum Analyzer

**Frequency:**

**Frequency:** 100 kHz to 7.1 GHz

**Maximum Continuous Input:** +30 dBm

**Tuning Resolution:** 1 Hz

**Frequency Reference:**

Aging:  $\pm 1$  ppm/10 years

Accuracy:  $\pm 0.3$  ppm (25 °C  $\pm 25$  °C) + aging

**Frequency Span:**

10 Hz to 7.1 GHz plus 0 Hz (zero span)

**Sweep Time:**

Minimum 100 ms, 10  $\mu$ s to 600 seconds (zero span)

**Sweep Trigger:** Free run, Single, Video, External

**Resolution Bandwidth:**

(-3 dB width)  $\pm 10\%$ , 1 Hz to 3 MHz in

1-3 sequence 8 MHz demodulation bandwidth

**Video Bandwidth:**

(-3 dB) 1 Hz to 3 MHz in 1-3 sequence

**SSB Phase Noise:**

-100 dBc/Hz max at 10, 20 and 30 kHz offset from

carrier -102 dBc/Hz max at 100 kHz offset from carrier

**Amplitude:**

**Measurement Range:** DANL to +30 dBm

**Absolute amplitude accuracy Power Levels**

$\geq -50$  dBm,  $\leq 35$  dB input attenuation,

**Preamplifier Off:**

100 kHz to  $\leq 10$  MHz  $\pm 1.5$  dB

>10 MHz to 4 GHz  $\pm 1.25$  dB

>4 GHz to 7.1 GHz  $\pm 1.75$  dB

**Displayed Average Noise Level**

(DANL in 1 Hz RBW, 0 dB attenuation,

Reference level -50 dBm, preamp on):

Frequency	Typical	Max
10 MHz to 1 GHz	-163 dBm	-161 dBm
>1 GHz to 2.2 GHz	-160 dBm	-159 dBm
>2.2 GHz to 2.8 GHz	-156 dBm	-153 dBm
>2.8 GHz to 4.0 GHz	-160 dBm	-159 dBm
>4.0 GHz to 7.1 GHz	-158 dBm	-154 dBm

**Input-Related Spurious:**

(-30 dBm input, 0 dB input attenuation,

Span <1.7 GHz)

-70 dBc typical -60 dBc max\*

\*Exceptions:

Input Frequency	Spur Level
1674 MHz	-38 dBc (-48 typical)

**Residual Spurious:**

(Preamplifier on, RF input terminated, 0 dB input attenuation)

-100 dBm max

(Preamplifier off, RF input terminated, 0 dB input attenuation)

-90 dBm max\*\*, 100 kHz to <3200 MHz

-84 dBm max\*\*, 3200 to 7100 MHz

\*\*Exceptions:

**Frequency Max Spur Level (Typical)**

250, 300, and 350 MHz -85 dBm

~4010 MHz -80 dBm (-90 dBm)

~5084 MHz -70 dBm (-83 dBm)

~5894 MHz -75 dBm (-87 dBm)

~7028 MHz -80 dBm (-92 dBm)

**Display Range:**

1 to 15 dB/div in 1 dB steps. Ten divisions displayed

**Amplitude Units Log Scale Modes:**

dBm, dBV, dBmV, dB $\mu$ V

**Attenuator Range:** 0 to 65 dB

**Attenuator Resolution:** 5 dB steps

**Power Meters:**

**Frequency Range:** 10 MHz to 7.1 GHz

**Display Range:** -80 dBm to +80 dBm

**Measurement Range:** -60 dBm to +30 dBm

Offset Range: 0 to +60 dB

**Accuracy:**

-40 dBm <Max  $\leq$  +15 dBm:

10 MHz -4 GHz:  $\pm 1.25$  dB

4 GHz -7.1 GHz:  $\pm 1.75$  dB

Max > +15 dBm:

10 MHz -6.5 GHz:  $\pm 1.75$  dB

6.5 GHz -7 GHz:  $\pm 2$  dB

Max  $\leq$  -40 dBm:

10 MHz -4 GHz:  $\pm 1.5$  dB

4 GHz -7.1 GHz:  $\pm 1.75$  dB

**VSWR:** 1.5:1 typical

**Maximum Power:**

+30 dBm (1W) without external attenuator

### W-CDMA/HSDPA

#### RF Measurements (Option 44)

**Frequency Ranges:**

Bands I - IX

**RF Channel Power**

(Temperature range 15° C to 35° C):

$\pm 0.7$  dB typical

( $\pm 1.25$  dB max)

**Occupied Bandwidth Accuracy:**  $\pm 100$  kHz

**Residual Adjacent Channel**

**Leakage Ratio (ACLR)**

(824 to 894 MHz, 1710 to 2170):

-54 dB typical at 5 MHz offset

-59 dB typical at 10 MHz offset

**Leakage Ratio (ACLR)<sup>1</sup> (2300-2700 MHz):**

-54 dB typical at 5 MHz offset

-57 dB typical at 10 MHz offset

**ACLR Accuracy (Single Channel Active)**

(824 to 894 MHz, 1710 to 2170):

$\pm 0.8$  dB for ACLR  $\geq$  -45 dB at 5 MHz offset

$\pm 0.8$  dB for ACLR  $\geq$  -50 dB at 10 MHz offset

**ACLR Accuracy (Single Channel Active)**

(2300-2700 MHz):

$\pm 1.0$  dB for ACLR  $\geq$  -45 dB at 5 MHz offset

$\pm 1.0$  dB for ACLR  $\geq$  -50 dB at 10 MHz offset

**Frequency Error:  $\pm 10$  Hz + Time Base Error,**

**99% confidence level:**

$\pm 10$  Hz + Time Base Error, 99% confidence level

### W-CDMA Demodulation

#### and W-CDMA/HSDPA

#### Demodulator (Options 45 and 65)

**EVM Accuracy (824 to 894 MHz, 1710 to 2170 MHz):**

(3GPP Test Model 4)  $\pm 2.5\%$ ; 6%  $\leq$  EVM  $\leq 25\%$

(3GPP Test Model 5)  $\pm 2.5\%$ ; 6%  $\leq$  EVM  $\leq 20\%$

(2300 MHz to 2700 MHz)

**EVM Accuracy:**  $\pm 2.5\%$  for 6%  $\leq$  EVM  $\leq 20\%$

**Residual EVM:** 2.5% typical

**Code Domain Power:**

$\pm 0.5$  dB for code channel power  $>$  -25 dB

16, 32, 64 DCPH (test model 1)

16, 32 DCPH (test model 2, 3)

**CPICH (dBm) Accuracy:**  $\pm 0.8$  dB typical

**Scrambling Code:** 3 seconds

### W-CDMA/HSDPA OTA (Option 35)

**Resolution:** 0.1 dB

### Power Monitor (Option 5)

(requires external sensor)

**Display Range:** -80 to +80 dBm (10 pW to 100 kW)

**Measurement Range:**

-40 to +20 dBm (10 nW to 40 mW)

**Offset Range:** 0 to +60 dB

**Resolution:** 0.1 dB or 0.1W

**Accuracy:**

$\pm 1$  dB for  $>$  -40 dBm using 560-7N50 detector

### Bias Tee (Option 10)

**Voltage/Current:**

+12 V, 250, or 500 mA steady state

+15 V, 250, or 500 mA steady state

+18 V, 350 mA steady state

+21 V, 250 mA steady state

+24 V, 250 mA steady state

<sup>1</sup> Depends on reference level, input signal level and single channel conditions

### *Interference Analyzer (Option 25)*

**Strength of the Interferer:** Locate the Interferer

**RSSI:** Collect data up to 72 hours

**Spectrogram:** Collect data up to 72 hours

**Signal ID:**

Monitors one particular frequency or scan the span and identify up to 12 signals. Identifies CDMA, GSM and WCDMA signals with Signal-to-noise ratio greater than 10 dB.

### *Channel Scanner (Option 27)*

**Frequency Range:** 100 KHz to 7.1 GHz

**Frequency Accuracy:**

±10 Hz + Time base error, 99% Confidence level

**Measurement Range:** +20 dBm to -110 dBm

**Channel Power:**

100 kHz to ≤10 MHz ±1.5 dB

>10 MHz to 4 GHz ±1.25 dB

>4 GHz to 7.1 GHz ±1.75 dB

**Adjacent Channel Power Accuracy:** ±0.75 dB

### *GPS (Option 31)*

**GPS Location Indicator:**

Latitude, Longitude and Altitude on display

Latitude, Longitude and Altitude with trace storage

**GPS High Frequency Accuracy**

**when GPS antenna is connected:**

±25 ppb with GPS ON, 3 minutes after satellite lock

**Internal High Accuracy, when**

**GPS antenna is not connected:**

Better than ±50 ppb for 3 days from a High Accuracy

GPS Lock and within 0° C to 50° C ambient temperature

### *GSM/GPRS/EDGE*

#### *RF Measurements (Option 40)*

**Occupied Bandwidth:**

Bandwidth within which 99% of the power transmitted on a single channel lies

**Burst Power:**

±1 dB typical for -50 dBm to +20 dBm (±1.5 dB max)

**Frequency Error:**

±10 Hz + time base error, 99% confidence level

### *GSM/GPRS/EDGE*

#### *Demodulator (Option 41)*

**GSMK Modulation Quality**

**(RMS Phase) Measurement Accuracy:** ±1 deg

**Residual Error (GSMK):** 1 deg

**8PSK Modulation Quality**

**(EVM) Measurement Accuracy:** ±1.5%

**Residual Error (8PSK):** 2.5%

#### *CDMA – RF Measurements (Option 42) and EVDO RF Measurements (Option 62)*

**Channel Power Accuracy:**

±1 dB typical for RF Input from +20 dBm to -50 dBm (±1.5 dB maximum)

#### *cdmaOne and CDMA2000 1xRTT Demodulator (Option 43)*

**Residual Rho:**

>0.995 typical for RF Input from +20 dBm to -50 dBm (>0.99 dB maximum)

**Rho Accuracy:** ±0.005 for Rho >0.9

**Frequency Error:**

±10 Hz + Time base error, 99% confidence level (in slow mode)

**PN Offset:** with 1 x 64 chips

**Pilot Power Accuracy:**

±1 dB typical, relative to Channel Power

**Tau:** ±0.5 μs typical (±1 μs maximum)

### *EVDO Demodulator (Option 63)*

**Demodulator Measurements are**

**EVDO Rev A compatible.**

**Residual Rho:**

>0.995 typical for RF Input from +20 dBm to -50 dBm (>0.99 dB maximum)

**Rho Accuracy:** ±0.01 for Rho >0.9

**Frequency Error:**

±20 Hz + Time base error, 99% confidence level

**PN Offset:** within 1 x 64 chips

**Pilot Power Accuracy:**

±1 dB typical relative to Channel Power

**Tau:** ±0.5 μs typical (±1 μs maximum)

#### *cdmaOne and CDMA2000 1xRTT Over The Air (Option 33) and EVDO Over The Air (Option 34)*

**Over The Air Measurement:**

Nine strongest pilots with Tau and Ec/Io.

Six multipaths relative to strongest pilot.

#### *Fixed WiMAX RF Measurements (Option 46)*

**Channel Power Accuracy<sup>1</sup>:**

±1 dB Typical for +20 dBm to -50 dBm (±1.5 dB max)

#### *Fixed WiMAX Demodulator (Option 47)*

**Residual EVM (rms):**

3% for +20 dBm to -50 dBm (3.5% max.)

**Frequency Error:**

±0.1 ppm + time base error, 99% confidence level

### *Mobile WiMAX Specifications*

**Bandwidths:**

3.5 MHz, 5 MHz, 7 MHz 8.75 MHz, 10 MHz

**Frame Length:** 5 ms, 10 ms

**Zone Types:** PUSC

**DL-MAP Support:**

Regular and Compressed Map, DIUC support

**DL-MAP Auto Decoding:** Convolutional Coding (CC), Convolution Turbo Coding (CTC)

#### *Mobile WiMAX Over the Air (OTA) Measurements (Option 37)*

**Time Interval:** 1 sec – 60 sec

**Measurement Duration:** 72 hours max

**Auto Save:** Yes

**GPS Logging:** Yes

#### *Mobile WiMAX RF Measurements (Option 66)*

**Channel Power Accuracy:**

±1 dB Typical (±1.5 dB max) for +20 dBm to -50 dBm

#### *Mobile WiMAX Demodulator (Option 67)*

**For +20 dBm to -50 dBm, Residual EVM (rms):**

2.5% typical (3% max), at -50 dBm on FCH

**Frequency Error:**

±0.02 ppm + time base error, 99% confidence level

#### *TD-SCDMA RF Measurements (Option 60)*

**Channel Power (RRC):** ±1 dB typical, 1.5 dB max (slot power from +10 dBm to -40 dBm)

### *TD-SCDMA Demodulator (Option 61)*

**Residual EVM (rms):**

3% typical (for P-CCPCH slot, slot power >-50 dBm)

**Freq Error Accuracy:**

±10 Hz typical + time base error (in the presence of a downlink slot)

**Timing Error (Tau) for dominant SYNC-DL code:**

±0.2 ls (external trigger)

**Supported Modulation:** QPSK

**Spreading Factor:** 1, 16

#### *TD-SCDMA Over the Air (OTA) Measurements (Option 38)*

32 codes displaying Ec/Io, Tau

**Frequency Error:**

±0.02 ppm + time base error, 99% confidence level

#### *T1 Bit-Error-Rate-Tester (BERT), (Option 51)*

**T1 Analyzer, Fractional T1 and sub-channels BER testing at 1.544 MB, 64, 16 and 8 kB rates**

**Line Coding:** AMI, B8ZS

**Framing Modes:**

D4 (Superframe), ESF (Extended Superframe)

**Connection Configurations:**

Terminate: 100 Ω

Bridge: ≥1000 Ω

Monitor: Connect via 20 dB pad in DSX

**Receiver Sensitivity:**

Terminate: +6 dB to -36 dB

Bridge: +6 dB to -36 dB

Monitor: 20 dB flat gain

**Transmit Level:** 0 dB, -7.5 dB, and -15 dB Clock

**Sources:** External Bits Clock

**Internal:** 1.544 MHz ±5 ppm

**Pulse Shapes:** Conform to ANSI T1.403 and ITU G.703

**Pattern Generation and Detection:**

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted

QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24,

All ones, All zeros, T1-Daly, User defined (≤32 bits)

**Circuit Status Reports:**

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

**Alarm Detection:** AIS (Blue Alarm), RAI (Yellow Alarm)

**Error Detection:** Frame Bits, Bit, BER, BPV, CRC

**Error Sec Error Insertion:**

Bit, BPV, Framing Bits, RAI, AIS

**Loopback Modes:** Self loop, CSU, NIU, User defined, In-band or Data Link

**Level Measurements:**

Vp-p (±5%), can also display in dBdsx

**Data Log:** Continuous, up to 72 hrs

**T1 Frequency Measurement:** ±5 ppm

**DS0 Channel Access:** Tone Generator

**Frequency:** 100 Hz to 3000 Hz

**Level:** -30 to 0 dBm, with 1 dB steps

**VF Measurement:**

Frequency: 100 Hz to 3000 Hz, ±3 Hz

Level: -40.0 to +3.0 dBm, ±0.2 dBm

Audio Monitor: Manually select channel 1 to 24

**ITU G-821 Analysis:**

Error seconds (ES), error free seconds (EFS), severely

errored seconds (SES), unavailable seconds (UAS),

available seconds (AS), degrade minutes (DGRM)

<sup>1</sup>Channel power accuracy will vary with amount of data burst traffic

## *E1 - 2 MB/s Bit-Error-Rate-Tester (BERT), (Option 52)*

### **E1 - 2 MB/s Analyzer, sub-channels**

#### **BER testing:**

BER testing at 2.048 MB, 64, 16 and 8 kB rates

#### **Line Coding:** AMI, HDB3

#### **Framing Modes:**

PCM30, PCM30CRC-4, PCM31, PCM31CRC-4

#### **Connection Configurations:**

Terminate: 75  $\Omega$  BNC unbalanced,

120  $\Omega$  RJ48C balanced

Bridge: >1000  $\Omega$

Monitor: Connect via 20 dB pad in DSX

#### **Receiver Sensitivity:**

Terminate: +6 dB to -43 dB

Bridge: +6 dB to -43 dB

Monitor: 20 dB flat gain

#### **Clock Sources:**

External Sets clock,

Internal: 2.048 MHz  $\pm$  5 ppm

#### **Pulse Shapes:** Conform to ITU G.703

#### **Pattern Generation and Detection:**

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted

QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24,

All ones, All zeros, User defined ( $\leq$ 32 bits)

#### **Circuit Status Reports:**

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

#### **Alarm Detection:** AIS, RAI, MFAS RAI (PCM-30)

#### **Error Detection:**

Frame Bits, BER (FAS), Bit, CRC-4, E-Bits, BPV

#### **Error Analysis:** Error rates, Error Counts

#### **ITU G-821 Analysis:**

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes

#### **Error Insertion:** E-bit, Framing Bits (FAS), RAI, AIS

#### **Loopback Modes:** Self loopback

#### **Level Measurements:** Vp-p ( $\pm$ 5%)

#### **Data Log:** Continuous, up to 72 hrs

#### **E1 - 2 MB/s Frequency Measurement:** $\pm$ 5 ppm

#### **VF Tone Generator:**

Frequency: 100 Hz to 3000 Hz

Level: -30 to 0 dBm with 1 dB steps

#### **Audio Monitor:** manually select channel 1-31

#### **VF Measurement:**

Frequency: 100 Hz to 3000 Hz  $\pm$ 3 Hz

Level: -40.0 to +3.0 dBm  $\pm$ 0.2 dBm

## *T3/T1/FT1 Bit-Error-Rate-Tester (BERT), (Option 53)*

### **T3 Analyzer**

#### **Line Coding:** B3ZS, AMI

#### **Framing Modes:** Unframed, M13, C-bit

#### **Connection Configurations:**

Terminate (75  $\Omega$ ) BNC unbalanced

Monitor (Connect via 20 dB pad in DSX)

#### **Receiver Sensitivity:** +6 dB to -24 dB

#### **Transmit Level:**

DSX, Low, Pulse shape: conforms to ITU G.703

#### **Clock Sources:**

External, Internal: 44.736 MHz  $\pm$ 5 ppm

#### **Pulse Shapes:** Conform to ANSI T1.102 & ITU G.703

#### **Pattern Generation and Detection:**

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted,

User defined ( $\leq$ 32 bits)

#### **Circuit Status Reports:**

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

#### **Alarm Detection:** AIS (Blue Alarm), RAI (Yellow Alarm)

#### **Error Detection:**

Frame Bits, Bit, BER, BPV, FEBE,

C-bit, P-bit, Error Sec

#### **Error Insertion:** Bit, Framing Bits

#### **Loopback Modes:**

Stuff Bit (M13 & C-bit): 1 of DS1

FEAC (C-bit): DS3, 1 of DS1 all DS1

#### **Level Measurements:**

Vp-p ( $\pm$ 5%), can also display in dBdsx

#### **Data Log:** Continuous, up to 72 hrs

#### **T3 Frequency Measurement:** $\pm$ 5 ppm

#### **ITU G-821 Analysis:**

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes 32 bits)

### **T1 Analyzer, Fractional T1 and sub-channels**

#### **BER Testing:**

BER testing at 1.544 MB, 64, 16 and 8 kB rates

#### **Line Coding:** AMI, B8ZS

#### **Framing Modes:**

D4 (Superframe), ESF (Extended Superframe)

#### **Connection Configurations:**

Terminate: 100  $\Omega$  balanced, Bantam

Bridge:  $\leq$ 1000  $\Omega$

Monitor: Connect via 20 dB pad in DSX

#### **Receiver Sensitivity:**

Terminate: +6 dB to -36 dB

Bridge: +6 dB to -36 dB

Monitor: 20 dB flat gain

#### **Transmit Level:** 0 dB, -7.5 dB, and -15 dB

#### **Clock Sources:**

External Bits clock,

Internal: 1.544 MHz  $\pm$ 5 ppm

#### **Pulse Shapes:** Conform to ANSI T1.403 & ITU G.703

#### **Pattern Generation and Detection:**

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23 Inverted and non-inverted, QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24, All ones, All zeros, T1-Daly, User defined ( $\leq$ 32 bits)

#### **Circuit Status Reports:**

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

#### **Alarm Detection:** AIS (Blue Alarm), RAI (Yellow Alarm)

#### **Error Detection:**

Frame Bits, Bit, BER, BPV, CRC, Error Sec

#### **Error Insertion:** Bit, BPV, Framing Bits, RAI, AIS

#### **Loopback Modes:**

Self loop, CSU, NIU, User defined,

In-band or Data Link

#### **Level Measurements:**

Vp-p ( $\pm$ 5%), can also display in dBdsx

#### **Data Log:** Continuous, up to 72 hrs

#### **T1 Frequency Measurement:** $\pm$ 5 ppm

#### **DS0 Channel Access:**

Tone Generator Frequency: 100 Hz to 3000 Hz

Level: -30 to 0 dBm, with 1 dB steps

#### **VF Measurement:**

Frequency: 100 Hz to 3000 Hz,  $\pm$ 3 Hz

Level: -40.0 to +3.0 dBm,  $\pm$ 0.2 dBm

#### **Audio Monitor:**

Manually select channel 1 to 24

#### **ITU G-821 Analysis:**

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes



*High Accuracy Power Meter  
Specifications using PSN50  
(Option 19)*

**Sensor**

**Measurement Range:** -30 to +20 dBm  
**Frequency Range:** 50 MHz to 6 GHz  
**Input Connector:** Type N, male, 50 Ω  
**Max Input Without Damage:** +33 dBm, ±25 VDC  
**Input Return Loss:**  
 50 MHz to 2 GHz: ≥26 dB  
 2 GHz to 6 GHz: ≥20 dB

**Accuracy**

**Total RSS Measurement Uncertainty (0 to 50° C):**  
 ±0.16 dB\*  
**Noise:** 20 nW max  
**Zero Set:** 20 nW  
**Zero Drift:** 10nW max\*\*  
**Sensor Linearity:** ±0.13 dB max  
**Instrumentation Accuracy:** 0.00 dB  
**Sensor Cal Factor Uncertainty:** ±0.06 dB  
**Temperature Compensation:** ±0.06 dB max  
**Continuous Digital Modulation Uncertainty:**  
 +0.06 dB (+17 to +20 dBm)



PSN50 High Accuracy Power Sensor

*High Accuracy Power Meter  
Specifications using MA24106A  
(Option 19)*

**Sensor**

**Measurement Range:** -40 to +23 dBm  
**Frequency Range:** 50 MHz to 6 GHz  
**Input Connector:** Type N, male, 50 Ω  
**Max Input Without Damage:** +33 dBm, ±25 VDC  
**Input Return Loss:**  
 50 MHz to 2 GHz: >26 dB  
 2 GHz to 6 GHz: >20 dB

**Accuracy**

**Total RSS Measurement Uncertainty (0 to 50° C):**  
 ±0.16 dB\*  
**Noise:** 2.5 nW max  
**Zero Set:** 10 nW  
**Zero Drift:** 3 nW max\*\*  
**Sensor Linearity:** ±0.18 dB max  
**Instrumentation Accuracy:** 0.00 dB  
**Sensor Cal Factor Uncertainty:** ±0.06 dB  
**Temperature Compensation:** ±0.06 dB max  
**Continuous Digital Modulation Uncertainty:**  
 ±0.02 dB (< +18 dBm)  
 ±0.10 dB (>= +18 dB)

*System*

**Measurement Resolution:** 0.01 dB  
**Offset Range:** ±60 dB  
**Interfaces:** USB A/mini-B 2.0

*General Specifications*

**Maximum Continuous Input into Spectrum Analyzer:**  
 10 dB attenuation, +30 dBm, ±50 VDC  
**RF Input VSWR:**  
 2.0:1 maximum, 1.5:1 typical (≥10 dB attenuation)  
**Internal Time Base Accuracy:** ±0.3 ppm  
**Interfaces:**

Type N female RF Connector  
 Type N female RF Out Port and RF In Port (50 Ω)  
 BNC female connectors for external reference and external trigger  
 Reverse BNC connector for GPS antenna  
 E1-2Mb/s (Receive and Transmit):  
 RJ48 (75 Ω) connector and BNC(f) (120 Ω)  
 T1 (Receive and Transmit): Bantam Jack (100 Ω)  
 T1, T3 (Receive and Transmit):  
 Bantam Jack (100 Ω) and BNC (75 Ω)  
 RF Detector: Type N(m) 50 Ω  
 RJ45 connector for Ethernet 10/100-Base T  
 2.5 mm 3-wire cellular headset connector  
 5-pin Mini-B USB 2.0 device connector  
 USB 2.0 Host connector used with PSN50 and USB Flash Drives

**Maximum Input (Damage Level)**

**into Cable and Antenna Analyzer Test Port:**  
 Type N: +23 dBm, ±50 VDC

**Environmental:**

MIL-PRF-28800F Class 2  
 Operating: -10° C to 55° C, humidity 85%  
 Storage: -51° C to 71° C  
 Altitude: 4600 meters, operating and non-operating

**Safety:**

Conforms to EN 61010-1 for Class 1 portable equipment

**Electromagnetic Compatibility:**

Meets European Community requirements for CE marking

**Size:** 315 x 211 x 94 mm (12.4 x 8.3 x 3.7 in.)  
**Weight:** 4 kg (9 lbs.)

\* Excludes mismatch errors.  
 Excludes noise, zero set, zero drift for levels <-20 dBm.  
 Excludes digital modulation uncertainty between +17 and +20 dBm.  
 \*\*After 30 min warm-up

## Ordering Information

### Model

#### MT8222A - BTS Master

100 kHz to 7.1 GHz

### Standard

#### Cable and Antenna Analyzer

Frequency Range: 10 MHz to 4 GHz

#### Spectrum Analyzer

Frequency Range: 100 kHz to 7.1 GHz

#### Power Meter

Frequency Range: 100 kHz to 7.1 GHz

### Optional

#### Interference Analyzer

Frequency Range: 100 kHz to 7.1 GHz

#### Channel Scanner

Frequency Range: 100 kHz to 7.1 GHz

#### W-CDMA/HSDPA Analyzer

Frequency Range: 824 to 894 MHz, 1710 to 2170 MHz, and 2300 to 2700 MHz

#### GSM/GPRS/EDGE Analyzer

Frequency Range: 380 to 400 MHz, 410 to 430 MHz, 450 to 468 MHz, 478 to 496 MHz, 698 to 746 MHz, 747 to 792 MHz, 806 to 866 MHz, 824 to 894 MHz, 890 to 960 MHz, 880 to 960 MHz, 876 to 960 MHz, 870 to 921 MHz, 1710 to 1990 MHz

#### Fixed WiMAX Analyzer

Frequency Range: 2.3 to 2.7 GHz, 3.3 to 3.8 GHz, 5.25 to 5.875 GHz

#### Mobile WiMAX Analyzer

Frequency Range: 2.3 to 2.7 GHz, 3.3 to 3.8 GHz

#### CDMA Analyzer

Frequency Range: 1 MHz to 2.7 GHz

#### EVDO Analyzer

Frequency Range: 1 MHz to 2.7 GHz

#### TD-SCDMA Analyzer

Frequency Range: 400 MHz to 2.7 GHz

### Options

MT8222A-005	Power Monitor (requires external detector)**
MT8222A-010	Bias Tee variable voltage
MT8222A-10A	High Voltage Bias Tee
MT8222A-019	High Accuracy Power Meter (PSN50 sensor not included)
MT8222A-025	Interference Analysis
MT8222A-026	6 GHz Cable and Antenna Analyzer (10 MHz to 6 GHz)
MT8222A-027	Channel Scanner
MT8222A-028	CW Signal Generator (requires CW Signal Generator kit)
MT8222A-031	GPS Receiver (includes GPS antenna, Anritsu part number: 2000-1410)
MT8222A-033	cdmaOne and CDMA2000 1xRTT Over The Air (OTA)****
MT8222A-034	EVDO Over the Air (OTA)****
MT8222A-035	W-CDMA/HSDPA (OTA)****
MT8222A-037	Mobile WiMAX Over The Air (OTA) Measurements
MT8222A-038	TD-SCDMA Over The Air(OTA) Measurements
MT8222A-040	GSM/GPRS/EDGE RF Measurement
MT8222A-041	GSM/GPRS/EDGE Demodulation
MT8222A-042	CDMA RF Measurements
MT8222A-043	cdmaOne and CDMA2000 1xRTT Demodulator
MT8222A-044	W-CDMA/HSDPA RF Measurement
MT8222A-045	W-CDMA Demodulation
MT8222A-046	Fixed WiMAX RF Measurement
MT8222A-047	Fixed WiMAX Demodulation
MT8222A-051	T1/FT1 BERT (Bit-Error-Rate-Tester)**
MT8222A-052	E1-2 Mb/s Bit-Error-Rate-Tester (BERT)**
MT8222A-053	T3/T1/FT1 BERT (Bit-Error-Rate-Tester)**
MT8222A-060	TD-SCDMA RF Measurement
MT8222A-061	TD-SCDMA Demodulation
MT8222A-062	EVDO RF Measurements
MT8222A-063	EVDO Demodulator

MT8222A-064	DVB-T/H Digital Video Measurement
MT8222A-065	W-CDMA/HSDPA Demodulation***
MT8222A-066	Mobile WiMAX RF Measurements
MT8222A-067	Mobile WiMAX Demodulator

### High Accuracy Power Meter Accessories

PSN50	High Accuracy Power Sensor, 50 MHz to 6 GHz
MA24106A	High Accuracy Power Sensor, 50 MHz to 6 GHz
3-2000-1498	USB A/mini-B cable 10 ft
3-1010-122	Attenuator (Bi-directional), 20 dB, 5 watt, DC to 12.4 GHz, N(m) to N(f)
3-1010-123	Attenuator (Bi-directional), 30 dB, 50 watt, DC to 8.5 GHz, N(m) to N(f)
3-1010-124	Attenuator (Uni-directional), 40 dB, 100 watt, DC to 8.5 GHz, N(m) to N(f)

### Standard Accessories

10580-00156	BTS Master User's Guide
65681	Soft Carrying Case
40-168-R	AC/DC Adapter
806-141	Automotive Cigarette Lighter/12 Volt DC Adapter
3-2000-1567	512 MB Compact Flash Memory Module
2000-1520-R	2 GB USB Memory Module
2300-498	Anritsu Master Software Tools
633-44	Rechargeable Battery, Li-Ion
3-2000-1360	USB A/mini-B cable 6 ft.
3-806-152	Cross-over Ethernet cable
1091-27	Adapter, DC to 18 GHz, N(m)-SMA(f), 50 Ω
1091-172	Adapter, DC to 1.3 GHz, N(m) - BNC(f), 50 Ω
One Year Warranty	
Certificate of Calibration and Conformance	

### Optional Accessories

800-109	Detector Extender Cable, 7.6 m (25 ft.)
800-111	Detector Extender Cable, 30.5 m (100 ft.)
2000-1374	Dual External, Li-Ion Charger with Universal Power Supply
2000-1410	Magnet Mount GPS Antenna with 3 m (15 ft) Cable
2000-1501-R	256 MB USB Memory Module
2000-1520-R	2 GB USB Memory Module
760-243-R	Transit Case for Anritsu MT8222A BTS Master
1N50C	Limiters, N(m) to N(f), 50 Ω, 10 MHz to 18 GHz
790-641	Cable Lock
42N50-20	Attenuator, 20 dB, 5 watt, DC to 18 GHz, N(m) to N(f)
42N50A-30	Attenuator, 30 dB, 50 watt, DC to 18 GHz, N(m) to N(f)
22N50	Open/Short, DC to 18 GHz, N(m), 50 Ω
22NF50	Open/Short, DC to 18 GHz, N(f), 50 Ω
SM/PL-1	Precision Load, DC to 6 GHz, 42 dB, N(m), 50 Ω
SM/PLNF-1	Precision Load, DC to 6 GHz, 42 dB, N(f), 50 Ω
OSLN50-1	Precision Open/Short/Load, DC to 6 GHz, 42 dB, 50 Ω, N(m)
OSLNF50-1	Precision Open/Short/Load, DC to 6 GHz, 42 dB, 50 Ω, N(f)
2000-767	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(m), 50 Ω
2000-768	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(f), 50 Ω
1091-26	N(m) to SMA(m) DC to 18 GHz, 50 Ω
1091-27	N(m) to SMA(f) DC to 18 GHz, 50 Ω
1091-80	N(f) to SMA(m) DC to 18 GHz, 50 Ω
1091-81	N(f) to SMA(f) DC to 18 GHz, 50 Ω

\*All the options are upgradeable at Service Centers except T1 option.

\*\*Option 5 and Options 51, 52 and 53 are mutually exclusive.

\*\*\*Option 65 includes Option 45.

\*\*\*\*Requires Option 31 GPS

## Adapters

510-90	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 $\Omega$
510-91	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 $\Omega$
510-92	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 $\Omega$
510-93	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 $\Omega$
510-96	7/16 DIN(m) to 7/16 DIN(m), DC to 7.5 GHz, 50 $\Omega$
510-97	7/16 DIN(f) to 7/16 DIN(f), DC to 7.5 GHz, 50 $\Omega$
510-102	N(m) to N(m) 90° right angle, DC to 11 GHz, 50 $\Omega$

## Precision Adapters

34NN50A	Precision Adapter, DC to 18 GHz, 50 $\Omega$ , N(m) to N(m)
34NFN50	Precision Adapter, DC to 18 GHz, 50 $\Omega$ , N(f) to N(f)

## Directional Antennas

2000-1411	Portable Yagi Antenna, 10 dBd, N(f), 822 to 900 MHz
2000-1412	Portable Yagi Antenna, 10 dBd, N(f), 885 to 975 MHz
2000-1413	Portable Yagi Antenna, 10 dBd, N(f), 1.71 to 1.88 GHz
2000-1414	Portable Yagi Antenna, 9.3 dBd, N(f), 1.85 to 1.99 GHz
2000-1415	Portable Yagi Antenna, 10 dBd, N(f), 2.4 to 2.5 GHz
2000-1416	Portable Yagi Antenna, 10 dBd, N(f), 1.92 to 2.17 GHz

## GPS Antenna

2000-1410	Magnet Mount GPS Antenna with 15 ft. cable
-----------	--

## Portable Antennas

2000-1030	SMA(m), 1.71 to 1.88 GHz, 50 $\Omega$
2000-1031	SMA(m), 1.85 to 1.99 MHz, 50 $\Omega$
2000-1032	SMA(m), 2.4 to 2.5 GHz, 50 $\Omega$
2000-1035	SMA(m), 896 to 941 MHz, 50 $\Omega$
2000-1200	SMA(m), 806 to 869 MHz, 50 $\Omega$
2000-1361	SMA(m), 5725 to 5825 MHz, 50 $\Omega$
2000-1473	SMA(m), 870 to 960 MHz, 50 $\Omega$
2000-1474	SMA(m), 2.41 to 2.5 GHz, 50 $\Omega$
2000-1475	SMA(m), 1920 to 1980, 2.11 to 2.17 GHz, 50 $\Omega$
61532	Antenna Kit: 2000-1030, 2000-1031, 2000-1032, 2000-1035, 2000-1200, and 2000-1361

## Attenuator

42N50A-30	30 dB, 50 watt, Bi-directional, DC to 18 GHz, N(m) to N(f)
-----------	--

## Cables

806-16	Bantam Plug to Bantam Plug
806-116	Bantam Plug to BNC
806-117	Bantam "Y" Plug to RJ48
3-806-169	72-inch (1.8 m), BNC to BNC, 75 $\Omega$ RG59 type coax cable
806-176-R	Bantam Plug to Alligator Clips
806-177-R	RJ48 to RJ48

## Band Pass Filters

1030-105-R	890 to 915 MHz Band, N(m) to N(f), 50 $\Omega$
1030-106-R	1710 to 1790 MHz Band, N(m) to N(f), 50 $\Omega$
1030-107-R	1910 to 1990 MHz Band, N(m) to N(f), 50 $\Omega$
1030-109-R	824 to 849 MHz Band, N(m) to SMA(f), 50 $\Omega$
1030-110-R	880 to 915 MHz Band, N(m) to SMA(f), 50 $\Omega$
1030-111-R	1850 to 1910 MHz Band, N(m) to SMA(f), 50 $\Omega$
1030-112-R	2400 to 2484 MHz Band, N(m) to SMA(f), 50 $\Omega$
1030-114-R	806 to 869 MHz Band, N(m) to SMA(f), 50 $\Omega$

## Test Port Cable Armored

15NN50-1.5C	1.5 meters, N(m) to N(m), 6 GHz, 50 $\Omega$
15NNF50-1.5B	1.5 meters N(m) to N(f), 18 GHz, 50 $\Omega$
15NN50-3.0C	3.0 meters, N(m) to N(m), 6 GHz, 50 $\Omega$
15NN50-5.0C	5.0 meters, N(m) to N(m), 6 GHz, 50 $\Omega$
15NNF50-1.5C	1.5 meters, N(m) to N(f), 6 GHz, 50 $\Omega$
15NNF50-3.0C	3.0 meters, N(m) to N(f), 6 GHz, 50 $\Omega$
15NN50-5.0C	5.0 meters, N(m) to N(m), 6 GHz, 50 $\Omega$
15ND50-1.5C	1.5 meters, N(m) to 7/16 DIN(m), 6 GHz, 50 $\Omega$
15NDF50-1.5C	1.5 meters, N(m) to 7/16 DIN(f), 6 GHz, 50 $\Omega$

## Power Monitor Detectors

560-7N50B	0.01 to 20 GHz
560-7S50B	0.01 to 20 GHz
560-7K50	0.01 to 40 GHz
560-7VA50	0.01 to 50 GHz

## CW Signal Generator Kit

67276	CW Signal Generator Kit (includes the 4 parts listed below)
65-54	Attenuator, 0-90 dB (1 dB and 10 dB steps), 2.5 GHz, N(f), N(f)
510-102	Adaptor, 90°, N(m), N(m)
SC7651	Power Splitter, 50 $\Omega$ , N(f), N(m), N(f)
67263	Cable, N(m), N(m)

# Anritsu

## Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan  
Phone: +81-46-223-1111  
Fax: +81-46-296-1264

## • U.S.A.

### Anritsu Company

1155 East Collins Boulevard, Suite 100,  
Richardson, Texas 75081 U.S.A.  
Toll Free: 1-800-ANRITSU (267-4878)  
Phone: +1-972-644-1777  
Fax: +1-972-671-1877

## • Canada

### Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,  
Ontario K2V 1C3, Canada  
Phone: +1-613-591-2003  
Fax: +1-613-591-1006

## • Brazil

### Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27-1 Andar  
01327-010 - Paraiso, São Paulo, Brazil  
Phone: +55-11-3283-2511  
Fax: +55-11-3886940

## • Mexico

Anritsu Company, S.A. de C.V.  
Av. Ejército Nacional No. 579 Piso 9, Col. Granada  
11520 México, D.F., México  
Phone: +52-55-1101-2370  
Fax: +52-55-5254-3147

## • U.K.

### Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.  
Phone: +44-1582-433280  
Fax: +44-1582-731303

## • France

### Anritsu S.A.

16/18 Avenue du Québec-SILIC 720  
91961 COURTABOEUF CEDEX, France  
Phone: +33-1-60-92-15-50  
Fax: +33-1-64-46-10-65

## • Germany

### Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1  
81829 München, Germany  
Phone: +49 (0) 89 442308-0  
Fax: +49 (0) 89 442308-55

## • Italy

### Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy  
Phone: +39-06-509-9711  
Fax: +39-06-502-2425

## • Sweden

### Anritsu AB

Borgafjordsgatan 13, 164 40 Kista, Sweden  
Phone: +46-8-534-707-00  
Fax: +46-8-534-707-30

## • Finland

### Anritsu AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland  
Phone: +358-20-741-8100  
Fax: +358-20-741-8111

## • Denmark

### Anritsu A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark  
Phone: +45-72112200  
Fax: +45-72112210

## • Spain

### Anritsu EMEA Ltd.

#### Oficina de Representación en España

Edificio Veganova  
Avda de la Vega, nº 1 (edf 8, pl1, of 8)  
28108 ALCOBENDAS - Madrid, Spain  
Phone: +34-914905761  
Fax: +34-914905762

## • Russia

### Anritsu EMEA Ltd.

#### Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.  
Russia, 125009, Moscow  
Phone: +7-495-363-1694  
Fax: +7-495-935-8962

## • United Arab Emirates

### Anritsu EMEA Ltd.

#### Dubai Liaison Office

P O Box 500413 - Dubai Internet City  
Al Thuraya Building, Tower 1, Suite 701, 7th Floor  
Dubai, United Arab Emirates  
Phone: +971-4-3670352  
Fax: +971-4-3688460

## • Singapore

### Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)  
Singapore 118502  
Phone: +65-6282-2400  
Fax: +65-6282-2533

## • India

### Anritsu Pte. Ltd.

#### India Liaison Office

Unit No.S-3, Second Floor, Esteem Red Cross Bhavan,  
No.26, Race Course Road, Bangalore 560 001 India  
Phone: +91-80-32944707  
Fax: +91-80-22356648

## • P. R. China (Hong Kong)

### Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,  
No. 1 Science Museum Road, Tsim Sha Tsui East,  
Kowloon, Hong Kong, P.R. China  
Phone: +852-2301-4980  
Fax: +852-2301-3545

## • P. R. China (Beijing)

### Anritsu Company Ltd.

#### Beijing Representative Office

Room 1515, Beijing Fortune Building,  
No. 5, Dong-San-Huan Bei Road,  
Chao-Yang District, Beijing 100004, P.R. China  
Phone: +86-10-6590-9230  
Fax: +82-10-6590-9235

## • Korea

### Anritsu Corporation, Ltd.

8F Hyunjuk Bldg. 832-41, Yeoksam-Dong,  
Kangnam-ku, Seoul, 135-080, Korea  
Phone: +82-2-553-6603  
Fax: +82-2-553-6604

## • Australia

### Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill  
Victoria, 3168, Australia  
Phone: +61-3-9558-8177  
Fax: +61-3-9558-8255

## • Taiwan

### Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan  
Phone: +886-2-8751-1816  
Fax: +886-2-8751-1817

