

# R&S® SMM100A VECTOR SIGNAL GENERATOR

## Specifications



Specifications  
Version 27.00

**ROHDE & SCHWARZ**

Make ideas real



# CONTENTS

<b>Key facts</b> .....	<b>4</b>
<b>Benefits</b> .....	<b>4</b>
<b>Definitions</b> .....	<b>5</b>
<b>Frequency and baseband main module options</b> .....	<b>6</b>
Frequency options .....	6
<b>Baseband hardware</b> .....	<b>6</b>
<b>RF characteristics</b> .....	<b>6</b>
Frequency .....	6
Frequency sweep .....	7
Reference frequency .....	7
Level .....	9
Level sweep .....	12
Spectral purity .....	13
SSB phase noise with R&S®SMM-B709 option .....	14
List mode .....	16
Phase coherence (R&S®SMM-B90 option) .....	17
<b>Simultaneous modulation</b> .....	<b>17</b>
<b>Analog modulation</b> .....	<b>18</b>
Amplitude modulation (R&S®SMM-K720 option) .....	18
Frequency modulation (R&S®SMM-K720 option) .....	18
Phase modulation (R&S®SMM-K720 option) .....	19
Pulse modulation (R&S®SMM-K22 option) .....	20
Input for external modulation signals .....	21
<b>Modulation sources for analog modulation</b> .....	<b>22</b>
Internal modulation generator .....	22
Multifunction generator (R&S®SMM-K24 option) .....	22
LF output .....	22
High-performance pulse generator (R&S®SMM-K23 option) .....	23
<b>I/Q modulation</b> .....	<b>24</b>
I/Q modulation performance .....	24
Analog I/Q inputs .....	26
<b>Baseband characteristics</b> .....	<b>27</b>
Internal baseband characteristics .....	27
Wideband analog I/Q outputs .....	27
Wideband differential analog I/Q outputs (R&S®SMM-K17 option) .....	28
Digital baseband inputs for wideband baseband .....	29
Baseband generator with ARB (R&S®SMM-B9 option) .....	30
I/Q baseband generator: real-time operation (custom digital modulation) (R&S®SMM-K520 option) .....	32

<b>Baseband enhancements</b> .....	<b>32</b>
Additive white Gaussian noise (AWGN) (R&S®SMM-K62 option) .....	32
Envelope tracking (R&S®SMM-K540 option) .....	32
AM/AM, AM/PM predistortion (R&S®SMM-K541 option) .....	33
User-defined frequency response correction (R&S®SMM-K544 option) .....	33
Crest factor reduction (R&S®SMM-K548 option) .....	33
Notched signals (R&S®SMM-K811 option) .....	33
BER measurement (R&S®SMM-K80 option) .....	34
BLER measurement (R&S®SMM-K80 option) .....	34
ARB Ethernet upload (R&S®SMM-K507 option) .....	35
<b>Signal performance for digital standards and modulation systems</b> .....	<b>36</b>
5G NR (R&S®SMM-K144 option) .....	36
EUTRA/LTE (R&S®SMM-K55 option) .....	38
3GPP FDD (R&S®SMM-K42 option) .....	38
IEEE 802.11be (R&S®SMM-K147 option) .....	40
Custom digital modulation (R&S®SMM-B9, real-time mode) .....	41
<b>Health and utilization monitoring service (HUMS) (R&amp;S®SMM-K980 option)</b> .....	<b>42</b>
<b>Remote control</b> .....	<b>42</b>
<b>Connectors</b> .....	<b>43</b>
Front panel connectors .....	43
Rear panel connectors .....	44
<b>General data</b> .....	<b>45</b>
<b>Ordering information</b> .....	<b>46</b>
Warranty and service .....	47

## Key facts

- Frequency range from 100 kHz to 44 GHz
- High output power up to +18 dBm
- Internal RF modulation bandwidth up to 1 GHz
- Excellent modulation frequency response, error vector magnitude (EVM) and adjacent channel power ratio (ACPR)
- 5G NR signal generation for FR1 and FR2
- Ready for future WLAN requirements for RF frequency and modulation bandwidth
- Convenient operation via touchscreen and block diagram

## Benefits

### Discover excellent signal performance

- Excellent SSB phase noise and EVM performance
- Excellent ACPR/ACLR performance
- Extremely flat frequency response

### Discover baseband capabilities

- Internal real-time signal generation
- Arbitrary waveform generator
- Custom digital modulation

### Discover scalability

- Frequency options
- Keycode extendable bandwidth and ARB memory
- Timed licenses and waveform packs
- Floating licenses

### Discover usability

- Structured and intuitive GUI
- Graphical signal monitoring in real-time
- Automation made easy with context-sensitive help system and SCPI recording
- R&S®SMM-K544 frequency response correction

### Discover applications

- Mobile communication standards
- Ready for the next Wi-Fi generations
- Envelope tracking
- High rate pulse (HRP) ultrawideband (UWB)

# Definitions


## General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

## Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

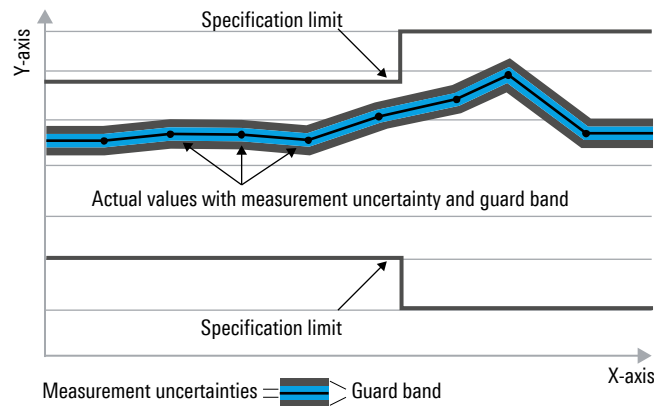

## Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

## Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

## Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

## Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

## Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

## Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

# Frequency and baseband main module options

## Frequency options

One of the following frequency options must be installed:

R&S®SMM-B1006	100 kHz to 6 GHz
R&S®SMM-B1007	100 kHz to 7.5 GHz
R&S®SMM-B1012	100 kHz to 12.75 GHz
R&S®SMM-B1020	100 kHz to 20 GHz
R&S®SMM-B1031	100 kHz to 31.8 GHz
R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O	100 kHz to 44 GHz

The R&S®SMM-B1006, R&S®SMM-B1007 and R&S®SMM-B1012 frequency options include an electronically controlled attenuator, whereas the R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N and R&S®SMM-B1044O options include a mechanically controlled step attenuator.

## Baseband hardware

The wideband baseband section enables RF modulation bandwidths up to 1 GHz by the following additional hardware option:

R&S®SMM-B9	baseband generator with ARB (64 Msample, 120 MHz RF bandwidth)
------------	--

## RF characteristics

### Frequency

Range	R&S®SMM-B1006	100 kHz to 6 GHz
	R&S®SMM-B1007	100 kHz to 7.5 GHz
	R&S®SMM-B1012	100 kHz to 12.75 GHz
	R&S®SMM-B1020	100 kHz to 20 GHz
	R&S®SMM-B1031	100 kHz to 31.8 GHz
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O	100 kHz to 44 GHz
Resolution of setting		0.001 Hz
Resolution of synthesis	$f = 1 \text{ GHz}$	0.053 nHz (nom.)
Setting time	to within $< 1 \cdot 10^{-7}$ for $f > 200 \text{ MHz}$ or $< 124 \text{ Hz}$ for $f < 200 \text{ MHz}$ , with GUI update stopped, I/Q optimization mode: fast, after IEC/IEEE bus delimiter, health and utilization monitoring service (HUMS) off standard	
	R&S®SMM-B1006	< 1.2 ms, 0.9 ms (typ.)
	R&S®SMM-B1007, R&S®SMM-B1012	< 1.4 ms, 1.0 ms (typ.)
	R&S®SMM-B1031	< 1.5 ms, 1.2 ms (typ.)
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O	< 1.5 ms, 1.2 ms (typ.)
Setting time (list mode)	to within $< 1 \cdot 10^{-7}$ for $f > 200 \text{ MHz}$ or $< 124 \text{ Hz}$ for $f < 200 \text{ MHz}$ , with GUI update stopped, I/Q optimization mode: fast, after trigger pulse, health and utilization monitoring service (HUMS) off	
	R&S®SMM-B1006	< 0.8 ms, 0.6 ms (typ.)
	R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020	< 1.0 ms, 0.7 ms (typ.)
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O	< 1.2 ms, 0.9 ms (typ.)
Resolution of phase offset setting		adjustable in 0.1° steps

## Frequency sweep

Operating mode		digital sweep in discrete steps
Trigger modes	execute sweep continuously with internal trigger source	auto
	execute one full sweep	single
	execute one step	step
	sweep start and stop controlled by external trigger signal	start/stop
Trigger source		external trigger signal (INST TRG A at rear), rotary knob, touchpanel, remote control
Sweep range		full frequency range
Sweep shape		sawtooth, triangle
Step size setting resolution	linear	0.001 Hz
	logarithmic	0.01 % to 100 % per step
Dwell time setting range		1 ms to 100 s
Dwell time setting resolution		0.1 ms

## Reference frequency

Frequency error	at time of calibration in production	$< 1 \cdot 10^{-8}$	
Aging	after 30 days of uninterrupted operation	$\leq 1 \cdot 10^{-9}/\text{day}$ , $\leq 1 \cdot 10^{-7}/\text{year}$	
Temperature effect	in temperature range from 0 °C to +45 °C	$\pm 6 \cdot 10^{-8}$	
Warm-up time	to nominal thermostat temperature	$\leq 10$ min (nom.)	
<b>Input for external reference frequency</b>			
Connector type	REF in on rear panel	BNC female	
Input frequency	standard	10 MHz	
	with R&S®SMM-K703 option	10 MHz, 100 MHz	
	with R&S®SMM-K704 option	10 MHz, 1 MHz to 100 MHz, variable	
Input frequency setting resolution	with R&S®SMM-K704 option	0.1 Hz	
Input level range	level limits	0 dBm to 20 dBm	
	recommended input level for optimum phase noise performance	7 dBm to 13 dBm	
Input impedance		50 Ω (nom.)	
Minimum frequency locking range	synchronization bandwidth: wide	$\pm 3 \cdot 10^{-6}$	
	synchronization bandwidth: narrow	$\pm 0.3 \cdot 10^{-6}$	
<b>Output for internal reference frequency</b>			
Connector type	REF OUT on rear panel	BNC female	
Output frequency	standard	sine wave 10 MHz	
	with R&S®SMM-K703 option	sine wave 10 MHz, 100 MHz	
	with R&S®SMM-K704 option	instrument set to internal reference	sine wave 10 MHz
		instrument set to external reference	sine wave 10 MHz, applied external reference frequency
Output level		7 dBm to 14 dBm	
Source impedance		50 Ω (nom.)	
Wideband noise	with R&S®SMM-K703 option, 100 MHz, internal reference, carrier offset = 10 MHz, measurement bandwidth 1 Hz	$< -155$ dBc, $-159$ dBc (typ.)	

<b>1 GHz ultra low noise reference frequency (R&amp;S®SMM-K703 option)</b>		
Input connector type	1 GHz in on rear panel	SMA female
Input frequency		1 GHz
Input level range	level limits	$\geq 6$ dBm, $\leq 20$ dBm
	recommended input level for optimum phase noise performance	7 dBm to 13 dBm
Input impedance		50 $\Omega$ (nom.)
Minimum frequency locking range		$\pm 3 \cdot 10^{-6}$
Output connector type	1 GHz out on rear panel	SMA female
Output frequency		sine wave 1 GHz
Output level		7 dBm to 13 dBm
Source impedance		50 $\Omega$ (nom.)
Wideband noise	1 GHz, internal reference, carrier offset = 10 MHz, measurement bandwidth: 1 Hz	$< -154$ dBc, $-158$ dBc (typ.)
<b>Input for electronic tuning of internal reference frequency</b>		
Connector type	EFC on rear panel	BNC female
Sensitivity	external tuning slope	$1 \cdot 10^{-8}/V$ (typ.)
Input voltage		-10 V to +10 V
Input impedance		10 k $\Omega$ (nom.)

**R&S®SMM-K703 option (100 MHz, 1 GHz reference input/output)**

When this option is installed, the user can use the 1 GHz low noise input and output for synchronization.

In WIDE mode, the signal generator will use this signal directly as a reference for the synthesizer.

This option should be used if a very high phase stability between multiple generators is required.

The 100 MHz low noise input and output mode is only available with this option.

**R&S®SMM-K704 option (flexible reference input)**

When this option is installed, the user can set the reference input frequency in 0.1 Hz steps between 1.0 MHz and 100 MHz.

The signal generator will lock its internal reference oscillator on the input frequency.

**Note on choosing the proper reference synchronization bandwidth**

The user has the choice to set the synchronization bandwidth either to NARROW or WIDE.

In WIDE mode, the best possible phase stability is achieved.

The phase noise performance close to the carrier depends on the phase noise of the external signal source.

In NARROW mode, the reference PLL acts as a clean-up-loop in which the phase noise is mainly determined by the signal generator's internal reference source.

This mode is recommended when using external reference sources with close-to-carrier phase noise worse than the R&S®SMM100A (i. e. rubidium standards).

Please note that due to the slow synchronization, reference locking can take up to 10 s.




## Level

Setting range	$100 \text{ kHz} \leq f < 1 \text{ MHz}$	-145 dBm to +8 dBm	
	$1 \text{ MHz} \leq f < 3 \text{ MHz}$	-145 dBm to +13 dBm	
	$3 \text{ MHz} \leq f \leq 44 \text{ GHz}$	-145 dBm to +30 dBm	
Specified level range	$100 \text{ kHz} \leq f < 1 \text{ MHz}$	-120 dBm to +3 dBm (PEP) <sup>1</sup>	
	$1 \text{ MHz} \leq f \leq 3 \text{ MHz}$	-120 dBm to +8 dBm (PEP) <sup>1</sup>	
	R&S®SMM-B1006, R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020 frequency options		
	$3 \text{ MHz} < f \leq 20 \text{ GHz}$	-120 dBm to +18 dBm (PEP) <sup>1</sup>	
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options		
	$3 \text{ MHz} < f \leq 3 \text{ GHz}$	-120 dBm to +18 dBm (PEP) <sup>1</sup>	
	$3 \text{ GHz} < f \leq 14 \text{ GHz}$	-120 dBm to +17 dBm (PEP) <sup>1</sup>	
	$14 \text{ GHz} < f \leq 20 \text{ GHz}$		
	CW, I/Q modulation, signal bandwidth $\leq 160 \text{ MHz}$	-120 dBm to +15 dBm (PEP) <sup>1</sup>	
	I/Q modulation, signal bandwidth $> 160 \text{ MHz}$	-120 dBm to +12 dBm (PEP) <sup>1</sup>	
	$20 \text{ GHz} < f \leq 29 \text{ GHz}$	-120 dBm to +18 dBm (PEP) <sup>1</sup>	
	$29 \text{ GHz} < f \leq 33 \text{ GHz}$	-120 dBm to +17 dBm (PEP) <sup>1</sup>	
	$33 \text{ GHz} < f \leq 40 \text{ GHz}$	-120 dBm to +15 dBm (PEP) <sup>1</sup>	
$40 \text{ GHz} < f \leq 42 \text{ GHz}$	-120 dBm to +13 dBm (PEP) <sup>1</sup>		
$42 \text{ GHz} < f \leq 44 \text{ GHz}$	-120 dBm to +11 dBm (PEP) <sup>1</sup>		
Resolution of setting		0.01 dB (nom.)	
Level error	level setting characteristic: auto, temperature range from +18 °C to +33 °C		
	$100 \text{ kHz} \leq f \leq 3 \text{ GHz}$	< 0.5 dB	
	$3 \text{ GHz} < f \leq 6 \text{ GHz}$	< 0.7 dB	
	$6 \text{ GHz} < f \leq 20 \text{ GHz}$	< 0.9 dB	
	R&S®SMM-B1031, $20 \text{ GHz} < f \leq 31.8 \text{ GHz}$	< 1.1 dB	
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, $20 \text{ GHz} < f \leq 44 \text{ GHz}$	< 1.2 dB	
Additional level error	I/Q modulation	< 0.3 dB	
	pulse modulation	< 0.5 dB	


<sup>1</sup> PEP = peak envelope power.

Output impedance VSWR in 50 Ω system	ALC state: on	
	R&S®SMM-B1006, 100 kHz < f ≤ 6 GHz	< 1.9, < 1.5 (typ.)
	R&S®SMM-B1007, R&S®SMM-B1012, 100 kHz < f ≤ 12.75 GHz	< 2.0, < 1.6 (typ.)
	R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, 100 kHz < f ≤ 20 GHz	< 2.1, < 1.7 (typ.)
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, step attenuator = 0 dB, 20 GHz < f ≤ 38 GHz	< 2.2, < 1.8 (typ.)
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, step attenuator = 0 dB, 38 GHz < f ≤ 44 GHz	< 2.6, < 2.2 (typ.)
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, step attenuator ≥ 5 dB, 20 GHz < f ≤ 44 GHz	< 2.1, < 1.7 (typ.)
Setting time	to < 0.1 dB deviation from final value, with GUI update stopped, no relay switchover, f > 10 MHz, I/Q optimization mode: fast, health and utilization monitoring service (HUMS): off	
	after IEC/IEEE bus delimiter <sup>2</sup>	< 1 ms, 0.8 ms (typ.)
	with switching of mechanical step attenuator, after IEC/IEEE bus delimiter	< 25 ms
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O, with switching of mechanical step attenuator, after IEC/IEEE bus delimiter	< 30 ms
Setting time (list mode)	to < 0.1 dB deviation from final value, with GUI update stopped, no relay switchover, f > 10 MHz, I/Q optimization mode: fast, health and utilization monitoring service (HUMS): off	
	after trigger pulse <sup>2</sup>	< 0.8 ms, 0.55 ms (typ.)
Interruption-free level setting range	level setting characteristic: uninterrupted level setting	0.01 dB to 20 dB
Reverse power (from 50 Ω source)	maximum permissible RF power in output frequency range of RF path with R&S®SMM-B1006 frequency option; Note: The RF path is switched off if the reverse power exceeds a limit (+27 dBm (meas.), depends on RF frequency).	
	1 MHz < f ≤ 3 GHz	50 W
	3 GHz < f ≤ 6 GHz	10 W
	maximum permissible RF power in output frequency range of RF path with R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	1 MHz < f ≤ 44 GHz	0.5 W
Maximum permissible DC voltage	R&S®SMM-B1006 frequency option	50 V
	R&S®SMM-B1007, R&S®SMM-B1012 frequency options	35 V
	R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	0 V


<sup>2</sup> R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O options: temperature > +18 °C.

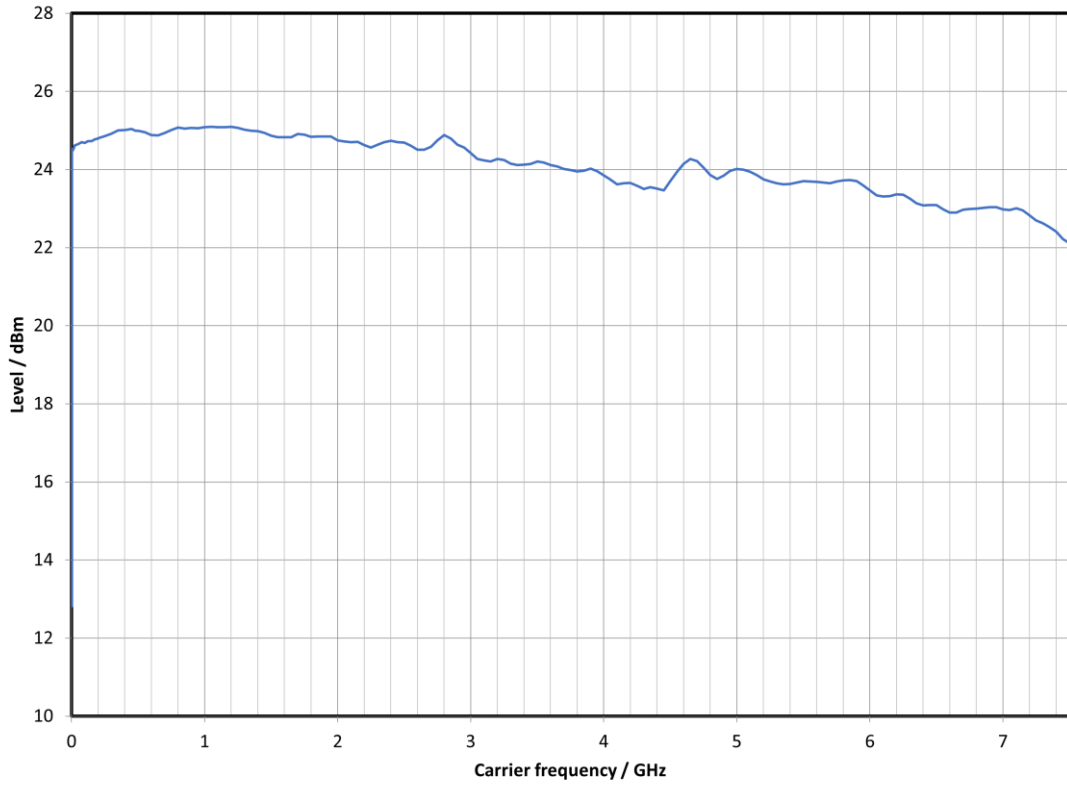

Measured maximum available output level versus carrier frequency with R&S®SMM-B1007 frequency option

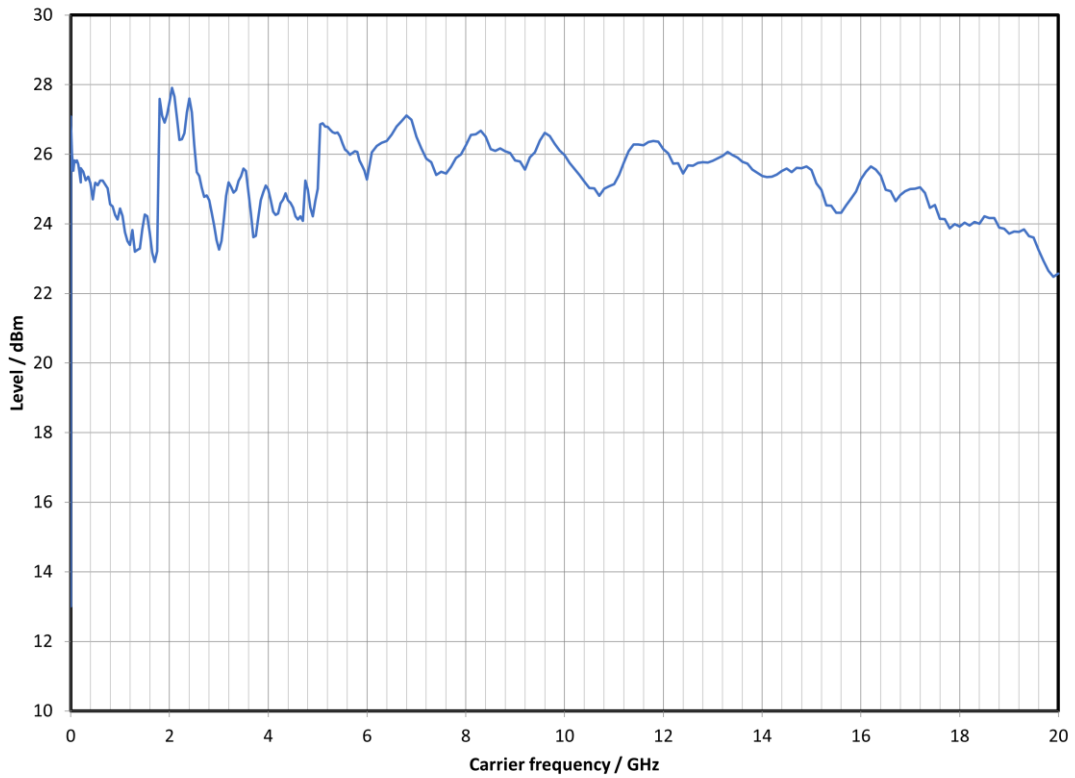

Measured maximum available output level versus carrier frequency with R&S®SMM-B1020 frequency option

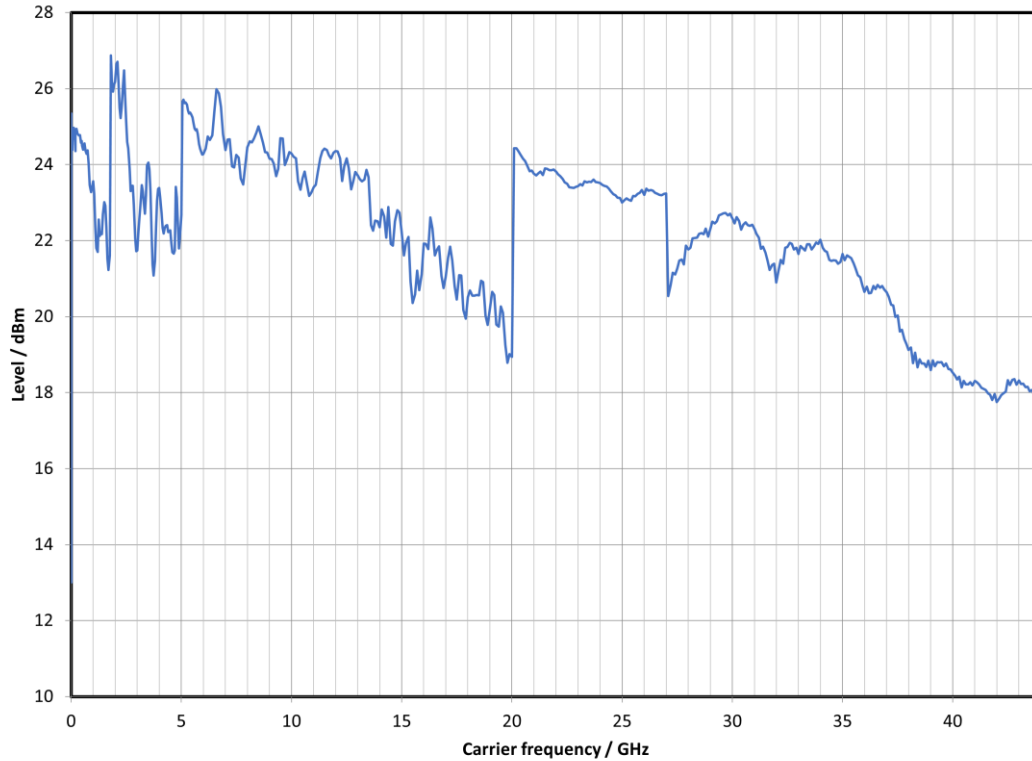

Measured maximum available output level versus carrier frequency with R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options

## Level sweep

Operating mode		digital sweep in discrete steps
Trigger modes	free run	auto
	execute one full sweep	single
	execute one step	step
	sweep start and stop controlled by external trigger signal	start/stop
Trigger source	internal	external trigger signal (INST TRG A at rear), rotary knob, touchpanel, remote control
Trigger slope	external trigger signal	positive, negative
Sweep range	interruption-free level sweep, level setting characteristic: uninterrupted level setting	0.01 dB to 30 dB
Sweep shape		sawtooth, triangle
Step size setting resolution		0.01 dB
Dwell time setting range		1 ms to 100 s
Dwell time setting resolution		0.1 ms

## Spectral purity

Harmonics	CW, $f > 1$ MHz	
	R&S®SMM-B1006 frequency option, level $< 10$ dBm	$< -30$ dBc
	R&S®SMM-B1007, R&S®SMM-B1012 frequency options, level $< 8$ dBm	$< -30$ dBc
	R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options, level $< 10$ dBm	
	$f \leq 3.5$ GHz	$< -30$ dBc
	$f > 3.5$ GHz	$< -55$ dBc
Nonharmonics	CW, I/Q modulation (external wideband I/Q, full-scale DC input), level $> -10$ dBm, $> 10$ kHz offset from carrier and outside of the modulation spectrum	
	100 kHz $\leq f \leq 200$ MHz	$< -80$ dBc
	200 MHz $< f \leq 1500$ MHz	$< -80$ dBc
	1500 MHz $< f \leq 3$ GHz	$< -79$ dBc
	3 GHz $< f \leq 6$ GHz	$< -73$ dBc
	6 GHz $< f \leq 12$ GHz	$< -67$ dBc
	12 GHz $< f \leq 24$ GHz	$< -61$ dBc
	24 GHz $< f \leq 44$ GHz	$< -55$ dBc
Subharmonics	$f \leq 3$ GHz	$< -85$ dBc
	3 GHz $< f \leq 6$ GHz	$< -74$ dBc
	6 GHz $< f \leq 42$ GHz	$< -60$ dBc
	42 GHz $< f \leq 44$ GHz	$< -50$ dBc
Residual FM	RMS value at $f = 1$ GHz	
	300 Hz to 3 kHz	$< 1$ Hz
	20 Hz to 23 kHz	$< 4$ Hz
Residual AM	RMS value (20 Hz to 23 kHz) $< 0.02$ %	
Wideband noise	CW, level = 10 dBm, carrier offset $> 30$ MHz, measurement bandwidth = 1 Hz	
	R&S®SMM-B1006 frequency option	
	20 MHz $\leq f \leq 200$ MHz	$< -146$ dBc, $-149$ dBc (typ.)
	200 MHz $< f \leq 6$ GHz	$< -150$ dBc, $-152$ dBc (typ.)
	R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020 frequency options	
	20 MHz $\leq f \leq 400$ MHz	$< -146$ dBc, $-149$ dBc (typ.)
	400 MHz $< f \leq 5$ GHz	$< -150$ dBc, $-152$ dBc (typ.)
	5 GHz $< f \leq 12$ GHz	$< -147$ dBc, $-149$ dBc (typ.)
	12 GHz $< f \leq 20$ GHz	$< -144$ dBc, $-146$ dBc (typ.)
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	20 MHz $\leq f \leq 200$ MHz	$< -146$ dBc, $-149$ dBc (typ.)
	200 MHz $< f \leq 600$ MHz	$< -148$ dBc, $-150$ dBc (typ.)
	600 MHz $< f \leq 5$ GHz	$< -150$ dBc, $-152$ dBc (typ.)
	5 GHz $< f \leq 12$ GHz	$< -147$ dBc, $-149$ dBc (typ.)
	12 GHz $< f \leq 20$ GHz	$< -144$ dBc, $-146$ dBc (typ.)
	20 GHz $< f \leq 30$ GHz, carrier offset = 30 MHz	$< -135$ dBc, $-138$ dBc (typ.)
	30 GHz $< f \leq 44$ GHz, carrier offset = 30 MHz	$< -131$ dBc, $-134$ dBc (typ.)
	I/Q modulation with full-scale internal single carrier signal, I/Q input gain = +4 dB, level = 10 dBm	
	20 MHz $\leq f \leq 200$ MHz	$< -139$ dBc, $-142$ dBc (typ.)
	200 MHz $< f \leq 1$ GHz	$< -141$ dBc, $-144$ dBc (typ.)
	1 GHz $< f \leq 3$ GHz	$< -142$ dBc, $-145$ dBc (typ.)
	3 GHz $< f \leq 12$ GHz	$< -140$ dBc, $-143$ dBc (typ.)
	R&S®SMM-B1020 frequency option	
	12 GHz $< f \leq 20$ GHz	$< -138$ dBc, $-141$ dBc (typ.)
	R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	12 GHz $< f \leq 20$ GHz	$< -138$ dBc, $-141$ dBc (typ.)
	20 GHz $< f \leq 44$ GHz, carrier offset = 30 MHz	$< -130$ dBc, $-135$ dBc (typ.)


SSB phase noise	CW, standard performance, carrier offset = 20 kHz, measurement bandwidth = 1 Hz, level = 10 dBm or maximum specified output power, whichever is lower	
	20 MHz ≤ f ≤ 200 MHz	< -129 dBc, -134 dBc (typ.)
	f = 1 GHz	< -129 dBc, -134 dBc (typ.)
	f = 2 GHz	< -123 dBc, -128 dBc (typ.)
	f = 3 GHz	< -119 dBc, -124 dBc (typ.)
	f = 4 GHz	< -117 dBc, -122 dBc (typ.)
	f = 6 GHz	< -113 dBc, -118 dBc (typ.)
	f = 10 GHz	< -109 dBc, -114 dBc (typ.)
	f = 20 GHz	< -103 dBc, -108 dBc (typ.)
	f = 30 GHz	< -99 dBc, -104 dBc (typ.)
f = 40 GHz	< -97 dBc, -102 dBc (typ.)	
f = 44 GHz	< -96 dBc, -101 dBc (typ.)	

### SSB phase noise with R&S®SMM-B709 option


Specified values in plain text, measured values in brackets ( ) and *italics*.

SSB phase noise in dBc, 1 Hz measurement bandwidth, CW, level = 10 dBm				
Offset frequency \ Carrier frequency	1 Hz	10 Hz	100 Hz	1 kHz
f = 10 MHz	(-96)	-112	-121	-131
f = 100 MHz	(-77)	-99	-120	-131
f = 1 GHz	(-59)	-83	-104	-124
f = 2 GHz	(-53)	-77	-98	-118
f = 3 GHz	(-49)	-73	-94	-114
f = 4 GHz	(-47)	-71	-92	-112
f = 6 GHz	(-43)	-67	-88	-108
f = 10 GHz	(-39)	-63	-84	-104
f = 20 GHz	(-33)	-57	-78	-98
f = 30 GHz	(-29)	-53	-74	-94
f = 40 GHz	(-27)	-51	-72	-92
f = 44 GHz	(-26)	-50	-71	-91

SSB phase noise in dBc, 1 Hz measurement bandwidth, CW, level = 10 dBm				
Offset frequency \ Carrier frequency	10 kHz	100 kHz	1 MHz	10 MHz
f = 10 MHz	-138	-136	-141	
f = 100 MHz	-138	-136	-141	-149
f = 1 GHz	-139	-137	-144	-152
f = 2 GHz	-133	-131	-138	-152
f = 3 GHz	-129	-127	-134	-152
f = 4 GHz	-127	-125	-132	-152
f = 6 GHz	-123	-121	-128	-151
f = 10 GHz	-119	-117	-124	-145
f = 20 GHz	-113	-111	-118	-137
f = 30 GHz	-109	-107	-114	-134
f = 40 GHz	-107	-105	-112	-132
f = 44 GHz	-106	-104	-111	-130

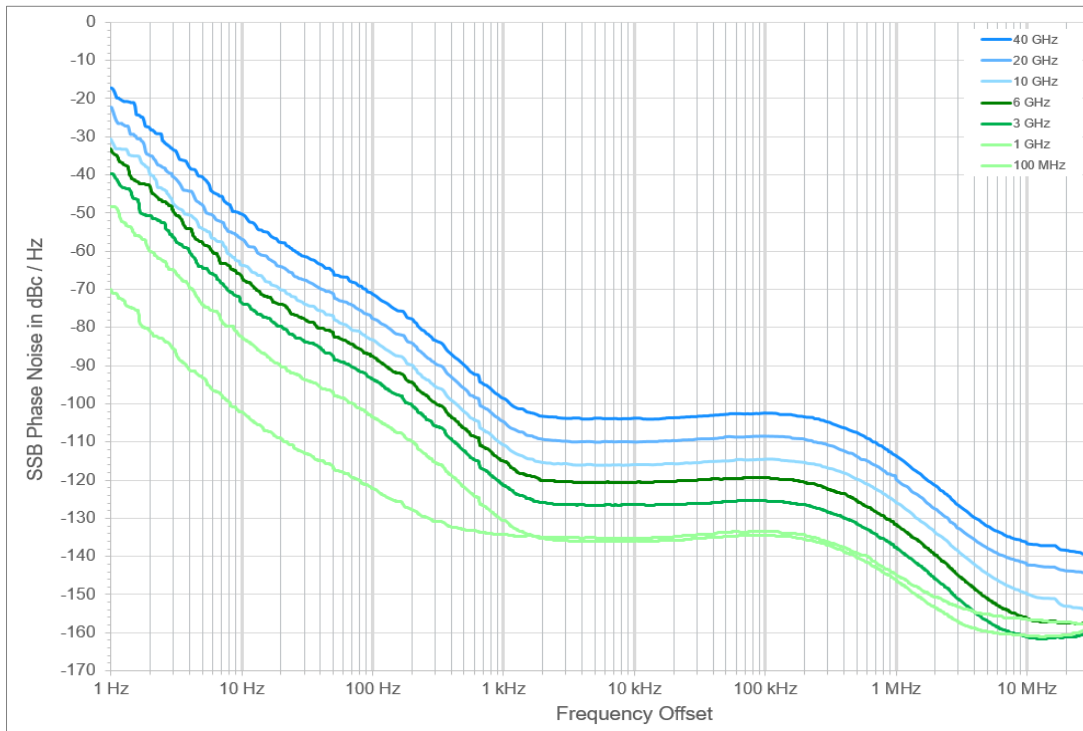

Measured SSB phase noise performance, standard instrument, CW mode

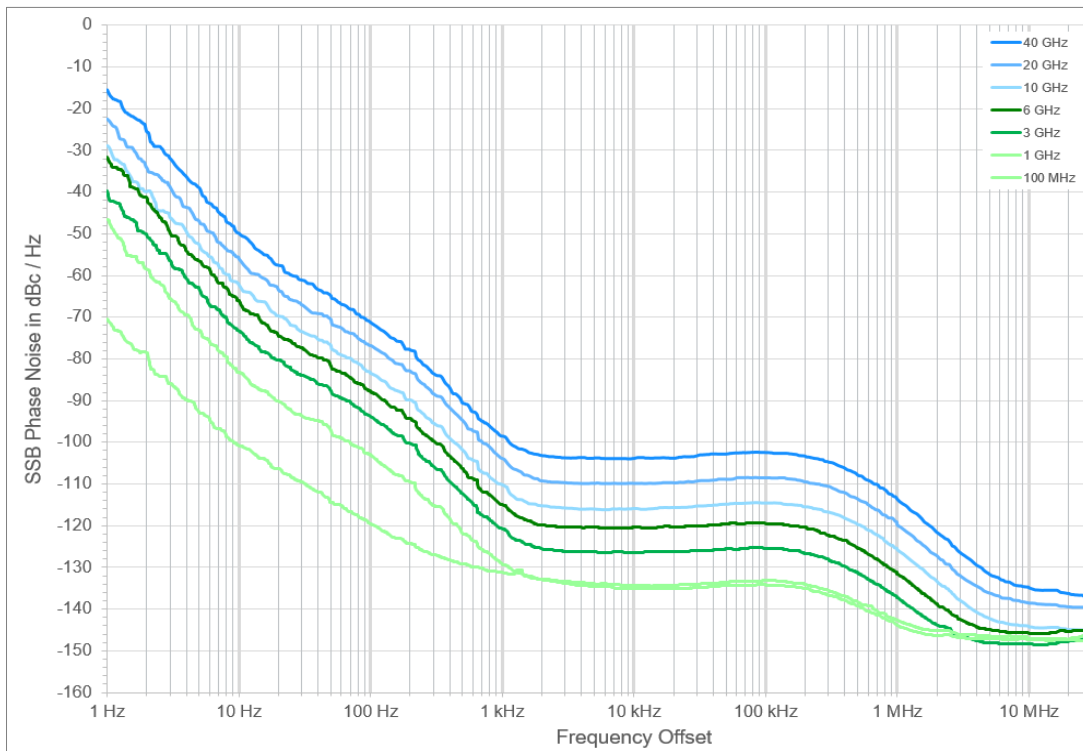

Measured SSB phase noise performance, standard instrument, I/Q mode

## List mode

Frequency and level values can be stored in a list and set in an extremely short amount of time, triggered by an internal timer or an external trigger connector. There are two run modes available:

- Learned: faster (see frequency and level data), limited number of steps, cannot be combined with I/Q optimization mode "high quality"
- Live: works only for dwell times above 2 ms

Run modes		learned, live
Operating modes	internal trigger, infinite	automatic
	internal trigger, one sweep per trigger event	single
	internal trigger, one step per trigger event	step
	external trigger, one sweep per trigger event	extern single
	external trigger, one step per trigger event	extern step
Maximum number of steps (learned mode)		10000
Dwell time	can be set individually for each step	0.5 ms to 100 s
Dwell time resolution		0.1 ms
Setting time	after external trigger	see frequency and level data



## Phase coherence (R&S®SMM-B90 option)

It provides phase-coherent RF outputs for two or more instruments.

LO coupling modes	This mode corresponds to internal LO operation. The LO OUT connector can provide the internal LO oscillator signal to enable phase-coherent coupling with other instruments.	internal
	This mode corresponds to external LO operation, provided at the LO IN connector. The LO OUT connector can provide the external LO oscillator signal to enable phase-coherent coupling with additional instruments.	external
REF/LO OUT states	The active LO signal can be routed to the LO OUT connector (in order to couple two or more instruments).	on/off
<b>Input of phase coherence signal</b>		
Connector type	LO IN on rear panel	SMA female
Input impedance		50 Ω (nom.)
Input level range of external LO signal		7 dBm to 13 dBm
Frequency range of external LO signal	for RF setting 200 MHz < f ≤ 6.5 GHz	1.0 · f
	for RF setting 6.5 GHz < f ≤ 13 GHz	0.5 · f
	for RF setting 13 GHz < f ≤ 26 GHz	0.25 · f
	for RF setting 26 GHz < f ≤ 44 GHz	0.125 · f
<b>Output of phase coherence signal</b>		
Connector type	LO OUT on rear panel	SMA female
Output impedance		50 Ω (nom.)
Output level range of internal LO signal		7 dBm to 13 dBm
Frequency range of internal LO signal	for RF setting 200 MHz < f ≤ 6.5 GHz	1.0 · f
	for RF setting 6.5 GHz < f ≤ 13 GHz	0.5 · f
	for RF setting 13 GHz < f ≤ 26 GHz	0.25 · f
	for RF setting 26 GHz < f ≤ 44 GHz	0.125 · f

## Simultaneous modulation

	Amplitude modulation	Frequency modulation	Phase modulation	Pulse modulation	I/Q modulation
Amplitude modulation	–	●	●	○	–
Frequency modulation	●		–	●	●
Phase modulation	●	–		●	●
Pulse modulation	○	●	●		○
I/Q modulation	–	●	●	○	

- = compatible, – = incompatible
- = compatible with limitations (ALC mode = off)

# Analog modulation

## Amplitude modulation (R&S®SMM-K720 option)

Modulation source		internal, external
External coupling		AC, DC
Modulation depth	modulation is clipped at high levels when maximum PEP is reached	0 % to 100 %
Resolution of setting		0.1 %
AM depth (m) error	$f \leq 20$ GHz	
	$f_{\text{mod}} = 1$ kHz and $m < 80$ %	< (1 % of reading + 1 %)
	20 GHz < $f$	
	$f_{\text{mod}} = 1$ kHz and $m < 80$ %	< (2 % of reading + 1 %)
AM distortion	$f \leq 3$ GHz, $f_{\text{mod}} = 1$ kHz	
	$m = 30$ %	< 0.8 %
	$m = 80$ %	< 1.4 %
	3 GHz < $f \leq 20$ GHz, $f_{\text{mod}} = 1$ kHz	
	$m = 30$ %	< 1 %
	$m = 80$ %	< 1.6 %
	20 GHz < $f$ , $f_{\text{mod}} = 1$ kHz	
	$m = 30$ %	< 1.5 %
	$m = 80$ %	< 2.4 %
Modulation frequency range		DC, 20 Hz to 500 kHz
Modulation frequency response	AC mode, 20 Hz to 500 kHz	< 1 dB
Incidental PM at AM	$m = 30$ %, $f_{\text{mod}} = 1$ kHz, peak value	< 0.1 rad

## Frequency modulation (R&S®SMM-K720 option)

FM multiplier (N) for different frequency ranges	100 kHz $\leq f \leq$ 200 MHz	N = 1
	200 MHz < $f \leq$ 375 MHz	N = 1/4
	375 MHz < $f \leq$ 750 MHz	N = 1/2
	750 MHz < $f \leq$ 1500 MHz	N = 1
	1.5 GHz < $f \leq$ 3 GHz	N = 2
	3 GHz < $f \leq$ 6 GHz	N = 4
	6 GHz < $f \leq$ 12 GHz	N = 8
		12 GHz < $f \leq$ 24 GHz
	24 GHz < $f \leq$ 44 GHz	N = 32
Modulation source		internal, external, internal + external
External coupling		AC, DC
FM modes		normal, low noise
Maximum deviation	FM mode: normal	N · 10 MHz
	FM mode: low noise	N · 100 kHz
Resolution of setting		< 200 ppm, min. N · 0.1 Hz
FM deviation error	$f_{\text{mod}} = 10$ kHz, deviation $\leq$ half of maximum deviation or 10 MHz, whichever is lower	
	internal	< (1.5 % of reading + 20 Hz)
	external	< (2.0 % of reading + 20 Hz)
FM distortion	$f_{\text{mod}} = 10$ kHz, deviation = N · 1 MHz	< 0.1 %
Modulation frequency response	FM mode: normal (DC/AC coupling), 50 $\Omega$ input impedance	
	DC, 10 Hz to 100 kHz	< 0.5 dB
	DC, 10 Hz to 10 MHz, $f \leq 3$ GHz;	< 3 dB
	DC, 10 Hz to 5 MHz, $f > 3$ GHz	
	FM mode: low noise (DC/AC coupling), 50 $\Omega$ input impedance	
	DC, 10 Hz to 100 kHz	< 3 dB
Synchronous AM with FM	40 kHz deviation, $f_{\text{mod}} = 1$ kHz	
	5 MHz < $f \leq 3$ GHz	< 0.1 %
	3 GHz < $f \leq 6$ GHz	< 0.2 %
	6 GHz < $f \leq 44$ GHz	< 0.2 %
Carrier frequency offset at FM		< 0.2 % of set deviation

## Phase modulation (R&S®SMM-K720 option)

PM multiplier (N) for different frequency ranges	100 kHz ≤ f ≤ 200 MHz	N = 1
	200 MHz < f ≤ 375 MHz	N = 1/4
	375 MHz < f ≤ 750 MHz	N = 1/2
	750 MHz < f ≤ 1500 MHz	N = 1
	1.5 GHz < f ≤ 3 GHz	N = 2
	3 GHz < f ≤ 6 GHz	N = 4
	6 GHz < f ≤ 12 GHz	N = 8
	12 GHz < f ≤ 24 GHz	N = 16
	24 GHz < f ≤ 44 GHz	N = 32
Modulation source		internal, external, internal + external
External coupling		AC, DC
PM modes		high deviation, high bandwidth, low noise
Maximum deviation	PM mode: high deviation, $f_{\text{mod}} \leq N \cdot 10 \text{ MHz} / \text{deviation}$	N · 20.0 rad
	PM mode: high bandwidth	N · 1.0 rad
	PM mode: low noise	N · 0.25 rad
Resolution of setting	PM mode: high deviation	< 200 ppm, min. N · 20 μrad
	PM mode: high bandwidth	< 0.1 %, min. N · 20 μrad
	PM mode: low noise	< 200 ppm, min. N · 20 μrad
PM deviation error	$f_{\text{mod}} = 10 \text{ kHz}$ , deviation ≤ half of maximum deviation	
	internal	< (1.5 % of reading + 0.01 rad)
	external	< (2.0 % of reading + 0.01 rad)
Modulation frequency response	DC/AC coupling, 50 Ω input impedance	
	PM mode: high deviation	
	deviation ≤ N · 5 rad, DC, 10 Hz to 500 kHz	< 1 dB
	deviation > N · 5 rad, DC, 10 Hz to 10 kHz	
	PM mode: high bandwidth	
	DC, 10 Hz to 10 MHz, f ≤ 3 GHz	< 3 dB
	DC, 10 Hz to 5 MHz, f > 3 GHz	
PM mode: low noise		
DC, 10 Hz to 100 kHz	< 3 dB	

## Pulse modulation (R&S®SMM-K22 option)

Modulation source		external, internal
On/off ratio		> 80 dB
Rise/fall time	10 %/90 % of RF amplitude	
	with R&S®SMM-B1006 frequency option	
	transition type = fast	< 10 ns
	transition type = smoothed	< 200 ns
	with R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020 frequency options	
	transition type = fast	< 10 ns
	transition type = smoothed	< 200 ns
	only available for: f ≤ 5 GHz, CW; f ≤ 3.5 GHz, I/Q modulation or AM modulation	
	with R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	transition type = fast	< 15 ns
transition type = smoothed	< 200 ns	
only available for: f ≤ 5 GHz, CW; f ≤ 3.5 GHz, I/Q modulation or AM modulation		
Minimum pulse width	50 %/50 % of RF amplitude, transition type = fast	
	with R&S®SMM-B1006, R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044 frequency options	20 ns
	with R&S®SMM-B1044N frequency option	
	f ≤ 19.5 GHz	20 ns
	f > 19.5 GHz	30 ns
	with R&S®SMM-B1044O frequency option	
	f ≤ 31.8 GHz	20 ns
	31.8 GHz < f ≤ 37 GHz	30 ns
> 37 GHz	20 ns	
Pulse repetition frequency		0 Hz to 10 MHz
Video feedthrough	with R&S®SMM-B1006, R&S®SMM-B1007 frequency options	
	level < 10 dBm	< 10 % of RF < 200 mV (V <sub>pp</sub> )
	with R&S®SMM-B1012 frequency option	
	f ≤ 5 GHz: level < 5 dBm	< 10 % of RF < 200 mV (V <sub>pp</sub> )
	f > 5 GHz: level < 10 dBm	< 10 % of RF < 20 mV (V <sub>pp</sub> )
	R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	f ≤ 5 GHz: level < 5 dBm	< 10 % of RF < 200 mV (V <sub>pp</sub> )
	f > 5 GHz: level < 10 dBm	< 10 % of RF < 2 mV (V <sub>pp</sub> )
		< 10 %
Pulse overshoot		< 10 %

## Input for external modulation signals

<b>Modulation inputs: EXT 1, EXT 2 for AM/FM/PM</b>		
Connector type	EXT 1, EXT 2 on rear panel	BNC female
Input impedance	selectable	100 k $\Omega$ or 50 $\Omega$ (nom.)
Coupling		AC, DC
Input sensitivity	peak value for set modulation depth or deviation	1 V (nom.)
Bandwidth	analog input bandwidth	0 Hz to 10 MHz
Input damage voltage		$\pm$ 10 V
<b>Modulation input for pulse modulation</b>		
Input		selectable from USER 1, 2, 3 on front panel or USER 4, 5, 6 on rear panel
Connector type	USER 1, 2, 3 on front panel, USER 4, 5, 6 on rear panel	BNC female
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
Threshold voltage		0 V to 2.0 V (nom.)
Input damage voltage		3.3 V (nom.)
Input polarity	selectable	normal, inverse

# Modulation sources for analog modulation

## Internal modulation generator

Shape		sinusoidal
Frequency range		0.1 Hz to 1 MHz
Resolution of setting		0.1 Hz
Frequency uncertainty		< 0.001 Hz + relative deviation of reference frequency

## Multifunction generator (R&S®SMM-K24 option)

The multifunction generator (R&S®SMM-K24 option) consists of three function generators that can be set independently. Two of the three signal sources can be added with different weighting. The total voltage is limited by the maximum output voltage.

Sources	LF generator 1 and 2	sine wave, pulse, triangle, trapezoid
	noise generator	noise amplitude distribution: Gaussian, equal
Frequency range	sine wave	0.1 Hz to 10 MHz
	pulse, triangle, trapezoid	0.1 Hz to 1 MHz (displayed value)
	noise bandwidth	100 kHz to 10 MHz
Resolution of setting	sine wave	0.1 Hz
	pulse, triangle, trapezoid	10 ns
	noise bandwidth	100 kHz
Frequency uncertainty		< 0.001 Hz + relative deviation of reference frequency

## LF output

Monitoring of resulting modulation signal		for AM, FM, PM
Source		LF generator 1, LF generator 2, external 1, external 2, noise generator
Output voltage	$V_p$ at LF connector, open circuit voltage EMF	
Setting range		20 mV to 1 V
Setting resolution		1 mV
Setting accuracy	at 1 kHz	< (1 % of reading + 1 mV)
Output impedance		50 $\Omega$
DC offset		-0.2 V to +2.5 V
Frequency response	sine wave, up to 1 MHz	0.05 dB (meas.)
	sine wave, up to 10 MHz	0.1 dB (meas.)
Distortion	f < 100 kHz, at $R_L > 50 \Omega$ , level ( $V_{EMF}$ ): 1 V	< 0.1 %

## High-performance pulse generator (R&S®SMM-K23 option)

Pulse modes		single pulse, double pulse
Trigger modes	free run, internally triggered	auto
		external trigger
		external gate
Active trigger edge		positive or negative
Pulse period		
Setting range		20 ns to 100 s
Setting resolution		3.333 ns
Pulse width		
Setting range	pulse widths of double pulses are independently settable	3.333 ns to 100 s
Setting resolution		3.333 ns
Pulse delay		
Setting range		0 ns to 100 s
Setting resolution		3.333 ns
Double-pulse delay		
Setting range		20 ns to 1 s
Setting resolution		3.333 ns
Uncertainty for pulse timing	pulse timing generated digitally; ensured by design	relative deviation of reference frequency
External trigger		
Delay	trigger to RF output	50 ns (meas.)
Jitter		< 10 ns (meas.)
PULSE/VIDEO/SYNC output		LVTTL signal ( $R_L \geq 50 \Omega$ )

# I/Q modulation

## I/Q modulation performance


Operating modes		external wideband I/Q
		internal baseband I/Q
RF modulation bandwidth	with external wideband I/Q inputs, I/Q wideband on; with R&S®SMM-B1006, R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044 options	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
	300 MHz < f ≤ 2.5 GHz	±40 % of carrier frequency
	f > 2.5 GHz	±1 GHz
	with external wideband I/Q inputs, I/Q wideband on; with R&S®SMM-B1044N option	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
	300 MHz < f ≤ 2.5 GHz	±40 % of carrier frequency
	2.5 GHz < f ≤ 20 GHz	±1 GHz
	f > 20 GHz	±275 MHz
	with external wideband I/Q inputs, I/Q wideband on; with R&S®SMM-B1007, R&S®SMM-B1012 options	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
	300 MHz < f ≤ 1.25 GHz	±40 % of carrier frequency
	f > 1.25 GHz	±500 MHz
	with external wideband I/Q inputs, I/Q wideband off	
	f ≤ 1000 MHz	±10 % of carrier frequency
	f > 1000 MHz	±100 MHz
	with internal baseband I/Q, I/Q wideband on; with R&S®SMM-B1006, R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044 options	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
	300 MHz < f ≤ 1.25 GHz	±40 % of carrier frequency
	f > 1.25 GHz	±500 MHz
	with internal baseband I/Q, I/Q wideband on; with R&S®SMM-B1044N option	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
	300 MHz < f ≤ 1.25 GHz	±40 % of carrier frequency
	1.25 GHz < f ≤ 20 GHz	±500 MHz
	f > 20 GHz	±275 MHz
	with internal baseband I/Q, I/Q wideband on; with R&S®SMM-B1044O option <sup>3</sup>	
	1 MHz ≤ f ≤ 300 MHz	±32 % of carrier frequency
300 MHz < f ≤ 1.25 GHz	±40 % of carrier frequency	
1.25 GHz < f ≤ 31.75 GHz	±500 MHz	
31.75 GHz < f ≤ 37.05 GHz	±225 MHz	
f > 37.05 GHz	±500 MHz	
RF frequency response in specified RF modulation bandwidth	with external wideband I/Q inputs	
	I/Q wideband on	< 9 dB, < 6 dB (meas.)
	I/Q wideband off	< 5 dB, < 3 dB (meas.)
	with internal baseband I/Q, I/Q wideband on, optimization mode: high quality	< 1.0 dB, < 0.4 dB (meas.)
Carrier leakage <sup>4</sup>	mode: internal baseband I/Q, referenced to full-scale input	
	f < 20 GHz	< -55 dBc
	f > 20 GHz	< -40 dBc
Suppression of image sideband for entire instrument in modulation bandwidth <sup>4</sup>	with internal baseband I/Q, optimization mode: high quality	> 40 dB, 50 dB (meas.)

<sup>3</sup> Bandwidth limitation for R&S®SMM-B1044O option comes with an additional sample rate limitation.  
Sample rate is limited to 550 Msample in the range 31.75 GHz < f < 37.05 GHz.

<sup>4</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.



Two-tone IMD (2 carriers)	PEP = 0 dBm, up to 80 MHz carrier spacing	
	$f \leq 3$ GHz	< -50 dBc (typ.)
	$3 \text{ GHz} < f \leq 10$ GHz	< -45 dBc (typ.)
	$10 \text{ GHz} < f \leq 20$ GHz	< -40 dBc (typ.)
	$20 \text{ GHz} < f \leq 30$ GHz	< -38 dBc (typ.)
	$30 \text{ GHz} < f \leq 44$ GHz	< -32 dBc (typ.)
I/Q impairments (analog)	These impairments are set within the analog I/Q modulator section. They can be used in external wideband I/Q mode and internal baseband I/Q mode. They cannot be applied to the analog or digital I/Q outputs.	
	I offset, Q offset	
	setting range	-10 % to +10 %
	setting resolution	0.01 %
	gain imbalance	
	setting range	-1.0 dB to +1.0 dB
	setting resolution	0.01 dB
	quadrature offset	
	setting range	-10° to +10°
	setting resolution	0.01°

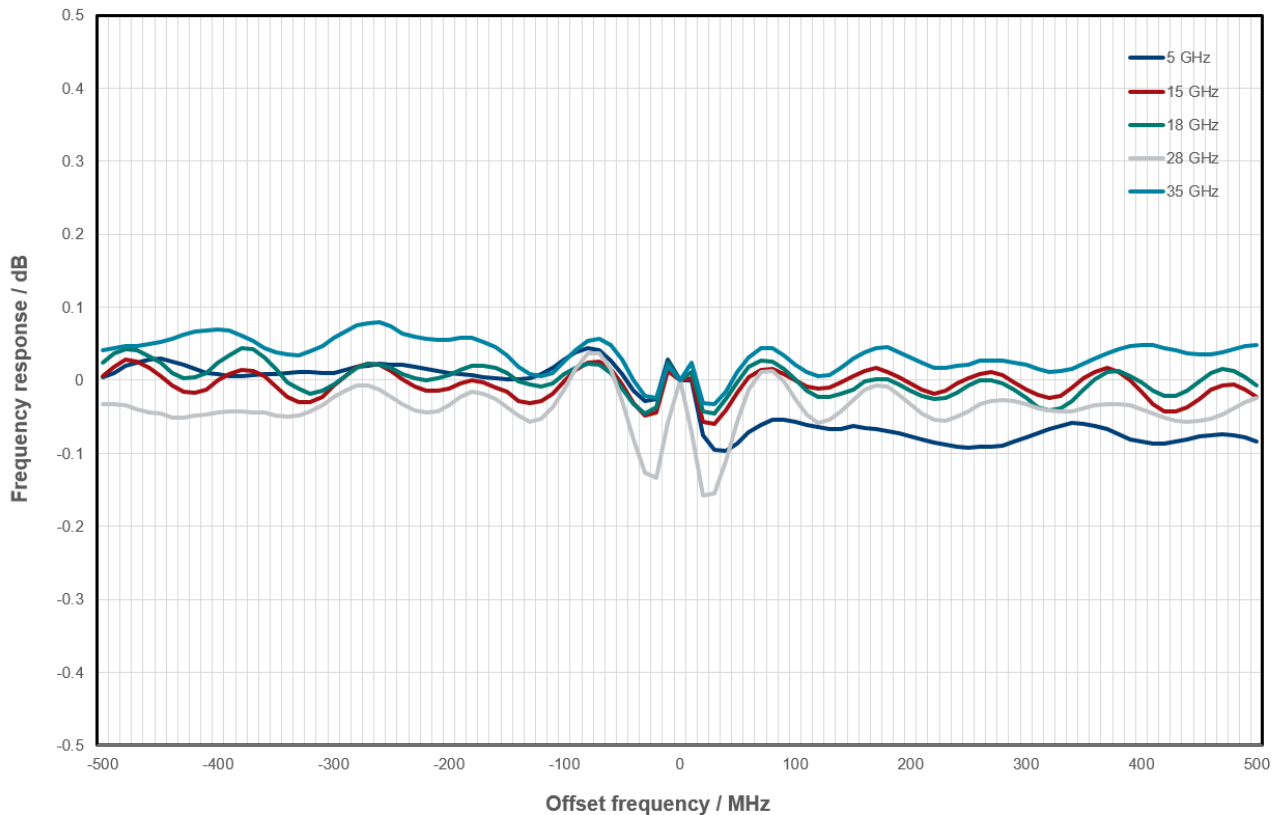

Measured RF modulation frequency response (magnitude) with internal baseband I/Q

## Analog I/Q inputs

Analog I/Q input signals are directly applied to the analog I/Q modulation circuit and are not routed through the baseband section of the R&S®SMM100A.

Analog I/Q inputs are not available if the R&S®SMM-B1044O option is installed.

Input mode		single-ended
Connector types	I, Q on front panel	BNC female
Input impedance		50 Ω (nom.)
VSWR	with R&S®SMM-B1006, R&S®SMM-B1007, R&S®SMM-B1012, R&S®SMM-B1020 frequency options	
	up to 200 MHz	< 1.2 (typ.)
	200 MHz to 500 MHz	< 1.35 (typ.)
	500 MHz to 1 GHz	< 1.45 (typ.)
	with R&S®SMM-B1031, R&S®SMM-B1044 frequency options	
	up to 200 MHz, f ≤ 20 GHz	< 1.2 (typ.)
	up to 200 MHz, f > 20 GHz	< 1.35 (typ.)
	200 MHz to 500 MHz	< 1.35 (typ.)
	500 MHz to 1 GHz	< 1.5 (typ.)
	with R&S®SMM-B1044N frequency option	
	up to 200 MHz, f ≤ 20 GHz	< 1.2 (typ.)
	200 MHz to 500 MHz, f ≤ 20 GHz	< 1.35 (typ.)
	500 MHz to 1 GHz, f ≤ 20 GHz	< 1.5 (typ.)
	up to 275 MHz, f > 20 GHz	< 1.35 (typ.)
Nominal input voltage for full-scale input		$\sqrt{V_i^2 + V_q^2} = 0.5 \text{ V}$
Damage voltage		±2 V

# Baseband characteristics

## Internal baseband characteristics

The internal baseband provides I/Q paths that can be routed to the installed RF paths or to the analog I/Q outputs.

<b>D/A converter</b>		
Data rate		1200 MHz
Resolution		14 bit
Sample rate		4800 MHz (internal interpolation · 4)
<b>Aliasing filter</b>	with amplitude, group delay and S <sub>i</sub> correction	
Bandwidth, rolloff to -0.1 dB		1000 MHz
SFDR overall		> 55 dB
<b>I/Q impairments (digital baseband)</b>	These impairments are set in the digital baseband section of the R&S®SMM100A. They act on the I/Q signal sent to the I/Q modulator/RF section as well as on the I/Q signals at the analog or digital I/Q outputs (of the respective path).	
<b>Carrier leakage</b>		
Setting range		-10 % to +10 %
Setting resolution		0.01 %
<b>I ≠ Q (imbalance)</b>		
Setting range		-1 dB to +1 dB
Setting resolution		0.01 dB
<b>Quadrature offset</b>		
Setting range		-10° to +10°
Setting resolution		0.01°

## Wideband analog I/Q outputs

Output impedance		50 Ω
Output voltage	EMF (output voltage depends on set modulation signal)	1 V (V <sub>p</sub> )
Offset	EMF	< 1 mV
Frequency response <sup>5</sup>	at R <sub>L</sub> = 50 Ω	
Magnitude	up to 100 MHz	0.1 dB (meas.)
	up to 500 MHz	0.2 dB (meas.)
I/Q balance <sup>6</sup>	at R <sub>L</sub> = 50 Ω	
Magnitude	up to 100 MHz	0.1 dB (meas.)
	up to 500 MHz	0.1 dB (meas.)
Spectral purity	at R <sub>L</sub> = 50 Ω	
SFDR (sine wave)	100 MHz	> 60 dB
	up to 500 MHz	55 dB (meas.)
Wideband noise	10 MHz sine wave at 1 MHz offset	-155 dBc (typ.)

<sup>5</sup> "Optimize internal I/Q impairments for RF output" switched off.

<sup>6</sup> Value applies after 1 hour warm-up time and recalibration for 4 hours of operation and temperature variations of less than +5 °C.

## Wideband differential analog I/Q outputs (R&S®SMM-K17 option)

Output impedance		
Single-ended		50 Ω
Differential		100 Ω
Output voltage ( $V_{out}$ )		
Single-ended	EMF	0.02 V to 1 V ( $V_p$ )
Resolution		0.1 mV
Differential	EMF	0.04 V to 2 V ( $V_{pp}$ )
Resolution		0.1 mV
Bias voltage (single-ended and differential)		
	EMF	-0.2 V to +2.5 V <sup>7</sup>
Resolution		0.1 mV
Uncertainty		1 % + 2 mV
Offset voltage		
Differential	EMF	$(-2 V + V_{out})$ to $(+2 V - V_{out})$
	EMF, RF envelope: on (R&S®SMM-K540 required)	-2 V to +2 V
Resolution		0.1 mV
Uncertainty		1 % + 1 mV
Differential signal balance		
Magnitude	at $R_L = 50 \Omega$ , output voltage > 0.5 V ( $V_p$ )	
	up to 100 MHz	0.1 dB (meas.)
	up to 500 MHz	0.15 dB (meas.)
Frequency response <sup>8</sup>		
Magnitude	at $R_L = 50 \Omega$ , output voltage > 0.5 V ( $V_p$ )	
	up to 100 MHz	0.1 dB (meas.)
	up to 500 MHz	0.2 dB (meas.)
Wideband noise	10 MHz sine wave at 1 MHz offset	-160 dBc (typ.)

<sup>7</sup> The magnitude of the sum of output voltage and bias voltage must not exceed 4 V.

<sup>8</sup> "Optimize internal I/Q impairments for RF output" switched off.

## Digital baseband inputs for wideband baseband

Depending on the installed software and hardware options, the R&S®SMM100A is able to receive digital baseband signals. The digital I/Q input can be used for the lossless connection of the R&S®SMM100A to the digital I/Q output of other Rohde & Schwarz instruments.

### Minimum required options for digital I/Q inputs

Interface standard	HS DIG I/Q	1 x R&S®SMM-B9
--------------------	------------	----------------

### Input parameters

HS DIG I/Q interface		
Input level	peak level	
Setting range		-60 dB to +3 dB, referenced to full scale
Setting resolution		0.01 dB
Crest factor		
Setting range		0 dB to +30 dB
Setting resolution		0.01 dB
Adjust level function		automatically determines peak level and crest factor of input signal
Standard		HS DIG I/Q, in line with R&S®Digital I/Q Interface 40G PAD-R <sup>9</sup> (DIG I/Q 40G), I/Q data and control signals
Level		CML
Connector		QSFP+/QSFP 28
I/Q sample rate		
Source	The sample rate will be used based on information provided by the transmitting device.	HS digital I/Q In
Sample rate	maximum sample rate depends on connected transmitting device and system configuration mode	
	40G	up to 1.05 GHz
	50G	up to 1.20 GHz
Resolution		0.001 Hz
Frequency uncertainty		$< (1 \cdot 10^{-12} + \text{relative deviation of reference frequency}) \cdot \text{sample rate (nom.)}$
I/Q data		
Resolution		16 bit
Logic format		two's complement
Bandwidth (RF)		$0.833 \cdot \text{sample rate}$
Control signals	markers	2

<sup>9</sup> R&S®Digital I/Q Interface 40G PAD-R is a Rohde & Schwarz internal company guideline for the transmission of digital I/Q data. It is supported by a wide range of signal generators, signal analyzers and radio communication testers.

## Baseband generator with ARB (R&S®SMM-B9 option)

The I/Q signals can be assigned a frequency offset.

Waveform length	standard	1 sample to 64 Msample, in one-sample steps
	with R&S®SMM-K511 option	1 sample to 512 Msample, in one-sample steps
	with R&S®SMM-K511 and R&S®SMM-K512 options	1 sample to 1 Gsample, in one-sample steps
	with R&S®SMM-K511, R&S®SMM-K512 and R&S®SMM-K513 options	1 sample to 2 Gsample, in one-sample steps
Supported file formats		.wv, .mat, .csv, .iq.tar
Nonvolatile memory		solid-state disk
Sample resolution	equivalent to D/A converter	14 bit
Sample rate		400 Hz to 150 MHz
	with R&S®SMM-K523 option	400 Hz to 300 MHz
	with R&S®SMM-K524 option	400 Hz to 600 MHz
	with R&S®SMM-K525 option	400 Hz to 1200 MHz
Sample frequency error	internal clock	$< (1 \cdot 10^{-12} + \text{relative deviation of reference frequency}) \cdot \text{sample rate (nom.)}$
Sample clock source		internal
Bandwidth (RF)	at maximum sample rate, rolloff to $-0.1$ dB	120 MHz
	at reduced sample rate, rolloff to $-0.1$ dB	$0.8 \cdot \text{sample rate}$
Bandwidth (RF) with R&S®SMM-K523 option	at maximum sample rate, rolloff to $-0.1$ dB	240 MHz
	at reduced sample rate, rolloff to $-0.1$ dB	$0.8 \cdot \text{sample rate}$
Bandwidth (RF) with R&S®SMM-K524 option	at maximum sample rate, rolloff to $-0.1$ dB	500 MHz
	at reduced sample rate, rolloff to $-0.1$ dB	$0.833 \cdot \text{sample rate}$
Bandwidth (RF) with R&S®SMM-K525 option	at maximum sample rate, rolloff to $-0.1$ dB	1000 MHz
	at reduced sample rate, rolloff to $-0.1$ dB	$0.833 \cdot \text{sample rate}$
<b>Frequency offset</b>	Using the frequency offset, the center frequency of the wanted baseband signal can be shifted. The restrictions caused by the modulation bandwidth still apply.	
Frequency offset setting range	standard	$-60$ MHz to $+60$ MHz
	with R&S®SMM-K523 option	$-120$ MHz to $+120$ MHz
	with R&S®SMM-K524 option	$-250$ MHz to $+250$ MHz
	with R&S®SMM-K525 option	$-500$ MHz to $+500$ MHz
Frequency offset setting resolution		0.01 Hz
Frequency offset error		$< 9 \cdot 10^{-6}$ Hz + relative deviation of reference frequency $\cdot$ frequency offset (nom.)
<b>Triggering</b>	A trigger event restarts I/Q generation. The I/Q signal is then synchronous with the trigger (with a specific timing jitter).	
Trigger source	event triggered via GUI or remote command	internal
	event triggered by other baseband generator	internal (baseband A/B)
	event triggered by external trigger signal	external
Trigger modes	The signal is generated continuously.	auto
	The signal is generated continuously. A trigger event causes a restart.	retrig
	The signal is started only when a trigger event occurs. Subsequent trigger events are ignored.	armed auto
	The signal is started only when a trigger event occurs. Every subsequent trigger event causes a restart.	armed retrig
	The signal is started only when a trigger event occurs. The signal is generated once.	single

External trigger input		selectable from USER 1, 2, 3 on front panel
Connector type	USER 1, 2, 3 on front panel	BNC female
Input level		0 V to 3 V (nom.)
Threshold	USER 1, 2, 3	settable between 0.1 V and 2.0 V
Input damage voltage		$\leq -0.5$ V, $\geq 3.8$ V
Input impedance	selectable	1 k $\Omega$ or 50 $\Omega$ (nom.)
Trigger jitter		$\pm 1.67$ ns
External trigger delay		
Setting range		0 sample to $2.147 \cdot 10^9$ sample
Setting resolution		3.3 ns
External trigger inhibit		
Setting range		0 sample to (21.47s · sample rate) sample
Setting resolution		1 sample
External trigger pulse width		> 7.5 ns
<b>Marker signals</b>		
Number of marker signals		3
Operating modes		unchanged, restart, pulse, pattern, ratio
Marker outputs		selectable from USER 1, 2, 3 on front panel
Connector type	USER 1, 2, 3 on front panel	BNC female
Level		LVTTTL
Marker delay		
Setting range		0 sample to (waveform length – 1) sample
Setting resolution		1 sample
Marker duration		
Minimum value	sample rate $\leq$ 300 Msample/s	1 sample
	300 Msample/s < sample rate $\leq$ 600 Msample/s	2 sample
	600 Msample/s < sample rate $\leq$ 1200 Msample/s	4 sample
<b>Multisegment waveform mode</b>		
Number of segments		1 to 1024
Changeover modes		GUI, remote control
Extended trigger modes		same segment, next segment, next segment seamless, sequencer
Seamless changeover		output up to end of current segment, followed by changeover to next segment
Sequencer play list length		max. 1024
Sequencer segment repetitions		max. 1048575
<b>Multicarrier waveform mode</b>		
Number of carriers		max. 512
Total RF bandwidth		max. 120 MHz
	with R&S®SMM-K523 option	max. 240 MHz
	with R&S®SMM-K524 option	max. 500 MHz
	with R&S®SMM-K525 option	max. 1000 MHz
Carrier spacing		
Setting range		depends on number of carriers and signal RF bandwidth
Setting resolution		0.01 Hz
Crest factor modes		maximize, minimize, off
Signal period modes		longest file, shortest file, user (max. 1 s)
Single carrier gain		
Setting range		–80 dB to 0 dB
Setting resolution		0.01 dB
Single carrier start phase		
Setting range		0° to 360°
Setting resolution		0.01°
Single carrier delay		
Setting range		0 s to 1 s
Setting resolution		1 ns

## I/Q baseband generator: real-time operation (custom digital modulation) (R&S®SMM-K520 option)

Prerequisite: R&S®SMM-B9 must be installed. Their I/Q signals can be assigned a frequency offset.

See Digital Standards for Signal Generators specifications (PD 5213.9434.22).

## Baseband enhancements

### Additive white Gaussian noise (AWGN) (R&S®SMM-K62 option)

AWGN can be generated with the R&S®SMM-K62 option.

Addition of an AWGN signal of settable bandwidth and settable C/N ratio or  $E_b/N_0$  to a wanted signal. If the noise generator is used, a frequency offset cannot be added to the wanted signal.

Noise		
Distribution density		Gaussian, statistical, separate for I and Q
Crest factor		> 15 dB
Periodicity		> $3 \cdot 10^{10}$ s
C/N, $E_b/N_0$		
Setting range	depends on the set RF level; The PEP of the sum signal (wanted signal + noise) must not exceed the maximum possible PEP of the respective RF path.	-50 dB to +45 dB
Setting resolution		0.01 dB
Uncertainty	for system bandwidth = symbol rate, symbol rate < 4 MHz, -24 dB < C/N < 30 dB and crest factor < 12 dB	< 0.1 dB
System bandwidth		
Setting range	bandwidth for determining noise power	1 kHz to 120 MHz
	with R&S®SMM-K523 option	1 kHz to 240 MHz
	with R&S®SMM-K524 option	1 kHz to 500 MHz
	with R&S®SMM-K525 option	1 kHz to 1000 MHz
Setting resolution		100 Hz

### Envelope tracking (R&S®SMM-K540 option)

With this option, the analog I/Q outputs can be used to generate an analog signal corresponding to the envelope of the I/Q signal to test envelope tracking modulators.

For R&S®SMM-K540 option to be installed, the R&S®SMM-K17 option must be installed, and the instrument must be equipped with an R&S®SMM-B9 baseband generator option.

General		
Envelope voltage adaptation		auto normalized, auto power, manual
Output type		single-ended, differential
Bias voltage	see section Differential analog I/Q outputs or Wideband differential analog I/Q outputs	
Offset voltage	see section Differential analog I/Q outputs or Wideband differential analog I/Q outputs	
Envelope to RF delay		
Setting range		-1 $\mu$ s to +1 $\mu$ s
Setting resolution		1 ps
Shaping		off, linear, from table, polynomial, detrouthing
Envelope voltage adaptation modes: auto normalized and auto power		
Power amplifier input power $P_{in}$		
Setting range		-145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Power amplifier supply voltage $V_{CC}$	$V_{CC} = \text{envelope voltage} \cdot \text{DC modulator gain} + V_{CC, \text{Offset}}$	
DC modulator gain		-20.00 dB to +20.00 dB
Power amplifier offset voltage $V_{CC, \text{Offset}}$		0 V to 30 V
Envelope voltage adaptation mode: manual		
Pregain		
Setting range		-20.00 dB to 0.00 dB
Setting resolution		0.01 dB



Postgain		
Setting range		–3.00 dB to +20.00 dB
Setting resolution		0.01 dB
Clipping level	upper and lower limit can be set separately	0 % to 100 %
Maximum output voltage	see “Output voltage” in section “Differential analog I/Q outputs”	

## AM/AM, AM/PM predistortion (R&S®SMM-K541 option)

An R&S®SMM-K541 option to be installed requires an R&S®SMM-B9 baseband generator option.

State		on/off
Maximum input power (PEP <sub>in, max</sub> )		
Setting range		–145.00 dB to +30.00 dB
Setting resolution		0.01 dB
Shaping		polynomial, from table

## User-defined frequency response correction (R&S®SMM-K544 option)

State		on/off
Scattering parameters		
File format		*.s<n>p (e.g. *.s2p)
Maximum number of points		16384
Number of cascable datasets		up to 10
Additional frequency response		
File format		*.fres, *.ucor
Number of files		up to 5
Absolute level correction at center frequency	based on S-parameter data	on/off
Minimum compensation bandwidth		100 MHz
Total compensation bandwidth	standard	max. 120 MHz
	with R&S®SMM-K523 option	max. 240 MHz
	with R&S®SMM-K524 option	max. 500 MHz
	with R&S®SMM-K525 option	max. 1000 MHz

## Crest factor reduction (R&S®SMM-K548 option)

An R&S®SMM-K548 option requires an R&S®SMM-B9 baseband generator option.

Crest factor reduction can be applied to any waveform loaded in the arbitrary waveform generator.

State		on/off
Algorithm		clipping and filtering
Desired crest factor delta		–20 dB to 0 dB
Maximum iterations		1 to 10
Filter mode: simple		
Signal bandwidth		0 Hz to input file sample rate
Channel spacing		0 Hz to input file sample rate
Filter mode: enhanced		
Passband frequency		0 Hz to ½ of input file sample rate
Stopband frequency		0 Hz to ½ of input file sample rate
Maximum filter order		21 to 300

## Notched signals (R&S®SMM-K811 option)

Prerequisite: R&S®SMM-B9 baseband generator option must be installed. Up to 25 bandstop filters can be applied to the baseband signal. Center frequency and bandwidth can be set independently for each bandstop filter.

Supported standards and modulation systems	with R&S®SMM-B9 option	ARB
	with R&S®SMM-K55 option	LTE
	with R&S®SMM-K115 option	cellular IoT
	with R&S®SMM-K114 option	custom OFDM
Number of notches		1 to 25
Notch width		0 Hz to (0.1 · clock frequency)
Notch center frequency		–(0.5 · clock frequency) to +(0.5 · clock frequency)

## BER measurement (R&S®SMM-K80 option)

An R&S®SMM-B9 baseband generator option must be installed.

The data supplied by the DUT is compared with a reference pseudo-random bit sequence.

Clock		supplied by DUT; a clock pulse is required for each valid bit
Clock rate		100 Hz to 100 MHz
Data	PRBS	
	sequence length	9, 11, 15, 16, 20, 21, 23
	pattern ignore	off, All0, All1
	data enable	external
	modes	off, high, low
	restart	external
	modes	on/off
Synchronization time		28 clock cycles
Interfaces		4 BNC connectors, selectable from USER 1 to 6
Clock, data, enable and restart inputs	input impedance	1 k $\Omega$ , 50 $\Omega$
	trigger threshold	
	setting range	0.1 V to 2.0 V
	setting resolution	0.1 V
Polarity	data, clock, data enable	normal, inverted
Measurement time		selectable by means of maximum number of data bits or bit errors (max. 2 <sup>31</sup> bit each), continuous measurement
Measurement result	if selected number of data bits or bit errors is attained	BER in ppm, % or decade values
Status displays		not synchronized, no clock, no data

## BLER measurement (R&S®SMM-K80 option)

An R&S®SMM-B9 baseband generator option must be installed.

In BLER measurement mode, arbitrary data can be provided by the DUT. A signal marking the block's CRC has to be provided on the data enable connector of the BER/BLER option.

Clock		supplied by DUT; a clock pulse is required for each valid bit
Clock rate		100 Hz to 100 MHz
Data	input data	arbitrary
	data enable (marking the block's CRC)	external
	modes	high, low
CRC	CRC type	CCITT CRC16 ( $x^{16} + x^{12} + x^5 + 1$ )
	CRC bit order	MSB first, LSB first
Synchronization time		1 block
Interfaces		4 BNC connectors, selectable from USER 1 to 6
Clock, data, and enable inputs	input impedance	1 k $\Omega$ , 50 $\Omega$
	trigger threshold	
	setting range	0.1 V to 2.0 V
	setting resolution	0.1 V
Polarity	data, clock, data enable	normal, inverted
Measurement time		selectable by means of maximum number of received blocks or errors (maximum 2 <sup>31</sup> blocks each), continuous measurement
Measurement result	if selected number of received blocks or errors is attained	BLER in ppm, % or decade values
Status displays		not synchronized, no clock, no data

## ARB Ethernet upload (R&S®SMM-K507 option)

ARB Ethernet upload is a submode of arbitrary waveform mode (see R&S®SMM-B9 baseband generator with ARB option). This feature allows a fast upload and playback of waveform I/Q samples from an external source via UDP over a QSFP+ LAN interface into the R&S®SMM100A vector signal generator.

The waveform parameters and I/Q samples are transferred using special transmission commands (R&S®ARB upload protocol, see R&S®SMM-K507 user manual).


An R&S®SMM-B9 wideband baseband generator option must be installed.

ARB waveform		
File size, technical specification		see section Baseband generator with ARB (R&S®SMM-B9 option)
File generation		see R&S®SMM100A user manual, section Using the arbitrary waveform generator (ARB)
Upload transmission protocol		
R&S®ARB upload protocol		see R&S®SMM-K507 user manual
Marker signals		
Number of marker signals		3
Operating modes		waveform (unchanged), restart
Marker outputs		see section Baseband generator (R&S®SMM-B9 option)
Interface parameters		
LAN interface		
Connector	HS DIG I/Q 1, 2 on rear panel	QSFP+ (please note the recommended extras below)
Protocol		UDP over Ethernet
Data rate	10 Gigabit Ethernet or 40 Gigabit Ethernet can be configured in user interface	10 Gbit/s, 40 Gbit/s


# Signal performance for digital standards and modulation systems

## 5G NR (R&S®SMM-K144 option)


### Error vector magnitude

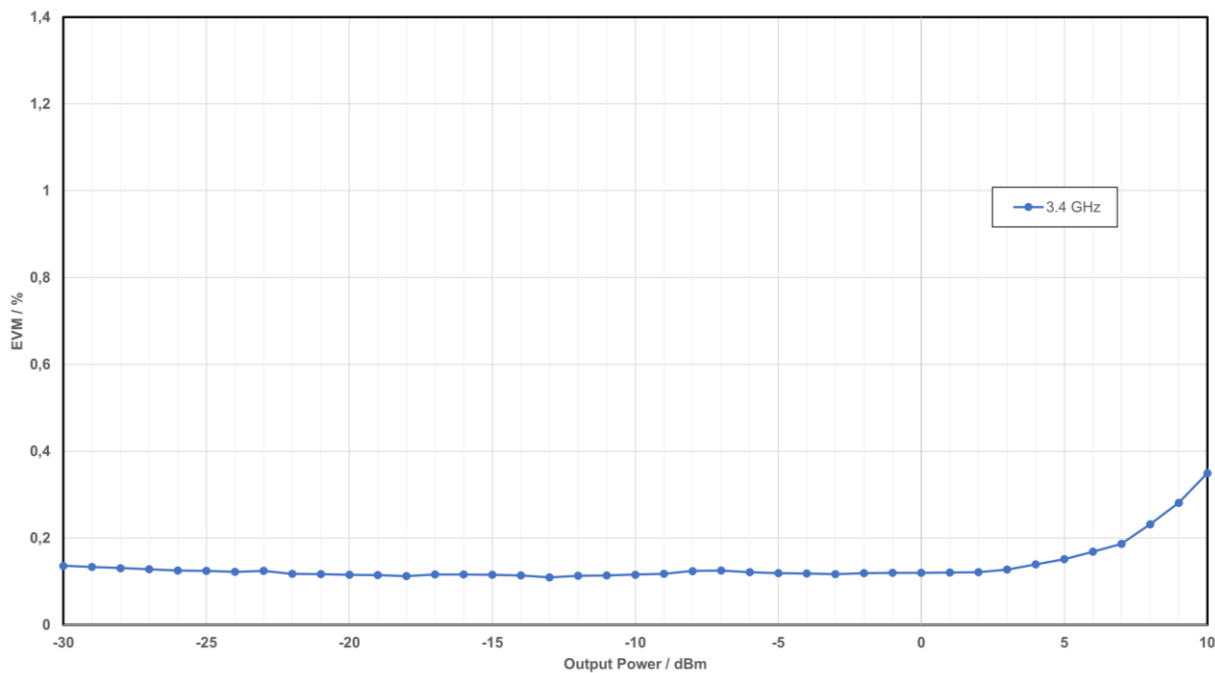

Measured EVM versus output power at  $f = 3.4$  GHz for 5G NR, 100 MHz, 64QAM, 60 kHz SCS, R&S®SMM-B709, linearize RF active

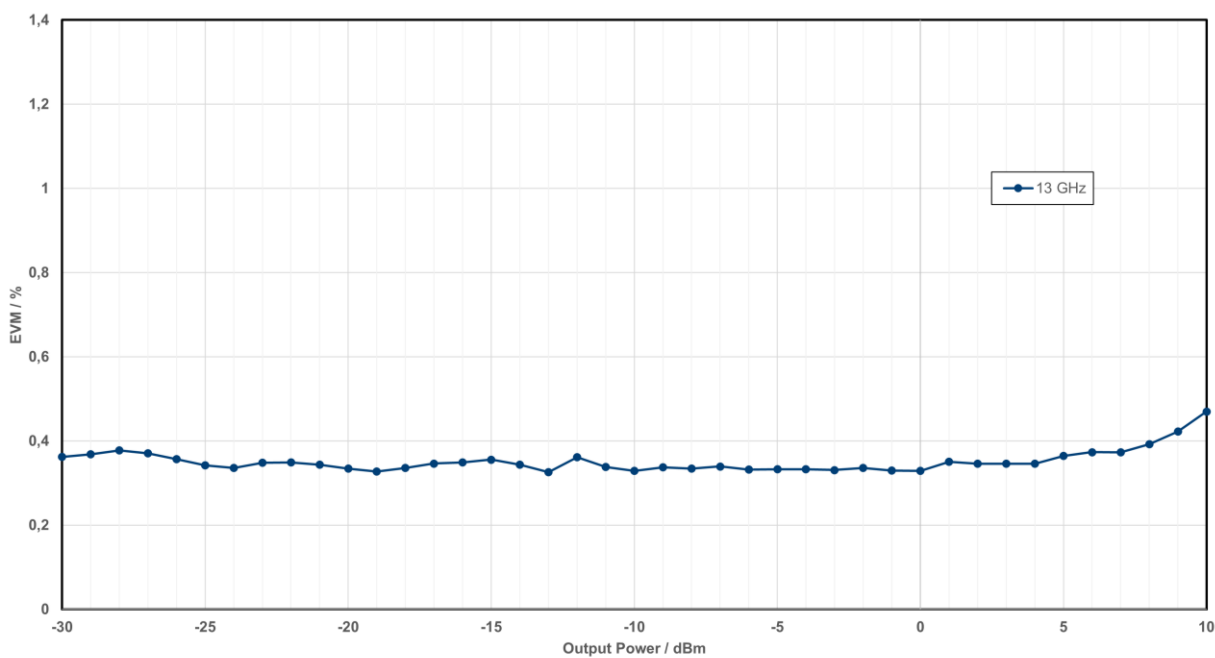


Measured EVM versus output power at  $f = 13$  GHz for 5G NR, 200 MHz, 64QAM, 60 kHz SCS, R&S®SMM-B709, linearize RF active

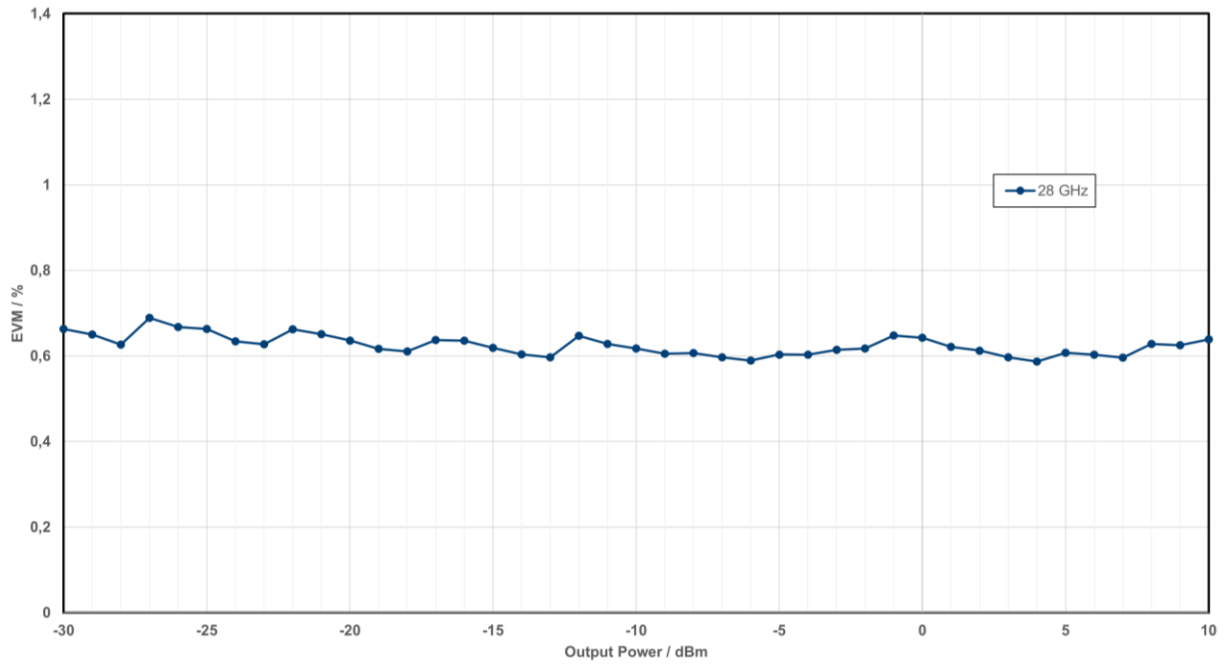

Measured EVM versus output power at  $f = 28$  GHz for 5G NR, 400 MHz, 64QAM, 120 kHz SCS, R&S®SMM-B709, linearize RF active

## EUTRA/LTE (R&S®SMM-K55 option)


### Adjacent channel power ratio

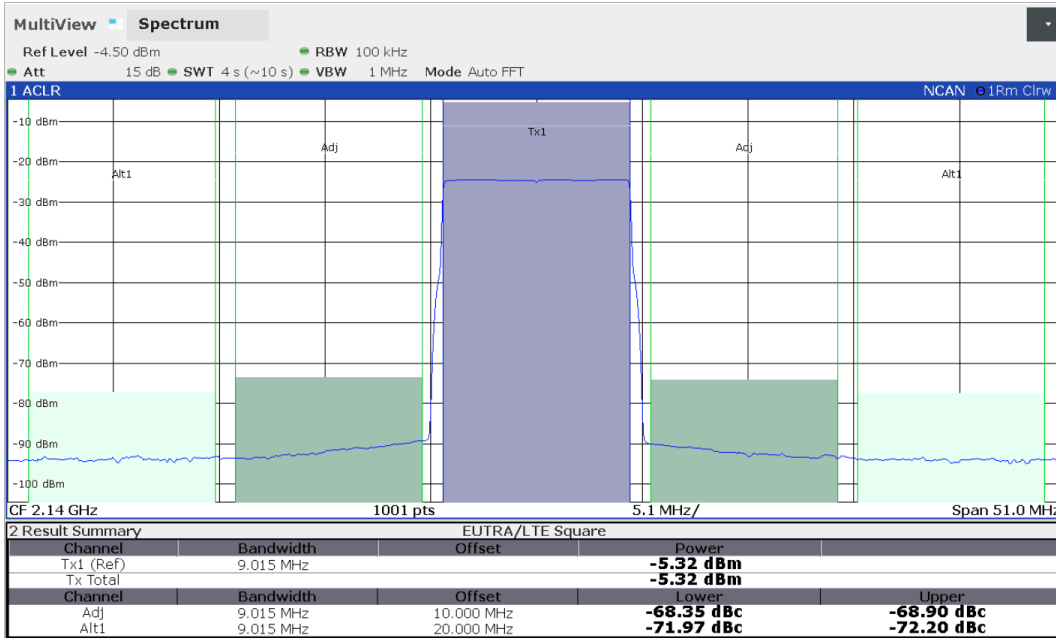


Measured ACPR for a 10 MHz LTE test model E-TM1\_1

## 3GPP FDD (R&S®SMM-K42 option)

Error vector magnitude	1 DPCH, RMS, frequency = 1800 MHz to 2200 MHz	< 0.8 %, 0.3 % (meas.)
Adjacent channel leakage ratio (ACLR)	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ 3 dBm, with R&S®SMM-B1006 frequency option	
	5 MHz offset	> 70 dB
	10 MHz offset	> 72 dB
	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ 0 dBm, with R&S®SMM-B1007, R&S®SMM-B1012 frequency options	
	5 MHz offset	> 68 dB
	10 MHz offset	> 70 dB
	test model 1, 64 DPCH, frequency = 1800 MHz to 2200 MHz, average channel power ≤ -2 dBm, with R&S®SMM-B1020, R&S®SMM-B1031, R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O frequency options	
	5 MHz offset	> 70 dB
10 MHz offset	> 72 dB	

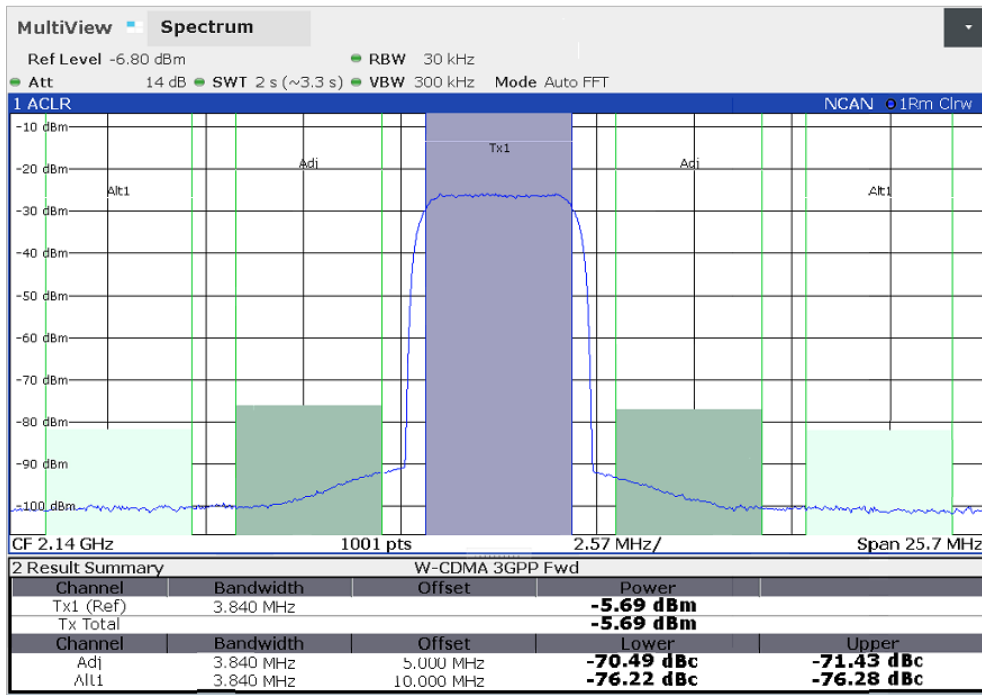


Measured ACPR for 3GPP test model 1, 64 DPCH

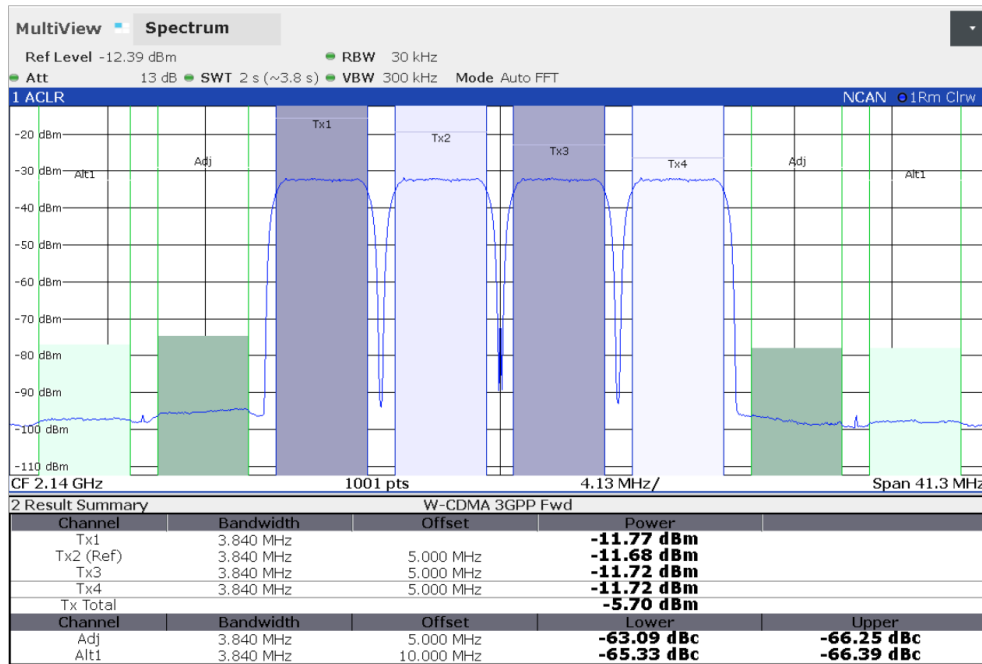

Measured ACPR for a 3GPP four-carrier signal with test model 1, 64 DPCH on each carrier

## IEEE 802.11be (R&S®SMM-K147 option)

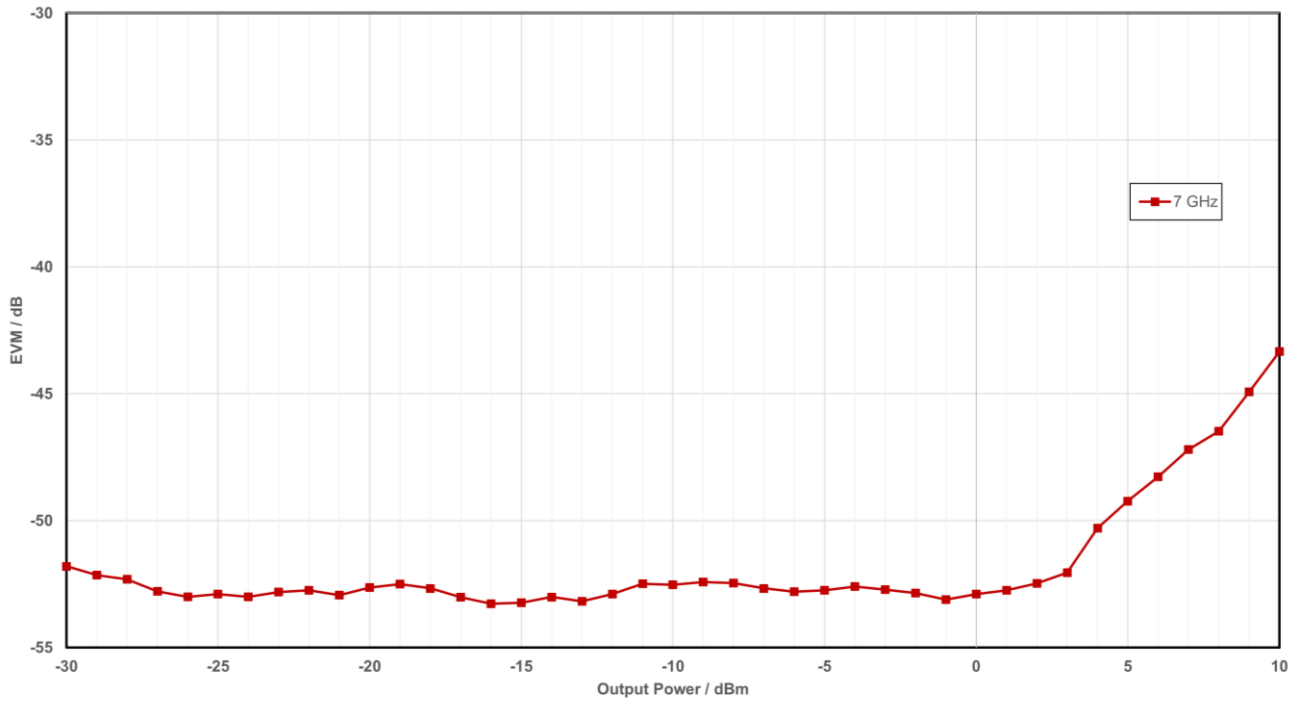


Measured EVM versus output power at  $f = 3.4$  GHz for IEEE 802.11be (320 MHz, MCS13, 300  $\mu$ s, Ch Estimation Seq Only)



## Custom digital modulation (R&S®SMM-B9, real-time mode)

Deviation error with 2FSK, 4FSK	Gaussian filter with $B \times T = 0.2$ to $0.7$ , $f = 1$ GHz, deviation $0.2$ to $0.7 \cdot$ symbol rate	
	symbol rate up to 2 MHz	0.25 % (meas.)
	symbol rate up to 10 MHz	0.75 % (meas.)
Phase error with MSK	Gaussian filter with $B \times T = 0.2$ to $0.7$ , $f = 1$ GHz	
	bit rate up to 2 MHz	$0.15^\circ$ (meas.)
	bit rate up to 10 MHz	$0.3^\circ$ (meas.)

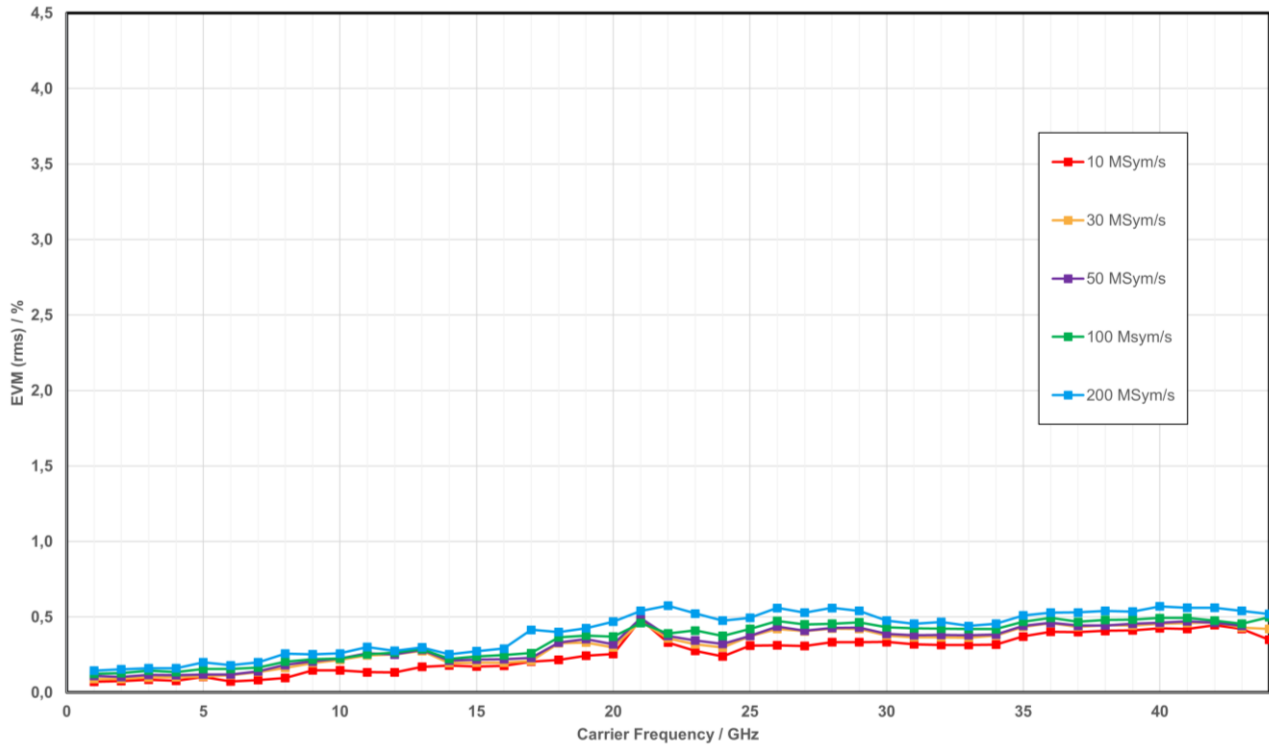

Measured EVM versus carrier frequency for 16QAM

## Health and utilization monitoring service (HUMS) (R&S®SMM-K980 option)

Interfaces	protocols and interfaces supported for data readout and display	<ul style="list-style-type: none"> <li>• SNMP (v1, v2c, v3)</li> <li>• REST (JSON)</li> <li>• SCPI</li> <li>• device web</li> </ul>
Services	information provided	<ul style="list-style-type: none"> <li>• device information (model, serial number, BIOS, date, time, system, HUMS and software information)</li> <li>• customer defined information tags (e.g. for asset management)</li> <li>• equipment information (hardware, options, software, licenses)</li> <li>• system operating status</li> <li>• instrument security information</li> <li>• service related information (due dates etc.)</li> <li>• mass storage related information</li> <li>• instrument utilization data</li> <li>• device history (event log)</li> </ul>

## Remote control

Interfaces	remote control	IEC 60625 (GPIB IEEE-488.2)
	Ethernet/LAN	10/100/1000BASE-T
	USB	3.0 (super speed)
	serial	RS-232 <sup>10</sup>
Command set		SCPI 1999.5 or compatible command sets
IEC/IEEE bus address		0 to 30
Ethernet/LAN protocols and services		<ul style="list-style-type: none"> <li>• VISA VXI-11 (remote control)</li> <li>• Telnet/RawEthernet (remote control)</li> <li>• VNC (remote operation with web browser)</li> <li>• file transfer protocol (FTP)</li> <li>• SMB (mapping parts of the instrument to a host file system)</li> </ul>
Ethernet/LAN addressing		DHCP, static, support of ZeroConf and M-DNS to facilitate direct connection to a system controller
USB protocol		VISA USB-TMC

<sup>10</sup> Requires the R&S®TS-USB1 serial adapter (recommended extra).

# Connectors

## Front panel connectors

The following connectors are located on the front panel of the instrument.

RF 50 $\Omega$	RF output	
	R&S®SMM-B1006, R&S®SMM-B1007	N female
	R&S®SMM-B1012, R&S®SMM-B1020, R&S®SMM-B1031	test port adapter, PC 2.92 mm female (interchangeable port connector system)
	R&S®SMM-B1044, R&S®SMM-B1044N, R&S®SMM-B1044O	PC 1.85 mm male (adapter 1.85 mm female to female included as accessory)
I	I modulation input signal	BNC female
Q	Q modulation input signal	BNC female
USER 1, USER 2, USER 3	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female
SENSOR	connector for R&S®NRP-Zxx power sensors	6-pin ODU MINI-SNAP series B
USB	USB 2.0 connector for external USB devices such as: <ul style="list-style-type: none"> <li>• mouse and keyboard</li> <li>• R&amp;S®NRP-Zxx power sensors (with R&amp;S®NRP-Z4 adapter cable),</li> <li>• memory stick for software update and data exchange</li> <li>• USB serial adapter for RS-232 remote control</li> </ul>	USB type A

## Rear panel connectors

REF IN	reference frequency input	BNC female
REF OUT	reference frequency output	BNC female
INST TRG	trigger input for RF, e.g. for frequency or level sweep	BNC female
USER 4, USER 5, USER 6	user-configurable inputs or outputs, e.g. as trigger input or marker output	BNC female
EFC	input for electronic tuning of internal reference frequency	BNC female
LO IN	phase-coherent LO input	SMA female
LO OUT	phase-coherent LO output	SMA female
IEEE 488	remote control of instrument via GPIB	24-pin Amphenol series 57 female
DisplayPort	for future use	
HDMI	for future use	
LAN	provides remote control functionality and other services, see section Remote control	RJ-45
USB Device	USB 3.0 (super speed), remote control of instrument (USB-TMC)	USB type B
USB	USB 3.1 (10 Gbit/s super speed ports) connector for external USB devices such as: <ul style="list-style-type: none"> <li>• mouse and keyboard for enhanced operation</li> <li>• R&amp;S®NRP-Zxx power sensors (with R&amp;S®NRP-Z4 adapter cable) for external power measurements and level adjustment of instrument</li> <li>• memory stick for software update and data exchange</li> <li>• USB serial adapter for RS-232 remote control</li> </ul>	USB type A
EXT 1, EXT 2	inputs for external analog modulation signals	BNC female
Analog I/Q outputs		
I	analog I output alternative function: LF generator output	BNC female
$\bar{I}$	analog I-bar output	BNC female
Q	analog Q output alternative function: LF generator output	BNC female
$\bar{Q}$	analog Q-bar output	BNC female
<b>Connectors on baseband generator modules</b>		
T/M/C	for future use	BNC female
T/M 2	for future use	BNC female
DIG IQ IN 1	for future use	26-pin MDR
HS DIG IQ IN 1	high-speed digital input connectivity in line with R&S®Digital I/Q Interface	QSFP+/QSFP 28

## General data

<b>Power rating</b>		
Rated voltage		100 V to 240 V AC
Rated current		7.3 A to 4.6 A
Rated frequency		50 Hz to 60 Hz, 400 Hz
Rated power	when fully equipped	410 W (meas.)
<b>Environmental conditions</b>		
Temperature range	operating	+0 °C to +45 °C
	storage	−40 °C to +60 °C, temperature gradient < 5 K/hour
Damp heat		+40 °C, 90 % relative humidity, steady state, in line with EN 60068-2-78
Altitude	operating	4600 m
<b>Mechanical resistance</b>		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.15 mm amplitude const., 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	random	8 Hz to 500 Hz, acceleration 1.2 g RMS, in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I
<b>Product conformity</b>		
Electromagnetic compatibility	EU: in line with EMC Directive 2014/30/EU	applied harmonized standards: <ul style="list-style-type: none"> <li>• EN 61326-1 (industrial environment)</li> <li>• EN 61326-2-1</li> <li>• EN 55011 class A</li> <li>• EN 61000-3-2</li> <li>• EN 61000-3-3</li> </ul>
Electrical safety	EU: in line with Low Voltage Directive 2014/35/EU	applied harmonized standard: EN 61010-1
	USA	UL 61010-1
	Canada	CAN/CSA-C22.2 No. 61010-1
RoHS	EU: in line with Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment	EN IEC 63000
International certification	VDE – Association for Electrical, Electronic and Information Technologies	GS mark 40036426
	CSA – Canadian Standard Association	cCSA <sub>US</sub> mark 2571181
<b>Dimensions and weight</b>		
Dimensions	W × H × D	435 mm × 192 mm × 460 mm (17.1 in × 7.6 in × 18.1 in)
Weight	when fully equipped	20.1 kg (44.4 lb)
<b>Non-volatile memory</b>	standard	SSD, 512 Gbyte
<b>Calibration interval</b>		
Recommended calibration interval	operation 40 h/week in full range of specified environmental conditions	3 years

# Ordering information

R&S®SMM-Bxxx = hardware option,

R&S®SMM-Kxxx = software/key code option.

Designation	Type	Order No.
<b>Vector signal generator</b> <sup>11</sup> including power cable and quick start guide	R&S®SMM100A	1440.8002.02
<b>Options</b>		
Frequency options		
100 kHz to 6 GHz	R&S®SMM-B1006	1440.9009.02
100 kHz to 7.5 GHz	R&S®SMM-B1007	1440.9109.02
100 kHz to 12.75 GHz	R&S®SMM-B1012	1440.9209.02
100 kHz to 20 GHz	R&S®SMM-B1020	1440.9309.02
100 kHz to 31.8 GHz	R&S®SMM-B1031	1440.9409.02
100 kHz to 44 GHz	R&S®SMM-B1044	1440.9509.02
100 kHz to 44 GHz, I/Q modulation bandwidth and minimum pulse width limited from 20 GHz to 44 GHz	R&S®SMM-B1044N	1440.9609.02
100 kHz to 44 GHz, I/Q modulation bandwidth and minimum pulse width limited from 31.75 GHz to 37.05 GHz	R&S®SMM-B1044O	1441.0405.02
Phase noise performance options		
Low phase noise	R&S®SMM-B709	1441.0828.02
Other RF options		
Phase coherence	R&S®SMM-B90	1440.9709.02
Pulse modulator	R&S®SMM-K22	1441.1330.02
Pulse generator	R&S®SMM-K23	1441.1347.02
Multifunction generator	R&S®SMM-K24	1441.1353.02
External frontend control	R&S®SMM-K553	1441.1147.02
100 MHz, 1 GHz ultra low noise reference input/output	R&S®SMM-K703	1441.1301.02
Flexible reference input (1 MHz to 100 MHz)	R&S®SMM-K704	1441.1318.02
AM/FM/PM	R&S®SMM-K720	1441.1324.02
Baseband		
Baseband generator with ARB (64 Msample), 120 MHz RF bandwidth	R&S®SMM-B9	1440.9809.02
Differential analog I/Q outputs	R&S®SMM-K17	1441.2143.02
ARB memory extension to 512 Msample	R&S®SMM-K511	1441.1260.02
ARB memory extension to 1 Gsample	R&S®SMM-K512	1441.1276.02
ARB memory extension to 2 Gsample	R&S®SMM-K513	1441.2120.02
Baseband real-time extension, incl. CDM	R&S®SMM-K520	1441.2114.02
Baseband extension to 240 MHz RF bandwidth	R&S®SMM-K523	1441.2108.02
Baseband extension to 500 MHz RF bandwidth	R&S®SMM-K524	1441.2095.02
Baseband extension to 1 GHz RF bandwidth	R&S®SMM-K525	1441.2089.02
Baseband enhancements		
Additive white gaussian noise (AWGN)	R&S®SMM-K62	1441.2072.02
Bit error rate tester	R&S®SMM-K80	1441.2066.02
ARB Ethernet upload	R&S®SMM-K507	1441.0934.02
Envelope tracking	R&S®SMM-K540	1441.2050.02
AM/AM, AM/PM predistortion	R&S®SMM-K541	1441.2043.02
User-defined frequency response correction	R&S®SMM-K544	1441.2037.02
Crest factor reduction	R&S®SMM-K548	1441.1130.02
RF linearization	R&S®SMM-K575	1441.0834.02
Notched signals	R&S®SMM-K811	1441.1047.02
Digital standards		
See Digital Standards for Signal Generators specifications (PD 5213.9434.22).		
Digital standards using R&S®WinIQSIM2 <sup>12</sup>		
See Digital Standards for Signal Generators specifications (PD 5213.9434.22).		

<sup>11</sup> The base unit can only be ordered with an R&S®SMM-B10xx frequency option.

<sup>12</sup> R&S®WinIQSIM2 requires an external PC.

Designation	Type	Order No.
Option with external R&S®Pulse Sequencer Software or R&S®Pulse Sequencer DFS Software <sup>13</sup> See R&S®Pulse Sequencer Software specifications (PD 3607.1388.22).		
Waveform packages for signals from R&S®WinIQSIM2 <sup>12</sup> , R&S®Pulse Sequencer Software or R&S®Pulse Sequencer DFS Software <sup>13, 14</sup>		
1 waveform	R&S®SMM-K200	1441.1124.71
5 waveforms	R&S®SMM-K200	1441.1124.72
50 waveforms	R&S®SMM-K200	1441.1124.75
Other options		
Health and utilization monitoring service (HUMS)	R&S®SMM-K980	1441.1118.02
<b>Recommended extras</b>		
19" rack adapter	R&S®ZZA-KN4	1175.3033.00
Cable, for connecting Rohde & Schwarz digital baseband interfaces	R&S®SMU-Z6	1415.0201.02
Cable, for HS digital I/Q interface (optical cable, QSFP+ plug)	R&S®DIGIQ-HS	3641.2948.03
USB serial adapter, for RS-232 remote control	R&S®TS-USB1	6124.2531.00
Adapters, for instruments with an R&S®SMM-B1012/-B1020/-B2020/-B1031 frequency option		
Test port adapter, 2.92 mm female		1036.4790.00
Test port adapter, 2.92 mm male		1036.4802.00
Test port adapter, N female		1036.4777.00
Test port adapter, N male		1036.4783.00
Adapters, for instruments with an R&S®SMM-B1044/-B1044N frequency option		
Coaxial adapter, 1.85 mm (f) to 1.85 mm (f)		3588.9654.00
Coaxial adapter, 1.85 mm (f) to 2.92 mm (f)		3628.4728.02
<b>Documentation</b>		
Documentation of calibration values	R&S®DCV-2	0240.2193.18

## Warranty and service

<b>Warranty</b>		
Base unit		1 year
All other items		1 year
<b>Service options</b>		
	<b>Service plans</b>	<b>On demand</b>
Calibration	up to five years <sup>15</sup>	pay per calibration
Warranty and repair	up to five years <sup>15</sup>	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

Wi-Fi is a registered trademark of Wi-Fi Alliance.

<sup>13</sup> R&S®Pulse Sequencer Software and R&S®Pulse Sequencer DFS Software requires an external PC.

<sup>14</sup> Maximum 250 waveforms per instrument can be registered.

<sup>15</sup> For extended periods, contact your Rohde & Schwarz sales office.

**Service at Rohde & Schwarz**  
**You're in great hands**

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

**Rohde & Schwarz**

The Rohde&Schwarz technology group is among the trail-blazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

**Sustainable product design**

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

**Rohde & Schwarz training**

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

**Rohde & Schwarz customer support**

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

