FPA-700-6000-37-40S

0.7~6GHz, 37dB, 40dBm

Features:
* Small Size
* Low Power Consumption

Applications:
* Wireless
* Transmitter
* Laboratory Test

Electrical

Frequency:	0.7~6GHz
Gain:	37dB min.
Gain Flatness:	3±2dB max.
Output Power (Psat):	40dBm min.
Output Power (P1dB):	37dBm min.
Current:	2A max.
Voltage:	28~32V/5A
	32V max.
Spurious:	-65dBc max.
Harmonic:	-10dBc min.
Input VSWR:	2 max.
Input Power:	3±3dBm
	+6dBm max.
PTT:	3.3~5V (On)
Impedance:	50Ω

Mechanical


Size[*1]:	159*72*23.5mm
	6.26*2.835*0.925in
RF Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole
Power Supply Interface:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-25~+55℃

Outline Drawings

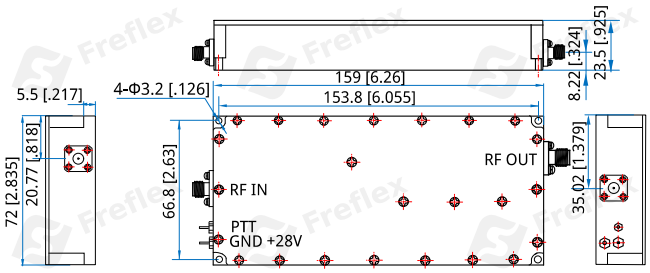

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

FPA-700-6000-37-40S

Customization is available upon request.