



Inner DC Block

DB6027A

10MHz-27GHz, 3.5mm, 60 Volts

Rev 1


Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-27 GHz
VSWR	1.25 max
Insertion Loss	0.4dB max
Voltage Rating	60 Volts max
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)
Operating Temp	-55°C to 100°C
RoHS	Compliant

Mechanical

Connector	3.5mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

Dimensions(mm)

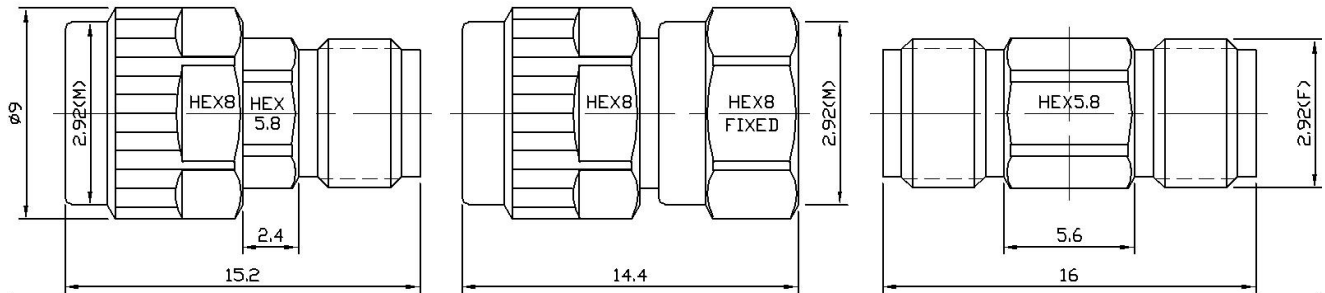

DB6027A

DB6027B

DB6027C

Note:

- By default the connector configuration is DB6027A.
- Options of DB6027B and DB6027C also available upon request.