



## Inner DC Block

## DB6034A

10MHz-34GHz, 3.5mm, 60 Volts

Rev 1


### Electrical & Environmental

Impedance	50 ohm
Frequency Range	10 MHz-34 GHz
VSWR	1.3 max
Insertion Loss	0.5dB max
Voltage Rating	60 Volts max
Input Avg Power	2 Watts max @25°C (Derate linearly to 0.2 Watt at 100°C)
Operating Temp	-55°C to 100°C
RoHS	Compliant

### Mechanical

Connector	3.5mm
Connector Body	Passivated Stainless Steel
Center Contact	1.27um Gold plated beryllium copper
Net Weight	About 3.5g

### Dimensions(mm)

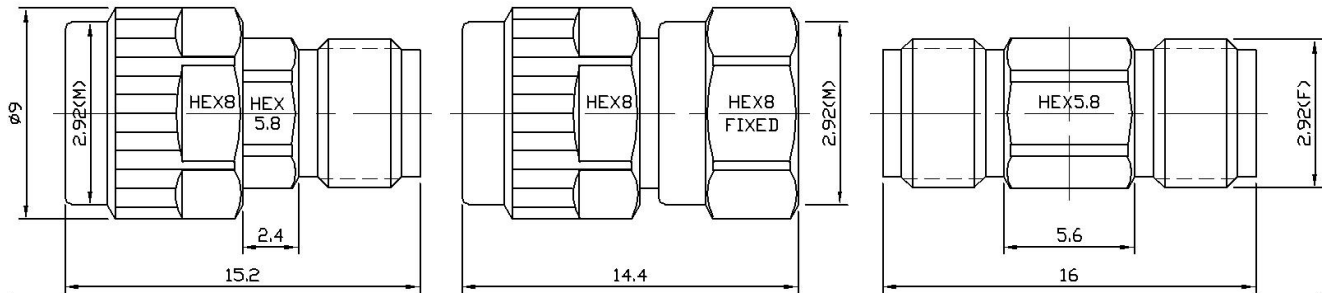

**DB6034A**

**DB6034B**

**DB6034C**

### Note:

- By default the connector configuration is DB6034A.
- Options of DB6034B and DB6034C also available upon request.



Typical Test Data

