



Electrical

| | | | | | | |
|------------------------|--|--|--|--|--|--|
| Impedance | 50 ohm | | | | | |
| Frequency Range | DC-12.4 GHz | | | | | |
| VSWR | 1.35 max | | | | | |
| Input Avg Power | 100W@ 25°C ambient, derating linearly to 10W at 100°C | | | | | |
| Peak Power | 5kW (5 micro-sec pulse width, 0.5% duty cycle) | | | | | |
| Direction | Bidirectional, N female to N male (other configurations available) | | | | | |

| | | | | | | |
|------------------------|--------|------|------|------|------|-------|
| Attenuation(dB) | 3 | 6-10 | 20 | 30 | 40 | 50,60 |
| Accuracy(dB) | +1.2/0 | ±1.5 | ±2.0 | ±1.0 | ±1.0 | ±1.1 |


Mechanical

| | |
|-----------------------|------------------------------------|
| Connector Body | Ternary alloy plated brass |
| Heat Sink | Black anodized aluminum |
| Center Contact | Gold plated beryllium copper/brass |
| Net Weight | Approx 600 g |

Environmental

| | |
|--------------------------------|------------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature | -55°C to 125°C |
| RoHS | Compliant |
| Temperature Coefficient | <0.0004 dB/dB/°C |

Dimensions(mm)

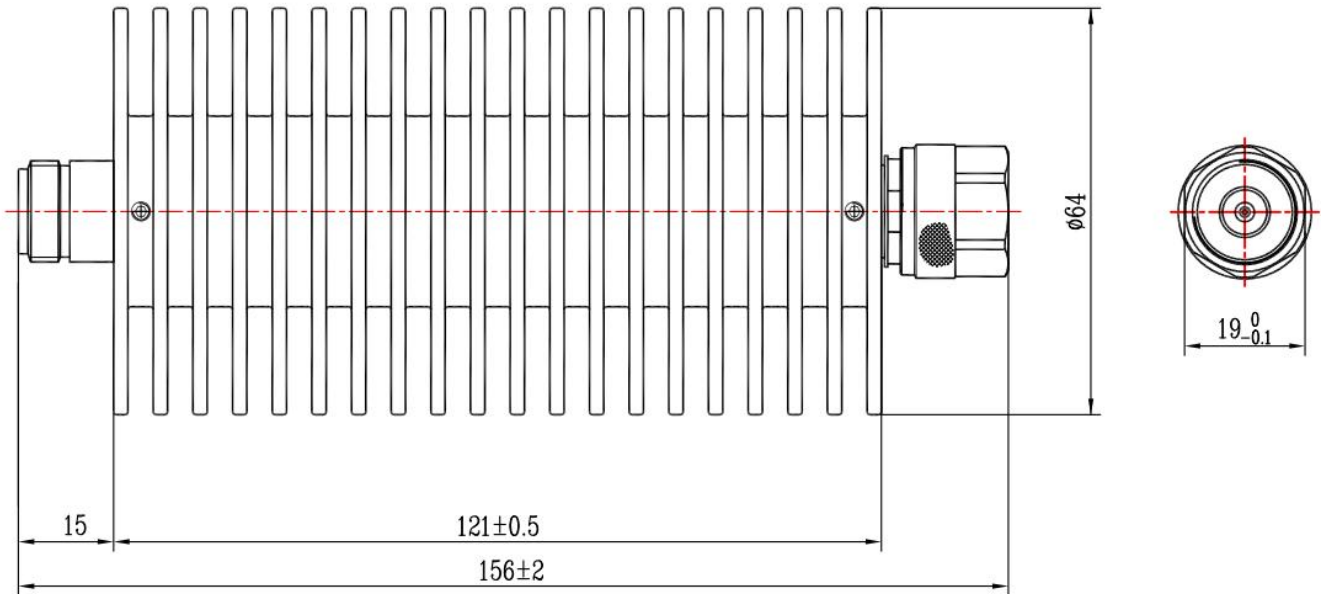

Notes

- 1.To maintain best performance, recommended to use fan to keep the case temperature under 85°C.
- 2.Customized dB values, outlines and optimal accuracy/VSWR available.

Model Description

RFHB12XXNC100

- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
A=female for two ends; B=male for two ends
C=female for one end and male for the other.