

WR22 Waveguide Electromechanical Switch, DPDT, Latching, 24V, UG383/U Flange

Electrical

Switch Type	DPDT*
Actuator Type	Latching
Frequency Range	32.9-50.1 GHz
VSWR	1.2 max
Insertion Loss	0.3 dB max
Isolation	55 dB min
Input Power (CW)	300 W max
Actuating Voltage	24±2V DC
Actuating Current	1A



Generic photo used for illustration only

*Adding an additional waveguide load for SPDT option.

Mechanical & Environmental



Switching Time	80 ms Typical
Operating Life	0.1 Million Cycles
Waveguide Size	WR22
Flange Type	UG383/U
Waveguide and Flange	Aluminum, Conductive Oxidation
Motor Finish	Black Anodizing
Actuator Terminals	MS3112E10-6P
Operating Temperature	-40 °C~+85 °C
Storage Temperature	-55 °C~+100 °C
Humidity	100% with the cap**
Pressure	30 PSIG with the cap, including the driver
Ingress Protection Rating	IP65 with the cap

**The weatherized cap is an integral part of the switch.

Remove the cap for access to manual override.

WR22 Waveguide Electromechanical Switch, DPDT, Latching, 24V, UG383/U Flange

Drawing (Dimensions are in mm)

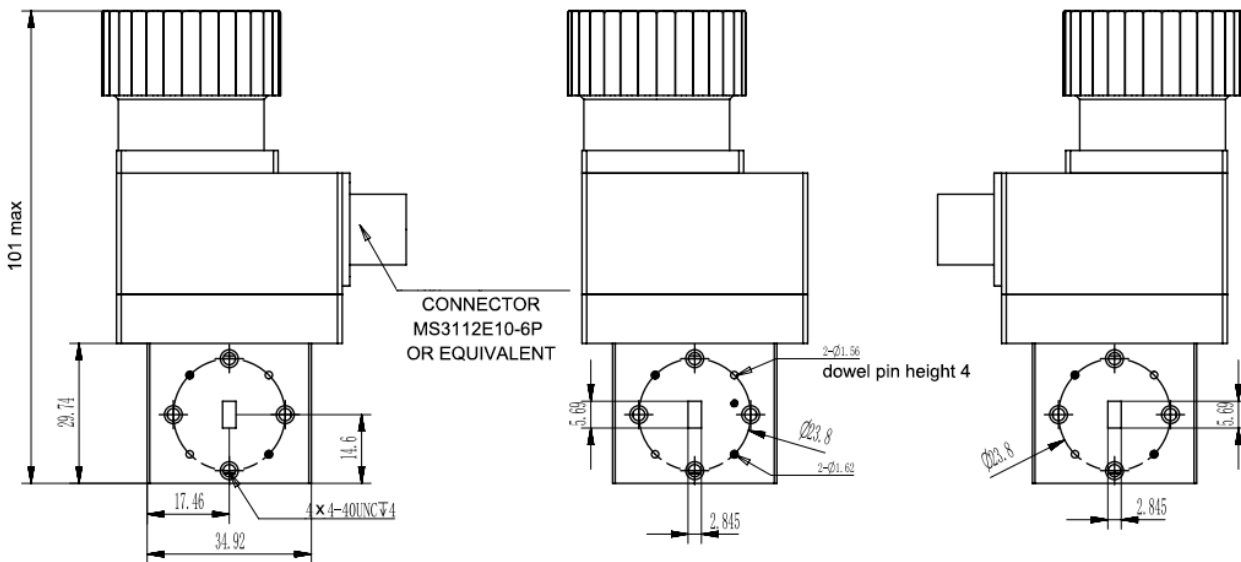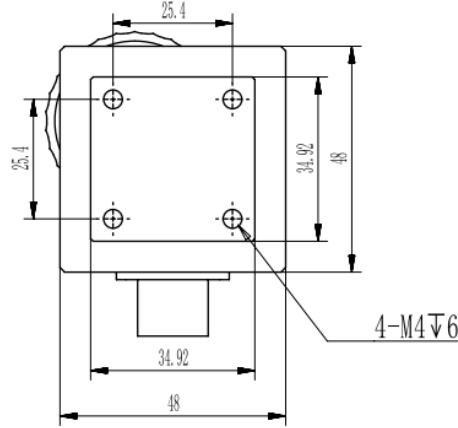

Schematic

