



ZC22
FIRST EDITION

**Catalog for Measure
and Test Products**

TONGHUI ELECTRONIC



en.tonghui.com.cn

Tonghui[®]
Since 1994

Join hands, benefit the future

- 1994 * Tonghui electronic was established locating in Changzhou Hi-Tech Zone.
- 1995 * Tonghui obtained the license of manufacturing T&M instruments from the government.
- 1996 * The first set of LCR Meter TH2811 was released. Tonghui entered into the impedance measurement industry.
- 1999 * Tonghui won the prize of "Measuring Instruments Quality Advanced Enterprise" from Jiangsu bureau of technical supervision.
* Tonghui changed the name to "Tonghui Electronic Limited company".
* Tonghui obtained the land of 6,000m² located in Tianshan road to build the new factory.
- 2001 * Tonghui moved to the new factory.
- 2002 * Tonghui got ISO9000: 2000 certification.
- 2003 * Tonghui enlarged the company size to have the land area 14000m² and construction area 8200m².
* Tonghui was assessed to be "New & Hi-tech Enterprise" by the government.
* Tonghui joined the association of China Electronic Instrument Industry.
- 2004 * The Automatic Component Analyzer TH2818 won the second prize of "Changzhou Science and Technology Progress Award" and the third prize of "Jiangsu Province Science and Technology Progress Award".
* Tonghui was awarded the "Top ten private-owned New & Hi-tech Enterprise in Changzhou Hi-tech District".
- 2006 * TH1961 6 ½ Digital Multimeter was developed and identified as "Changzhou Key Science and Technology Project".
* Tonghui was rated as "Credit Integrity Enterprise" by Changzhou Bank Association.
- 2007 * Tonghui won the title of "The most satisfied test instrument supplier in 2007".
- 2008 * Tonghui established the routine laboratory to test the mechanical, temperature, humidity, safety, power adaptability, electromagnetic compatibility and other performance indicators completely.
* Tonghui acquired CMMI software management international certification.
- 2009 * Tonghui was identified as "Hi-tech Enterprise of Jiangsu Province" again.
* Tonghui got the right to trading internationally.
* Tonghui brand was awarded as "Jiangsu famous-brand" by Jiangsu Quality Supervision and Management Committee.
- 2010 * Tonghui won the title of "2009 Customer most satisfied test instrument supplier in electronic transformer industry".
* Tonghui won the "Top 10 most influential brands" of electronic industry in the first industrial product selection.
- 2011 * Tonghui received the title of "Engineering Technology R&D center on Electronic Component Measurement Instrument of Changzhou City".
- 2012 * Tonghui was renamed as Changzhou Tonghui Electronic Co., Ltd.
* The pulse peak voltmeter TH2141 won the "2012 Electronic Measuring Instrument Product Digital Voltmeter/Multi-meter Product Design Award".
- 2014 * Tonghui's subsidiary corporation, Dongguan Tongxuan Electronic Technology Limited Company and Suzhou Jingshan Science Equipment Limited Company were established.
* Tonghui was awarded as "Star Enterprise of CEF" by China electronics Fair.
* The grand 20th anniversary ceremony was held.
- 2015 * Tonghui was listed in the market with the stock code: 833509.
* The high frequency LCR meter TH2826 series won the second prize of "Changzhou Science and Technology Progress Award".
- 2016 * Tonghui was awarded by Changzhou administration for industry and commerce as "Respect the contract and Credit Integrity Enterprise".
* Tonghui's trademark was recognized as a well-known trademark of Changzhou.
- 2017 * Tonghui was awarded "2017 Changzhou innovation and entrepreneurship competition" the first prize.
* Tonghui was funded by the special fund of the transformation of scientific and technological achievements of Jiangsu province.
* Tonghui was elected as vice chairman of the 8th council of China Electronic Instrument Industry Association.
- 2019 * Tonghui was identified as "Hi-tech Enterprise of Jiangsu Province" again.
* Tonghui won the second prize of the 2019 Changzhou Innovation and Entrepreneurship Competition.
* Tonghui won the second Prize of China Machinery Industry Science and Technology Award.
- 2020 * Tonghui was rated as the excellent company by the government.
* Power electronic tester was recognized as a special new product in Jiangsu Province.
* The research and development of energy feedback programmable high-power DC power supply won the third prize of the 2020 Changzhou Innovation and Entrepreneurship Competition.
* The Precision Impedance Analyzer TH2839 series was identified as the major equipment and key components of Changzhou in 2020.
- 2021 * Tonghui is listed on the selected layer of the National Equity Exchange System on January 11, 2021.
* Won the AAA corporate credit rating in August 2021.
* In August 2021, won the Integrity Management Enterprise
* First Prize of Jiangsu Innovation and Entrepreneurship Competition
* In September 2021, the company is relocated in No. 1, Xinzhu Road, Xinbei District, Changzhou with new buildings and production lines.



CHANGZHOU TONGHUI ELECTRONIC CO.,LTD.

en.tonghui.com.cn

■ Changzhou Tonghui Electronics Co., Ltd., founded in 1994, is a national high-tech enterprise integrating R&D, manufacturing and marketing. In September 2021, the company moved into a garden-style modern factory with 30,000 square meters land area and 30,000 square meters construction area. At present, there are more than 270 employees, 25% of which are R&D personnel. Tonghui was listed in Beijing Exchange in 2021 with the stock code 833509.

■ Since its establishment, the company has been committed to the technology and product research and development of electronic measuring instruments, especially in the field of precision impedance measurement, with nearly 30 years of accumulation of test theory, test technology and practical experience. Following the development trend of the industry, the company re-planned the development strategy of "intelligent testing, efficient testing, accurate testing, and industrial interconnection", and practiced the ingenuity of "professionalism, concentration, and concentration". Based on the in-depth understanding of the industry development prospects and the expansion of the electronic measuring instrument industry chain, the company is based on the power electronic magnetic component measuring instruments, and further develops the field of power electronic measuring instruments and complete sets of measurement system solutions, and is committed to becoming the world's leading electronic measurement instrument and integrated solution provider.

■ Tonghui currently has a product line with superior performance and rich specifications: component parameter testers, winding component testers, electrical safety test instruments, wire harness/cable testers, micro signal test instruments, power electronic test instruments, digital multimeters, data loggers, automatic power supply/battery comprehensive test systems, etc. Products are widely used in scientific research, production testing and quality management in the fields of 3C consumer electronics, 5G communications, semiconductor packaging and testing, new energy vehicles, power electronics, and household appliances. Tonghui insists on using innovative solutions to help customers solve measurement problems, improve test efficiency and product quality.

■ Looking forward to the future, Tonghui will continue to shoulder more social responsibilities with a pragmatic and steady attitude, dedicate innovation achievements and share development value with an international mind and vision. Tonghui will accurately grasp the business opportunities of the strong growth of the global electronic information industry, and realize the value of Tonghui in an all-round way.

Index

I . Component Parameter Test Instruments					
A. Impedance Analyzer					
NEW	TH2851 Series Impedance Analyzer	10Hz-130MHz	1mΩ-100M (Z)	0.08%	P1-2
	TH2839 Series Impedance Analyzer	20Hz-10MHz	0.1mHz	0.05%	P3-4
B. LCR Meter					
NEW	TH2840 Series High Speed LCR Meter	20Hz-2MHz	0.1mHz	0.05%	P5-7
☞	TH2838 Series Precision LCR Meter	20Hz-2MHz	0.1mHz	0.05%	P8-11
☞	TH2826 Series LCR Meter	20Hz-5MHz	10mHz	0.1%	P12
☞	TH2829 Series Automatic Component Analyzer	20Hz-1MHz	1mHz	0.05%	P13-14
☞	TH2827 Series Precision LCR Meter	20Hz-1MHz	10mHz	0.05%	P15-16
☞	TH283X Series Compact LCR Meter	50Hz-200kHz	1mHz	0.05%	P17-18
☞	TH2816A/TH2816B /TH2817A Precision LCR Meter	50Hz-200kHz	Dots Freq.	0.05%	P19-20
	TH2817B+ LCR Meter	50Hz-100kHz	Dots Freq.	0.1%	P21
	TH2817C+ LCR Meter	50Hz-100kHz	Dots Freq.	0.1%	P22
	TH2810B+ LCR Meter	100Hz-10kHz	Dots Freq.	0.1%	P23
	TH2810D LCR Meter	100Hz-10kHz	Dots Freq.	0.25%	P24
	TH2822 Series Handheld LCR Meter	100Hz-100kHz	Dots Freq.	0.1%	P25-26
	TH2638 Series Precision Capacitance Meter	100Hz-1MHz	Dots Freq.	0.07%	P27-28
C. Automatic Transformer Test System					
NEW	TH2840X Series Automatic Transformer Test System	20Hz-2MHz		24-288Pin	P29-32
☞	TH2829X Series Automatic Transformer Test System	20Hz-1MHz		20-192Pin	P33
D. DC Bias Current Source					
	TH1778A Series DC Bias Current Source	0Hz-2MHz			P34
II . Mirco Signal Type Tester					
A. fA meter/pA meter/Electrometer/High Resistance Meter					
NEW	TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter	1000V, 0.1fA, 1PΩ, 1fC			P35
B. DC Resistance Meter					
	TH2518 Series Resistance/ Temperature Scanner	1μΩ-2kΩ,90Ch			P36
☞	TH2515 DC Resistance Meter	0.1μΩ-110MΩ	TC	0.01%	P37-38
☞	TH2516 Series DC Resistance Meter	1μΩ-2MΩ	TC	0.05%	P39-40
C. Insulation Resistance Meter					
☞	TH2684/TH2684A High Precision Insulation Resistance Meter	10V-1000V(500V)		10kΩ-100TΩ	P41-42
☞	TH2683A/B Insulation Resistance Meter	10V-500V/1000V		100kΩ-10TΩ	P43
D. Digit Multimeter					
☞	TH1963/A/TH1953 Digit Multimeter	1199999 Digit			P44
☞	TH1941/TH1942 Digit Multimeter	21000/51000 Digit			P45-46
E. Battery Tester					
☞	TH2523 Series Battery Tester	100μV-350V	1μΩ-3.5kΩ	0.1%	P47
F. Electrolytic Capacitor Leakage Current Meter					
	TH2689/TH2689A Electrolytic Capacitor Leakage Current Meter	1V-500V/800V	0-20mA	0.3%	P48

III . Power Electronic Tester				
A. Programmable DC Power Supply				
☞	TH6200 Series DC Power Supply	Dual Range, Linear	80W-216W	P49
	TH6300 Series DC Power Supply	Wide Range, Linear	200W-600W	P50
☞	TH6400 Series Triple Programmable DC Power Supply	Multi Channels, Linear	Three Channels	P51
	TH6402B DC Power Supply	Multi Channels, Linear	Four Channels	P52
	TH6500 Series DC Power Supply	High Precision, Linear	96W-216W	P53
	TH6700 Series Programmable Switch DC Power Supply	0-800V/0-100A	360W-1080W	P54-55
	TH6900 Series Programmable DC Power Supply	0-1000V/0-200A	750W-3000W	P56-58
B. Programmable AC Power Supply				
☞	TH7100 Series Programmable AC Power Supply	0-300V/500W-2kW	45-500Hz	P59
C. DC Electronic Load				
	TH8200 Series Programmable DC Electronic Load		175W-1050W	P60-61
	TH8300 Series Programmable DC Electronic Load	Module, 2/5 (2/4/5/10 Channels)	100W-400W	P62-63
	TH8400 Series Programmable DC Electronic Load	Economic	175W-350W	P64
D. Multi-channel digital power meter				
☞	TH3300 Series Digital Power Meter	Single Channel	0.15%, 450Hz	P65
NEW	TH341X/TH342X Series Multi-channel Digital Power Meter	Single/Three/Four Channel	0.15%, 450Hz	P66
NEW	TH343X/TH344X Series Multi-channel Digital Power Meter	Single/Three/Four Channel	0.1%, 100Hz	P67-68

IV . Electrical Safety Tester and Cable Tester				
A. Hipot Tester				
☞	TH9110 Series AC/DC Hipot Tester	AC: 5kV/100mA	DC: 6kV/25mA	500VA P69
NEW	TH9120 Series AC/DC Hipot Tester	TH9120A: AC10kV/20mA	TH9120D: 12kV/10mA	P70-71
☞	TH9320-S4/S8 AC/DC Hipot Tester	AC: 5kV/20mA	DC: 6kV/10mA	4/8 Ch P72
☞	TH9310/TH9320 Series AC/DC Hipot Tester	AC: 5kV/20mA	DC: 6kV/10mA	P73
B. Parallel 8-channel Hipot Tester				
☞	TH9010 Series Parallel 8-channel Hipot Tester	AC: 5kV/10mA	DC: 6kV/5mA	Parallel 8 Ch P74
C. Impulse Winding Tester				
☞	TH2883S8-5/TH2883S4-5 Impulse Winding Tester	300V-5000V	4/8 Ch	≥10μH P75-76
☞	TH2883 Series Impulse Winding Tester	100V-1200V/5000V/10000V		≥1μH P77-78
	TH2882A Series Impulse Winding Tester	300V-3000V/5000V	Single/ Three Phase	≥10μH P79-80
D. Ground Bond Tester				
NEW	TH9410A/TH9411A Ground Bond Tester	AC: 0-32/45A	0-600mΩ	P81
	TH9403 Ground Bond Tester	AC: 0-30A	0-510mΩ	P82
F. Cable/Harness Tester				
	TH8601/A Cable/Harness Tester	64/128PIN		P83
	TH8602 Series Cable/Harness Tester	64-256PIN, Type C		P84
NEW	TH8603-4 Series Cable/Harness Tester	512PIN		P85

V . Accessories	
Accessories	P86-87

Component Parameter Test Instruments

I. TH2851 Series Impedance Analyzer

Features

- Test frequency: 10Hz-130MHz
- High precision: using automatic balance bridge technology, four-terminal pair test configuration
- High stability and consistency
- High speed: the fastest test speed up to 5ms
- High resolution: 10.1-inch capacitive touch screen, resolution 1280*800
- Three test methods: point test, list scan, and graph scan
- 1601 point multi-parameter list scanning function
- Four-parameter measurement
- 4-channel graphic scanning function, each channel can display 4 curves, 16 kinds of split-screen display modes for channels and curves
- Powerful sorting: 10 grades sorting in LCR mode
- Graphic scanning mode, each curve is sorted individually
- High compatibility: Support SCPI instruction set, compatible with KEYSIGHT E4990A, E4980A, E4980AL, HP4284A

Applications

■ Passive component

Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components

■ Semiconductor component

Parasitic parameter test and analysis of LED driver integrated circuit C-VDC features of varactors

Parasitic parameter analysis of transistors or integrated circuit

■ Other components

Impedance assessment of printed circuit boards, relays, switches, cables, batteries



RS232	GPIB	LAN	HANDER
standard	standard	standard	standard
USB HOST	USB DEVICE	HDMI	VGA
standard	standard	standard	standard

Dimension: 428mm(W)x220mm(H)x325mm(D)

Weight: 14.5kg

■ Dielectric material

Dielectric constant and loss angle evaluation of plastics, ceramics and other materials

■ Magnetic materials

Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials

■ Semiconductor materials

Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials

■ Liquid crystal cell

Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Model	TH2851-015	TH2851-030	TH2851-050	TH2851-080	TH2851-130
Display	10.1 Inches TFT LCD Display 1280×RGB×800, Touch Screen				
AC Parameter	Cp/Cs, Lp/Ls, Rp/Rs, Z , Y , R, X, G, B, θ , D, Q, V_{AC} , I_{AC}				
DC Parameter	V_{DC} , I_{DC} , DCR				
Test Frequency	Range	10Hz--15MHz	10Hz--30MHz	10Hz--50MHz	10Hz--80MHz
	Resolution	1mHz			
	Relative frequency tolerance	$\leq \pm 0.0007\%$			
Test Level	AC Voltage	5mV—2Vrms			
	Resolution	1mV			
	AC Current	50uA—20mArms			
	Resolution	10uA			
DC Bias	Voltage	0V±40V			
	Resolution	1mV			
	Current	0mA±100mA			
	Resolution	40uA			
Test terminal configuration	Four Terminal Pair				
Output impedance	25 Ω / 100 Ω				
Typical Test time (Speed)	Five Shift: 1(Fast)—5(Accuracy) 1: 2.5ms 2: 10ms 3: 40ms 4: 80ms 5: 400ms (Does not include the arithmetic average of the communication time, each frequency test speed will be slightly different)				

Component Parameter Test Instruments

I. TH2851 Series Impedance Analyzer

Max Accuracy	1kHz: 0.08% 1MHz: 0.08% 2MHz: 0.5% 10MHz: 1% 130MHz: 5.0%	
Test Range	E: 1×10^{18}	
Cs, Cp	-9.99999EF ~ +9.99999EF	
Ls, Lp	-9.99999EH ~ +9.99999EH	
D	-9.99999E ~ +9.99999E	
Q	-9.99999E ~ +9.99999E	
R, Rs, Rp, X, Z, R _{DC}	-9.99999EΩ ~ +9.99999EΩ	
G, B, Y	-9.99999ES ~ +9.99999ES	
Vdc	-9999V ~ +9999V	
Idc	-9999mA ~ +9999mA	
θ_r	-999999rad ~ +999999rad	
θ_d	-180.0deg ~ +180.0deg	
$\Delta\%$	-999999% ~ +999999%	
Multi-function parameter list scan	1601 points, each point can be set to average, and each point can be sorted separately Sweep parameters: measurement parameters, test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current	
Graphic scan	parameter	Frequency, ACV, ACI, DCV, DCI
	Types	Logarithmic, linear, frequency segmentation
	Points	2-1601
	Number of channels	4
	Number of curves	4 Per Channel
	Split Screen	14 (Channel and Curve)
Equivalent circuit analysis	3-element model: 4, 4-element model: 3	
Sorting	10 levels of sorting in LCR mode; each curve in scan mode is sorted individually	
Interface	RS232C, USB HOST, USB DEVICE, LAN, GPIB, HANDLER, VGA, HDMI	
Power-on warm-up time	60 Minutes	
Input Voltage	100-120VAC/198-242VAC Option, 47-63Hz	
Power consumption	Max 150VA	
Measurement (WxHxD) mm ³	428x220x325	
Weight	14.5kg	

Standard Accessories

Three core power cord
 TH26010 Gold-plated short circuit board
 TH26005D Test fixture
 TH26047A Test fixture

TH26082A 100Ω Standard Resistance
 TH26061D_P1 Calibration Kit
 AR05TTS1000N

Component Parameter Test Instruments

I. TH2839 Series Impedance Analyzer

Features

- High accuracy: Auto-balance bridge technology, 4-terminal pair
- High stability and consistency: Up to 15 test ranges
- High speed: Up to 7.7ms
- High resolution: 7-inch, 800×600
- 201 Points List Sweep Function
- Multi-parameter Graphic Sweep Function
- Varactor diode automatic polarity function
- 10 bins sorting, sorting result with sound and light alarm
- Storage space: Internal: 40 groups of setting files
USB External: 500 groups of setting files, data log files and image files
- Simultaneous testing for L_s - R_{DC}
- High compatibility: Support SCPI commands, compatible with KEYSIGHT E4980A, E4980AL, HP4284A etc.



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard
GPIB		SCANNER		
option		option		

Dimension(mm): 400mm(W)x132mm(H)x425mm(D)

Weight : 15kg

Applications

- **Passive component:**
Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components
- **Semiconductor component**
Parasitic parameter test and analysis of LED driver integrated circuit
C-VDC features of varactors
Parasitic parameter analysis of transistors or integrated circuit
- **Other components**
Impedance assessment of printed circuit boards, relays, switches, cables, batteries

- **Dielectric material**
Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
- **Magnetic materials**
Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials
- **Semiconductor materials**
Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials
- **Liquid crystal cell**
Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Model	TH2839	TH2839A
Display	7-inch TFT LCD display 800XRGBX600	
AC Test parameters	Cp/Cs, Lp/Ls, Rp/Rs, Z , Y , R, X, G, B, θ , D, Q, Vac, lac	
DC Test parameters	Rdc, Vdc, Idc	
Test Frequency	Range	20Hz-10MHz
	Highest resolution	20Hz — 5MHz
Test level	AC voltage	20Hz — 2MHz: 5mV — 2Vrms 2MHz — 10MHz: 5mV — 1Vrms
	Resolution	100uV
	AC current	20Hz — 2MHz: 50uA—20mArms 2MHz — 10MHz: 50uA—10mArms
	Resolution	1uA
	DC Voltage	100mV — 2V
	Resolution	100uV
DC bias	Voltage	0V — \pm 40V
	Resolution	100uV
	Current	0mA — \pm 100mA
	Resolution	1uA
DC voltage source	Voltage range	-10V — 10V
	Current range	-45mA — +45mA
	Output impedance	100 Ω
Test terminal configuration	Four-terminal pair	
Output impedance	100 Ω	
Typical measurement time (speed)	Fast: 7.7ms/time Medium: 120ms/time Slow: 230ms/time	

Component Parameter Test Instruments

I. TH2839 Series Impedance Analyzer

Model	TH2839		TH2839A
Highest accuracy	1kHz: 0.05% 1MHz: 0.05% 2MHz: 0.1% 5MHz: 0.5% 10MHz: 1.0%		1kHz: 0.05% 1MHz: 0.05% 2MHz: 0.1% 5MHz: 0.5%
Cable length	0, 1, 2		
Graph sweep	Parameters	FREQ, ACV, ACV/I, DCV/I, DC voltage source	
	Type	Logarithm, linearity	
	Sweep points	51, 101, 201, 401 or 801	
Equivalent circuit analysis	Additional purchase required		
Interface	USB HOST, USB DEVICE, LAN, HANDLER, RS232C, SCANNER, Temperature Input sensor Optional: GPIB		
Warm-up time	60 minutes		
Input voltage	Optional 100-120VAC/198-242VAC, 47-63Hz		
Power consumption	80VA		
Dimension(WxHxD)mm ³	400 x 132 x 425		
Weight	15kg		

Standard Accessories

Three core power cord

TH26010 Gold-plated short circuit board

TH26047 Test fixture

TH26005C Four-terminal test fixture

TH26011BS 4 terminal pair Kelvin test clip leads

Component Parameter Test Instruments

I. TH2840 Series Precision LCR Meter

Features

- The test speed is as high as 1800 times/s (>10kHz), without relay action time
- Test level up to 20Vrms
- The bias voltage is built-in $\pm 40V/\pm 100mA/2A$
- Industry-friendly user experience: Linux bottom layer, built-in help file
- 10.1 inch 1280×800 capacitive touch screen
- Approximately 100M setting file storage space in the machine, and massive U disk setting file storage capacity
- Provide host computer to support early model file format conversion to ensure compatibility



RS232	USB HOST	USB DEVICE	HANDLER	LAN	EXTERNAL DCI
standard	standard	standard	standard	standard	standard

Dimension: 430mm(W)x177mm(H)x265mm(D)

Weight: 11kg

Applications

- **Passive component:**
Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components
- **Semiconductor component**
Parasitic parameter test and analysis of LED driver integrated circuit
C-VDC features of varactors
Parasitic parameter analysis of transistors or integrated circuit
- **Other components**
Impedance assessment of printed circuit boards, relays, switches, cables, batteries

- **Dielectric material**
Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
- **Magnetic materials**
Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials
- **Semiconductor materials**
Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials
- **Liquid crystal cell**
Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Model		TH2840A	TH2840B	
Display	Display	10.1" Touch Screen		
	Ratio	16:9		
	Resolution	1280×RGB×800		
Parameter	Test Mode	Four Parameter Selectable		
	AC	Cp/Cs, Lp/Ls, Rp/Rs, Z , Y , R, X, G, B, θ , D, Q, V_{AC} , I_{AC}		
	DC	R_{DC} , V_{DC} , I_{DC}		
Frequency	Range	20Hz-500kHz	20Hz-2MHz	
	Accuracy	0.01%		
	Resolution	0.1mHz	(20.0000Hz-99.9999Hz)	
		1mHz	(100.000Hz-999.999Hz)	
		10mHz	(1.00000kHz-9.99999kHz)	
		100mHz	(10.0000kHz-99.9999kHz)	
		1Hz	(100.000kHz-999.999kHz)	
10Hz		(1.00000MHz-2.00000MHz)		
AC test signal mode	Rated value (ALC OFF)	Set the voltage as the Hcur voltage when the test terminal is open Set the current to be the current flowing from Hcur when the test terminal is short-circuited		
	Constant value (ALC ON)	Keep the voltage on the DUT the same as the set value Keep the current on the DUT the same as the set value		

Component Parameter Test Instruments

I. TH2840 Series Precision LCR Meter

Test Level	AC Voltage	5mVrms-20Vrms	F \leq 1MHz 5mVrms-20Vrms F > 1MHz 5mVrms-15Vrms
	Accuracy	$\pm (10\% \times \text{Set Value} + 2\text{mV})$ (AC less than 2Vrms) $\pm (10\% \times \text{Set Value} + 5\text{mV})$ (AC > 2Vrms)	
	Resolution	1mVrms (5mVrms-0.2Vrms)	
		1mVrms (0.2Vrms-0.5Vrms)	
		1mVrms (0.5Vrms-1Vrms)	
		10mVrms (1Vrms-2Vrms)	
		10mVrms (2Vrms-5Vrms)	
		10mVrms (5Vrms-10Vrms)	
	10mVrms (10Vrms-20Vrms)		
	AC Current	50 μ Arms-100mArms	
Resolution(100 Ω Internal Resistance)	10 μ Arms (50 μ Arms-2mArms)		
	10 μ Arms (2mArms-5mArms)		
	10 μ Arms (5mArms-10mArms)		
	100 μ Arms (10mArms-20mArms)		
	100 μ Arms (20mArms-50mArms)		
100 μ Arms (50mArms-100mArms)			
R _{DC} Test	Voltage	100mV-20V	
	Resolution	1mV (0V-1V)	
		10mV (1V-20V)	
	Current	0mA-100mA	
Resolution	10 μ A (0mA-10mA)		
	100 μ A (10mA-100mA)		
DC Bias	Voltage	0V- \pm 40V	
	Accuracy	AC \leq 2V 1% \times Set Value+5mV	
		AC>2V 2% \times Set Value+8mV	
	Resolution	1mV (0V-1V)	
		10mV (\pm 1V- \pm 40V)	
Current	0mA- \pm 100mA		
Resolution	10 μ A (0mA-10mA)		
	100 μ A (10mA-100mA)		
Built-in current source	Current	0mA-2A	
	Accuracy	I>5mA $\pm (2\% \times \text{Set Value} + 2\text{mA})$	
	Resolution	1mA	
Test terminal configuration	Four Terminal Pair		
Test cable length	0m		
Output impedance	30 Ω , \pm 4%@1kHz		
	100 Ω , \pm 2%@1kHz		
computation	The absolute deviation from the nominal value Δ , the percentage deviation from the nominal value $\Delta\%$		
Equivalent way	Series, Parallel		
Calibration function	OPEN, SHORT, LOAD		
Measurement average	1-255		
Range selection	AUTO, HOLD		
Range configuration	LCR	100m Ω , 1 Ω , 10 Ω , 20 Ω , 50 Ω , 100 Ω , 200 Ω , 500 Ω , 1k Ω , 2k Ω , 5k Ω , 10k Ω , 20k Ω , 50k Ω , 100k Ω	
	R _{DC}	1 Ω , 10 Ω , 20 Ω , 50 Ω , 100 Ω , 200 Ω , 500 Ω , 1k Ω , 2k Ω , 5k Ω , 10k Ω , 20k Ω , 50k Ω , 100k Ω	
Measuring time (ms)	Fast+: 0.56ms (1800 times/s) Fast: 3.3ms Middle: 90ms Slow: 220ms		
Highest accuracy	0.05% (refer to the instruction manual for details)		
Measurement display range			
Cs, Cp	0.00001pF-9.99999F		
Ls, Lp	0.00001 μ H-99.9999kH		
D	0.00001-9.99999		
Q	0.00001-99999.9		
R, Rs, Rp, X, Z, R _{DC}	0.001m Ω -99.9999M Ω		

Component Parameter Test Instruments

I. TH2840 Series Precision LCR Meter

G, B, Y		0.00001 μ s-99.9999S	
V _{DC}		$\pm 0V$ - $\pm 999.999V$	
I _{DC}		$\pm 0A$ - $\pm 999.999A$	
θ_r		-3.14159-3.14159	
θ_d		-179.999°-179.999°	
$\Delta\%$		$\pm (0.000\%-999.9\%)$	
Multi-function parameter list scan	Dots Number	201 points, average times can be set for each point, and each point can be sorted separately	
	Parameter	Test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current (100mA), DC BIAS current (2A)	
	Trigger mode	Sequence SEQ: After a trigger, measure at all sweep points, and /EOM/INDEX will output only once Step STEP: Perform a sweep point measurement each time it is triggered, and each point outputs /EOM/INDEX, but the list sweep comparator result is only output at the last /EOM	
	Other features	1.Scan parameters and test parameters have multiple copy functions 2.Delay can be set for each scan point	
	Comparators	Each sweep point can measure up to four test parameters, each parameter can set upper and lower limits, all test parameters are qualified, output PASS signal, otherwise output FAIL signal, no upper and lower limits are set, no judgment	
Graphic scan	Scan points	51, 101, 201, 401, 801 Optional	
	The results	The extreme value of each parameter and the sweep parameter value at the point where the cursor is located and the corresponding test parameter value	
	Scan trajectory	1-4 test parameters can be selected arbitrarily, the scanning curve can be divided into one screen, two screens, or four screens	
	Display range	Real-time automatic, locked	
	Coordinate ruler	Logarithmic, linear	
	Scan parameters	Frequency, AC voltage, AC current, DCV BIAS / DCI BIAS (100mA) / DCI BIAS (2A)	
	Trigger mode	single	Manually trigger once, and complete a scan from the start point to the end point, and the next trigger signal starts a new scan
		continuous	Infinite loop scanning from start to end
Results save	Graphics, files		
Comparators	Bin	10Bin, PASS, FAIL	
	Bin deviation setting	Deviation value, percentage deviation value, off	
	Bin mode	Tolerance, continuous	
	Bin count	0-99999	
	Discrimination	Up to four parameter limit ranges can be set for each file. The corresponding file number is displayed within the setting range of the four test parameter results. If the maximum file number range is exceeded, FAIL is displayed. The test parameters without the upper and lower limits are automatically ignored.	
	PASS/FAIL indication	Meet Bin1-10, the PASS light on the front panel is on, otherwise the FAIL light	
Data cache	201 measurement results can be read in batches		
Store call	Inside	About 100M non-volatile memory test setting file	
	External USB	Test setting file, screenshot graph, record file	
Keyboard lock	The front panel keys can be locked, other functions to be expanded		
Interface	USB HOST	2 USB HOST ports, can connect mouse and keyboard at the same time, only one U disk can be used at the same time	
	USB DEVICE	Universal serial bus socket, small type B (4 contact positions); compatible with USB TMC-USB488 and USB2.0, the female connector is used to connect an external controller.	
	LAN	10/100M Ethernet adaptive	
	HANDLER	Used for Bin signal output	
	External DC BIAS control	Support TH1778A	
	RS232C RS485	Standard 9-pin, cross Can accept modification or external RS232 to RS485 module	
Power-on warm-up time	60 Minutes		
Input voltage	100-120VAC/198-242VAC Option, 47-63Hz		
Power consumption	More than 130VA		
Size (WxHxD) mm ³	430x177x265		
Weight (kg)	11kg		

Component Parameter Test Instruments

I. TH2838 Series Precision LCR Meter

Features

- High accuracy: Adopt Auto-balance bridge technology, 4-terminal pair
- High stability and consistency: Up to 15 ranges
- High speed: Up to 5.6ms
- High resolution: 7-inch, 800×600
- High power:
 - Signal source: Voltage up to 20Vrms (only TH2838H)
Current up to 100mA (only TH2838H)
 - DC bias: Voltage up to ±40V (only TH2838H)
Current up to 100mA
Up to 120A when controlling 6 sets of TH1778 series DC Bias Current Source by external DC Bias interface
Independent Voltage Source: ±10V programmable output (only TH2838H)
- Multi-parameter Graphic Sweep Function
- Arithmetical operation
- 10 bins sorting, sorting result with sound and light alarm
- Huge storage space:
 - Internal: 40 groups of setting files, 10 groups of gif image files
 - External: 500 groups of setting files through USB storage
- High compatibility: Support SCPI commands, compatible with KEYSIGHT E4980A, E4980AL, HP4284A etc.



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH2838 Series

Dimension (mm): 400(W) x 132(H) x 425(D)
Net weight : 15kg

Application

1. Passive component
 - Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components
2. Semiconductor component
 - Parasitic parameter test and analysis of LED driver integrated circuit C-VDC features of varactors Parasitic parameter analysis of transistors or integrated circuit
3. Other components
 - Impedance assessment of printed circuit boards, relays, switches, cables, batteries
4. Dielectric material
 - Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
5. Magnetic materials
 - Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials
6. Semiconductor materials
 - Dielectric constant, electric conductivity and C-V characteristics of semiconductor materials Liquid crystal cell of dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Model	TH2838	TH2838H	TH2838A	
Test Signal Source				
Output impedance	100Ω, ±1% @1kHz			
Frequency	Range	20Hz-2MHz		
	Resolution	20.0000Hz - 99.9999Hz	0.1mHz	20Hz-1MHz
		100.000Hz - 999.999Hz	1mHz	
		1.00000kHz - 9.99999kHz	10mHz	
		10.0000kHz - 99.9999kHz	0.1Hz	
		100.000kHz - 999.999kHz	1Hz	
1.00000MHz - 2.00000MHz	10Hz			

Component Parameter Test Instruments

I. TH2838 Series Precision LCR Meter

AC test signal		Rated value(ALC OFF): Set the voltage as the Hcur voltage when the test terminal is open Set the current as the Hcur current when the test terminal is short Constant value(ALC ON): Keep the voltage in DUT is the same as the set value Keep the current in DUT is the same as the set value		
AC signal	Voltage range	5mVrms -- 2Vrms	F≤1MHz 5mVrms-- 20Vrms F >1MHz 5mVrms -- 15Vrms	5mVrms -- 2Vrms
	Resolution	5mVrms -- 0.2Vrms	100μVrms	
		0.2Vrms -- 0.5Vrms	200μVrms	
		0.5Vrms -- 1Vrms	500μVrms	
		1Vrms -- 2Vrms	1mVrms	
		2Vrms -- 5Vrms	2mVrms	
		5Vrms -- 10Vrms	5mVrms	
	10Vrms -- 20Vrms	10mVrms		
	Current range	50μArms -- 20mArms	50μArms --100mArms	50μArms -- 20mArms
	Resolution	50μArms -- 2mArms	1 μArms	
2mArms -- 5mArms		2 μArms		
5mArms -- 10mArms		5 μArms		
10mArms -- 20mArms		10μArms		
20mArms -- 50mArms		20μArms		
50mArms--100mArms		50μArms		
Rdc test	Voltage range	100mV — 2V		
	Resolution	100μV		
	Current range	0mA— 20mA		
	Resolution	1μA		
DC Bias	Voltage range	0V — ± 10V	0V — ± 40V	0V — ± 10V
	Resolution	0V -- 5V	100μV	
		5V -- 10V	1mV	
		10V -- 20V	2mV	
		20V -- 40V	5mV	
	Current range	0mA— ± 100mA		
	Resolution	0 A -- 50mA	1μA	
50mA -- 100mA		10μA		
Voltage source	Voltage range	-----	-10V -- 10V	-----
	Resolution	-----	1mV	-----
	Current range	-----	-45mA -- +45mA	-----
	Output impedance	-----	100Ω	-----
Display				
Dimensions /typ		7-inch (diagonal)TFT LCD display		
Proportion		16:9		
Resolution		800×RGB×480		
Test function				

Component Parameter Test Instruments

I. TH2838 Series Precision LCR Meter

Test parameter	Cp-D, Cp-Q, Cp-G, Cp-Rp Cs-D, Cs-Q, Cs-Rs Lp-D, Lp-Q, Lp-G, Lp-Rp, Lp-Rdc Ls-D, Ls-Q, Ls-Rs, Ls-Rdc, Rdc R-X, Z- θ d, Z- θ r G-B, Y- θ d, Y- θ r Vdc-Idc							
Mathematics function	A(X+B)+C, X is test parameter, A, B, C is input parameter							
Equivalent circuit	Series, parallel							
Deviation measurement	Absolute deviation Δ compared with the nominal value Percentage deviation $\Delta\%$ compared with the nominal value							
Calibration function	OPEN, SHORT, LOAD							
Range selection	AUTO, HOLD							
Range	LCR	100m Ω , 1 Ω , 10 Ω , 20 Ω , 50 Ω , 100 Ω , 200 Ω , 500 Ω , 1k Ω , 2k Ω , 5k Ω , 10k Ω , 20k Ω , 50k Ω , 100k Ω , total 15 ranges						
	Rdc	1 Ω , 10 Ω , 20 Ω , 50 Ω , 100 Ω , 200 Ω , 500 Ω , 1k Ω , 2k Ω , 5k Ω , 10k Ω , 20k Ω , 50k Ω , 100k Ω , total 15 ranges						
Trigger mode	INT, MAN, EXT, BUS							
Trigger delay	0 s -- 999 s, resolution 100us							
Test terminal configuration	Four-pair							
Test cable length	0m, 1m							
Test average	1-255 times							
Test time (ms)	Speed mode	20Hz	100Hz	1kHz	10kHz	100kHz	1MHz	2MHz
	FAST	330	100	20	7.7	5.7	5.6	5.6
	MED	380	180	110	92	89	88	88
	LONG	480	300	240	230	220	220	220
Test display range	a 1×10^{-18} ; E 1×10^{18}							
Cs, Cp	± 1.000000 aF -- 999.9999 EF							
Ls, Lp	± 1.000000 aH -- 999.9999 EH							
D	± 0.000001 -- 9.999999							
Q	± 0.01 -- 99999.99							
R, Rs, Rp, X, Z, Rdc	± 1.000000 a Ω -- 999.9999 E Ω							
G, B, Y	± 1.000000 aS -- 999.9999 ES							
Vdc	± 1.000000 aV -- 999.9999 EV							
Idc	± 1.000000 aA -- 999.9999 EA							
θ r	± 1.000000 a rad -- 3.141593 rad							
θ d	± 0.0001 deg -- 180.0000 deg							
$\Delta\%$	$\pm 0.0001\%$ -- 999.9999%							
t	-99.99 $^{\circ}$ C -- 1000.00 $^{\circ}$ C							
Turn Ratio (extension pending)	± 0.000000 -- 1000.000							
Basic test accuracy	0.05% (the details refer to the instruction)							
List sweep								
Sweep points	Up to 201 points							
Sweep Parameters	Test frequency, AC voltage, AC current, DC BIAS voltage, DC BIAS current							
Trigger mode	SEQ	Once triggered, test at the sweep points. /EOM/INDEX will be output one time.						
	STEP	Once triggered, test at one sweep point. /EOM/INDEX will be output at each point, but the list sweep comparator results only be output at the last /EOM.						

Component Parameter Test Instruments

I. TH2838 Series Precision LCR Meter

List sweep comparator	Set one pair of lower limit and upper limit for each sweep point. Optional: judge through the first sweep parameter / judge through the second sweep parameter / not used in each limit.	
List sweep time tag	In SEQ mode, set the trigger point to 0, by defining the time, the test start time can be recorded at each measurement point.	
Graph sweep analysis		
Sweep points	51, 101, 201, 401 or 801	-----
Sweep trace	Primary or secondary parameters	-----
Display range	AUTO, HOLD	-----
Coordinate scale	Logarithm, linearity	-----
Sweep parameters	Test frequency, ACV, ACI, DCV BIAS/DCI BIAS, DC voltage source	-----
Sweep result display	Maximum value/ minimum value of primary/secondary parameter, primary/secondary value of the setting point	-----
Sweep graph storage	Sweep graphs can be saved to the interior FLASH, external USB storage or uploaded to the upper computer.	-----
Comparator		
Bin sorting	Primary parameter	9 BIN, OUT_OF_BINS, AUX_BIN, LOW_C_REJECT
	Secondary parameter	HIGH, IN, LOW
Bin limit setup	Absolute value, deviation value, percentage deviation value	
Bin count	0 -- 999999	
PASS/FAIL indication	When the primary parameter is one of the 9 BINS and the secondary parameter is IN, the PASS light on the front panel is ON, or FAIL light is ON.	
Test auxiliary function		
Data buffer storage function	201 test results can be read in batches	
Storage/Calling function	100 groups of test setting files in the internal nonvolatile memory 0--99 100 groups of test setting files in the USB storage 0—99	
Keyboard lockout function	Front panel keys can be locked	
USB HOST port	Universal Serial Bus socket, A class; FAT16/FAT32 format. USB flash disk storage or barcode scanning	
USB DEVICE port	Universal Serial Bus socket, small size B class (4 contact position); Correspond to USBTMC-USB488 and USB 2.0 The female joint is used for connecting the external control unit.	
LAN	10/100BaseT Ethernet, 8pins, two selectable speed mode	
HANDLER interface	Be used for bin sorting signal output	
External DC BIAS control	Control TH1778A/TH1778AS Bias current source, at most 1 set of TH1778+5 sets of TH1778S (120A MAX)	
RS232		
GPIO (option)	24 pin D-Sub port (D-24 class), the female joint is compatible with IEEE488.1, 2 and SCPI.	

Standard Accessories

Three core power cord	TH26010	Gold-plated short circuit board	TH26011BS	4 terminal pair Kelvin test clip leads
			TH26005C	Four-terminal test fixture

Options

TH26108C	Four-terminal-pair patch test fixture	TH26008A	SMD component test fixture
TH26007A	Magnetic ring test fixture	TH26009B	SMD Kelvin test tweezers
TH26047	Four-terminal test fixture	TH26048	Four-terminal test fixture
TH26063	Four-terminal test fixture	TH26062A	Four-terminal test fixture
TH2838-GPIB	GPIB Interface board	TH26033	GPIB Control cable

Component Parameter Test Instruments

I. TH2826/TH2826A LCR Meter

Features

- The first LCR meter with LXI standard in China.
- Test frequency:20Hz-5MHz with the resolution of 10mHz
- Test level:10mV-5V with the resolution of 1mV
- Basic accuracy:0.1%
- The highest test speed up to 200 times/s.
- 320×240 dot-matrix large graphic LCD display
- 5-digit display resolution
- 22 parameter combinations available
- 4 signal source output impedance
- 10 points list sweep function
- Built-in DC bias source
- Auto level control (ALC) function of voltage or current
- V,I test signal level monitor function
- Graphic scanning and analyzing function
- 20 groups of setting for storage/load
- Built-in comparator, 10-bins and bin counters
- Multiple communication interfaces
- 2m/4m cable length extension(Optional)
- Optional Chinese and English language operating interface

Applications

■ Passive component:

Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components

■ Semiconductor component

Parasitic parameter test and analysis of LED driver integrated circuit C-VDC features of varactors

Parasitic parameter analysis of transistors or integrated circuit

■ Other components

Impedance assessment of printed circuit boards, relays, switches, cables, batteries



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH2826/TH2826A

Dimension (mm): 400(W) x 132(H) x 385(D)

Net weight : 9.3kg

■ Dielectric material

Dielectric constant and loss angle evaluation of plastics, ceramics and other materials

■ Magnetic materials

Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials

■ Semiconductor materials

Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials

■ Liquid crystal cell

Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Measurement Parameters	C, L, R,Z,Y,X,B, G, D, Q, θ ,DCR	
Test frequency	TH2826	20Hz-5MHz,with the resolution of 10mHz
	TH2826A	20Hz-2MHz,with the resolution of 10mHz
Test Level	f \leq 1MHz	10mV-5V, \pm (10%+10mV)
	f>1MHz	10mV-1V, \pm (20%+10mV)
Output impedance	10 Ω , 30 Ω , 50 Ω , 100 Ω	
Basic Accuracy	0.1%	
Display Range	L	0.0001 uH - 9.9999kH
	C	0.0001 pF - 9.9999F
	R,X,Z,DCR	0.0001 Ω - 99.999 M Ω
	Y, B, G	0.0001 nS - 99.999 S
	D	0.0001 - 9.9999
	Q	0.0001 - 99999
	θ	-179.99° - 179.99°
Measuring Speed (meas/sec)	Fast: 200(f > 30kHz),100(f > 1kHz); Med: 25, Slow: 5	
Calibration function	Open/Shot /load	
Equivalent mode	Serial,Parallel	
Ranging Mode	Auto and Hold	
Display Mode	Direct, ABS, Rel	
Trigger Mode	Internal,Manual,External,BUS	
Internal DC bias source	Voltage mode	-5V - +5V, \pm (10%+10mV), with the resolution of 1mV
	Current mode (internal resistance is 50 Ω)	-100mA - +100mA, \pm (10%+0.2mA),with the resolution of 20uA
Comparator function	10 bins and bin counters	
Display	320×240 dot-matrix LCD display	
Memory	20 groups of control settings can be saved	
Interface	USB DEVICE(USBTMC and USB CDC support), USB HOST(FAT16 and FAT32 support), LAN(LXI class C support), RS232C,HANDLER,GPIB(option)	

Standard Accessories

TH26048	4 terminal test fixture
TH26011B	4 terminal Kelvin test clip leads
TH26010	Gilded shorting plate

Options

TH26008A	SMD component test fixture
TH26009B	SMD test tweezers
TH10001	GPIB interface

Component Parameter Test Instruments

I. TH2829 Series of Automatic Component Analyzer

Features

- 800×RGB×480 7-inch TFT LCD display
- Basic accuracy: 0.05%
- Test signal frequency of 1MHz, resolution of 1mHz, 5-digit frequency input
- Strongest signal source selection:
 - 10V/100mA programmable AC test level
 - 10V/100mA programmable DC bias supply
 - 10V/50mA standalone DC voltage source
 - 1A/2A interior DC bias current source (optional)
 - 120A external bias source (optional)
- Maximum test speed: 9ms/time
- Simultaneous display of 4 kinds of test parameters
- 201-point list sweep function
- Continuous curve scanning/graphical analysis function
- Internal storage of 100 sets of LCRZ setting files and 10 sets of GIF image
- GIF image and CSV data files can be saved to USB storage directly
- HANDLER, USB, LAN, RS232C, GPIB (option), DCI interface

Applications

- **Passive component:**
Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components
- **Semiconductor component**
Parasitic parameter test and analysis of LED driver integrated circuit
C-VDC features of varactors
Parasitic parameter analysis of transistors or integrated circuit
- **Other components**
Impedance assessment of printed circuit boards, relays, switches, cables, batteries



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH2829A/TH2829C

Dimension (mm): 400(W) x 132(H) x 385(D)
Net weight : 13kg

- **Dielectric material**
Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
- **Magnetic materials**
Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials
- **Semiconductor materials**
Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials
- **Liquid crystal cell**
Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Specifications

Display	800×RGB×480 7-inch TFT LCD display		
Frequency of test signal	TH2829A	20Hz—300kHz	
	TH2829C	20Hz—1MHz	
	Minimum resolution	1mHz, 5-digit frequency input	
	Accuracy	0.01%	
AC Level	Voltage range of test signal		
	5mV—10Vrms		
	Minimum resolution of voltage		
	100μV, 3-digit input		
	Accuracy	ALC ON	10% x set voltage + 2mV
		ALC OFF	6% x set voltage + 2mV
DC bias voltage source	Current range of test signal		
	50μA—100mA		
	Minimum resolution of current		
	1μA, 3-digit input		
Accuracy	ALC ON	10% x set current + 20μA	
	ALC OFF	6% x set voltage + 20μA	
DC bias voltage source	Voltage/Current range		
	0V—±10V / 0mA—±100mA		
	Resolution		
	0.5mV / 5μA		
Voltage accuracy		1% x set voltage + 5mV	
ISO ON		Be used for the bias test of inductance and transformer	
AC Source impedance	ISO ON	100Ω	
	ISO OFF	30Ω, 50Ω, 100Ωselectable	
DCR Source impedance		30Ω, 50Ω, 100Ωselectable	
DC Independent voltage source	Voltage/current range		
	0V—±10V / 0mA—±50mA		
	Resolution		
	0.5mV / 5μA		
Voltage accuracy		1% x set voltage + 5mV	
Output resistance		100Ω	
Test parameters of LCR			
Z , Y , C, L, X, B, R, G, D, Q, θ, DCR, Vdc-Idc			
Parameter display of test page			
Two sets of main/sub parameters, the second set can be set as ON/OFF; There can be 10 pages of list sweep and 15 points per page at most; Multiple parameters continuous sweep graphical analysis.			

Component Parameter Test Instruments

I. TH2829 Series of Automatic Component Analyzer

Basic accuracy	LCR test parameter	0.05%
	Calibration	Warm-up time ≥ 30 seconds; Environment temperature: $23 \pm 5^\circ\text{C}$; Signal voltage: 0.3Vrms-1Vrms ; Zeroing: After OPEN or SHORT; Length of test cable: 0 m
Measurement time (≥ 10 kHz)		Fast: 9 ms / time ; Medium: 67 ms / time; Slow:187 ms / time Plus the refresh time of display character
Display range of LCR parameter	Z ,R, X,DCR	0.00001 Ω — 99.9999M Ω
	Y ,G,B	0.00001 μs — 99.9999s
	C	0.00001pF — 9.99999F
	L	0.00001 μH — 99.9999kH
	D	0.00001 — 9.99999
	Q	0.00001 — 99999.9
	$\theta(\text{DEG})$	-179.999° — 179.999°
	$\theta(\text{RAD})$	-3.14159 — 3.14159
$\Delta\%$		-999.999% — 999.999%
Equivalent circuit		Serial, Parallel
Range mode		Auto, Hold
Trigger mode		Internal, Manual, External, Bus
Average times		1-256
Calibration function		Open, short calibration with full frequency or dot frequency, Load
Math operation		Direct reading, ΔABS , $\Delta\%$
Delay time setup		0-999, minimum resolution: 100us
Comparator	10-bin sorting, BIN1-BIN9, NG, AUX	
	Bin counter PASS/FAIL on front panel, LED indication	
List sweep	<ul style="list-style-type: none"> ·201 -point list sweep function ·List sweep of frequency, AC voltage/current, internal/external DC bias voltage/current and independent DC source voltage can be performed on each page. Each sweep point can be sorted separately. 	
Graphical analysis	<ul style="list-style-type: none"> ·Graph scanning and analysis of frequency, AC level and DC bias can be performed. ·Set the sweep start point, end point and each sweep point. ·Display the maximum value, minimum value and read any of the chosen sweep point ·Scanning graphs can be stored into internal or external USB memory. 	
Internal nonvolatile memory	100 sets of LCRZ setting files memory, 201 times test results, 10 sets of GIF image, CSV data files	
External USB memory	<ul style="list-style-type: none"> ·GIF image, CSV data files ·LCRZ setting files memory ·Test data can be stored via USB memory directly. 	
Interface	1A bias current source	1A DC bias current source (optional) can be stalled
	I/O interface	HANDLER on rear panel
	SCI	USB, RS232C
	PCI	GPIB(optional)
	NI	LAN
Memory interface		USB HOST(front panel)
General Specifications		
Operating temperature and humidity		$0^\circ\text{C} - 40^\circ\text{C}$, $\leq 90\%\text{RH}$
Power supply	Voltage	99V – 121V, 198V – 242V AC
	Frequency	47Hz – 63Hz
Consumption		Max. 80 VA
Dimension(W×H×D)		400mm × 132mm × 385mm
Weight		Approx.13 kg

Standard Accessories

Three core power cord

TH26010 Gold-plated short circuit board

TH26011AS 4 terminal pair Kelvin test clip leads(only TH2829A)

TH26011BS 4 terminal pair Kelvin test clip leads(only TH2829C)

TH26048 Four-terminal test fixture

Component Parameter Test Instruments

I. TH2827 Series of Precision LCR Meter

Features

- 4.3-inch TFT LCD display
- Selectable Chinese and English operation interfaces
- Maximum test frequency of 1MHz, resolution of 10mHz
- Transformer parameter test function
- Maximum test speed: 13ms/time
- Automatic level control (ALC) function for V and I
- Test signal level monitor function for V and I
- Included interior DC bias source
- External DC bias source of large current
- 10-point list sweep function
- Selectable internal resistance of 30Ω, 50Ω and 100Ω
- Built-in comparator:10-bin sorting and bin counter
- Internal file storage and external USB-disk file storage
- Test data can be saved to USB-disk directly
- RS232C, USB, LAN, HANDLER, GPIB, DCI interface

Applications

- **Passive component:**
Impedance parameter estimation and performance analysis of capacitor, inductor, magnetic core, resistor, piezoelectric devices, transformers, chip components and network components
- **Semiconductor component**
Parasitic parameter test and analysis of LED driver integrated circuit
C-VDC features of varactors
Parasitic parameter analysis of transistors or integrated circuit
- **Other components**
Impedance assessment of printed circuit boards, relays, switches, cables, batteries

Specifications

Display	800×RGB×480 4.3-inch TFT LCD display		
Frequency of test signal	TH2827A	20Hz—300kHz	
	TH2827C	20Hz—1MHz	
	Minimum resolution	10mHz, 4-digit frequency input	
	Accuracy	0.01%	
AC Level	Voltage range of test signal		
	5mV—2Vrms		
	Minimum resolution of voltage		
	100μV, 3-digit input		
	Accuracy	ALC ON	10% x set voltage + 2mV
		ALC OFF	6% x set voltage + 2mV
Current range of test signal			
100μA—20mA			
Minimum resolution of current			
1μA, 3-digit input			
Accuracy	ALC ON	10% x set current + 20μA	
	ALC OFF	6% x set voltage + 20μA	
DC bias voltage source	Voltage/Current range		
	0V— ±5V / 0mA—±50mA		
	Resolution		
	0.5mV / 5μA		
Voltage accuracy			
1% x set voltage + 5mV			
ISO ON			
Be used for the bias test of inductance and transformer			
AC Source impedance	ISO ON	100Ω	
	ISO OFF	30Ω, 50Ω, 100Ω selectable	
DCR source impedance	30Ω, 50Ω, 100Ω selectable		
Test parameters of LCR	Z , Y , C, L, X, B, R, G, D, Q, θ, DCR, Vdc-Idc		
Parameter display of test page	One set of main/sub parameter, 10-point list sweep		
Test parameters of transformer	DCR1(primary, 2-terminal), DCR2(secondary, 2-terminal), M (mutual inductance), N, 1/N,Phase, Lk(leakage inductance), C(primary, secondary capacitance),		



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH2827A/TH2827C

Rack mount (mm): 320(W) x 88(H) x 370(D)
Dimension (mm): 369(W) x 108(H) x 408(D)
Net weight: 5kg

- **Dielectric material**
Dielectric constant and loss angle evaluation of plastics, ceramics and other materials
- **Magnetic materials**
Magnetic permeability and loss angle assessment of ferrite, amorphous body and other magnetic materials
- **Semiconductor materials**
Dielectric constant, electrical conductivity and C-V characteristics of semiconductor materials
- **Liquid crystal cell**
Dielectric constant, elastic constant and C-V characteristics of liquid crystal cell

Component Parameter Test Instruments

I. TH2827 Series of Precision LCR Meter

Basic accuracy	LCR test parameter	0.05%
	N	0.1%
	Calibration	Warm-up time ≥ 30 seconds; Environment temperature: $23 \pm 5^\circ\text{C}$; Signal voltage: $0.3V_{\text{rms}}-1V_{\text{rms}}$; Zeroing: After OPEN or SHORT; Length of test cable: 0 m
Measurement time (≥ 10 kHz)		Fast: 13 ms / time , Medium: 67 ms / time , Slow: 187 ms / time Plus the refresh time of display character
Display range of LCR parameter	Z ,R, X, DCR	0.00001 Ω — 99.9999M Ω
	Y ,G,B	0.00001 μs — 99.9999s
	C	0.00001pF — 9.99999F
	L	0.00001 μH — 99.9999kH
	D	0.00001 — 9.99999
	Q	0.00001 — 99999.9
	θ (DEG)	-179.999 $^\circ$ — 179.999 $^\circ$
	θ (RAD)	-3.14159 — 3.14159
$\Delta\%$	-999.999% — 999.999%	
Equivalent circuit		Serial, Parallel
Range mode		Auto, Hold
Trigger mode		Internal, Manual, External, Bus
Average times		1-255
Calibration function		Open, short calibration with full frequency or dot frequency, Load
Math operation		Direct reading, ΔABS , $\Delta\%$
Delay time setup		0-999, minimum resolution: 100us
Comparator	10-bin sorting, BIN1-BIN9, NG, AUX	
	Bin counter	
	PASS/FAIL on front panel, LED indication	
List sweep		·201 points list sweep ·Frequency, AC voltage/current, internal/external bias voltage/ current can be swept. ·Each sweep point can be sorted separately.
Internal nonvolatile memory		40 sets of LCRZ setting files
External USB memory		GIF files, LCRZ setting files, Test data can be stored via USB memory directly.
Interface	I/O interface	HANDLER on rear panel
	SCI	USB, RS232C
	PCI	GPIB (optional)
	NI	LAN
	Memory interface	USB HOST (front panel)
General Specifications		
Operating temperature and humidity		$0^\circ\text{C} - 40^\circ\text{C}$, $\leq 90\%\text{RH}$
Power supply	Voltage	99V-121V, 198V-242V AC
	Frequency	47Hz-63Hz
Consumption		Max. 80 VA
Dimension(W×H×D)		320 mm × 88 mm × 370 mm (with no sheath) 369 mm × 108 mm × 408 mm (with sheath)
Weight		Approx. 5 kg

Standard Accessories

Three core power cord

TH26010 Gold-plated short circuit board

TH26011AS 4 terminal pair Kelvin test clip leads(only TH2827A)

TH26011BS 4 terminal pair Kelvin test clip leads(only TH2827C)

TH26048 Four-terminal test fixture

TH26038 Four-terminal test fixture

Component Parameter Test Instruments

I. TH283X Series Compact LCR Meter

Features

- Low cost, high performance, small size
 - 4.3 inch TFT LCD Display
 - Soft power switch
 - Selectable Chinese-English operation language
 - Max. 200kHz test frequency
 - Max. 6 digit reading resolution
 - 10mVrms-2.0Vrms programmable signal level,
built-in 0 - ± 5V/50mA bias source
 - DCR, 50mV-2V programmable test level, resolution 10μΩ
 - Ls-Rd / Lp-Rd Function (L, Rd display simultaneously) *
 - Highest test speed 13ms/time
 - Selectable 30Ω/100Ω signal source impedance
 - V/I monitor and auto level adjustment function
 - Built-in comparator, 10 bins sorting and count function
 - File storage and firmware update through U disk
 - RS232, RS485, USB, HANDLER, GPIB interface
- * Rd means DCR.



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard
GPIB	RS485	SCANNER	
option	option	option	

TH283X Series

Rack mount (mm): 215(W) x 88(H) x 335(D)
 Dimension (mm): 235(W) x 105(H) x 360(D)
 Net weight: 3.6 kg

Applications

- Passive components:
 Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components

- Other components:
 Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Specifications

Model		TH2830	TH2832
Basic measurement accuracy (See details in technical specification)	LCRZ	0.05%	0.05%
	DCR	0.1%	
	Calibration condition	Warm up time: ≥ 30 minutes ; Environment temperature: 23±5°C Signal level: 1Vrms ; Corretion: after OPEN, SHORT Testing cable length: 0 m	
Test signal frequency		20Hz-100kHz , Continuous	20Hz-200kHz, Continuous
Signal source output impedance		Selectable 30Ω, 100Ω, ±1% @1kHz	
AC test signal level	Normal	10mV—2Vrms	
		Resolution: 10mV, Accuracy: 10% x setting voltage+2mV	
	Constant level (ALC ON)	100μA—20mArms	
		Resolution: 0.1mA	
DCR test signal level	1V DC		20mV—1Vrms
	-----		Resolution: 10mV , Accuracy: 10%
			200μA—10mArms
			Resolution: 0.1mA
			50mV—2V DC
			Resolution: 0.5mV

Component Parameter Test Instruments

I. TH283X Series Compact LCR Meter

DC bias voltage source	-----	0V— ± 5V																		
	-----	Resolution: 0.5mV, Accuracy: 1%																		
	-----	0mA—± 50mA																		
	-----	Resolution: 0.5μA																		
Test parameters	Z , Y , C, L, X, B, R, G, D, Q, θ, DCR																			
DCR display range	0.00001 Ω – 99.9999 MΩ																			
LCR parameters display range	<table border="0"> <tr> <td> Z , R, X</td> <td>0.00001Ω — 99.9999MΩ</td> </tr> <tr> <td> Y , G, B</td> <td>0.00001μs — 99.9999s</td> </tr> <tr> <td>C</td> <td>0.00001pF — 9.99999F</td> </tr> <tr> <td>L</td> <td>0.00001μH — 99.9999kH</td> </tr> <tr> <td>D</td> <td>0.00001 — 9.99999</td> </tr> <tr> <td>Q</td> <td>0.00001 — 99999.9</td> </tr> <tr> <td>θ(DEG)</td> <td>-179.999° — 179.999°</td> </tr> <tr> <td>θ(RAD)</td> <td>-3.14159 — 3.14159</td> </tr> <tr> <td>Δ%</td> <td>-999.999% — 999.999%</td> </tr> </table>		Z , R, X	0.00001Ω — 99.9999MΩ	Y , G, B	0.00001μs — 99.9999s	C	0.00001pF — 9.99999F	L	0.00001μH — 99.9999kH	D	0.00001 — 9.99999	Q	0.00001 — 99999.9	θ(DEG)	-179.999° — 179.999°	θ(RAD)	-3.14159 — 3.14159	Δ%	-999.999% — 999.999%
Z , R, X	0.00001Ω — 99.9999MΩ																			
Y , G, B	0.00001μs — 99.9999s																			
C	0.00001pF — 9.99999F																			
L	0.00001μH — 99.9999kH																			
D	0.00001 — 9.99999																			
Q	0.00001 — 99999.9																			
θ(DEG)	-179.999° — 179.999°																			
θ(RAD)	-3.14159 — 3.14159																			
Δ%	-999.999% — 999.999%																			
Display digits	6	6																		
Measurement time (≥10 kHz)	Fast: 75 meas/sec(13ms), Medium:11 meas/sec(90 ms), Slow: 2.7meas/sec(370 ms)																			
Equivalent circuit	Serial, Parallel																			
Range mode	Auto, Hold																			
Trigger mode	Internal, Manual, External, Bus																			
Average time	1–255																			
Correction	Open, Short, Load																			
Math operation	Direct reading, ΔABS, Δ%																			
Trigger delay time setting	0 - 60.000s, 1ms steps																			
Step delay time setting	0 - 60.000s, 1ms steps																			
List Sweep	<ul style="list-style-type: none"> ·10 points list sweep ·Frequency, AC voltage/current, internal/ external bias voltage/ current can be swept. ·Each sweep point can be sorted separately. 																			
Comparator function	10 bins, BIN1–BIN9, NG, AUX																			
	Bin count function																			
	PASS, FAIL LED display on front panel																			
Built-in Storage	Internal 100 LCRZ instrument setting files, 201 times test results																			
USB Storage	Instrument setting files , measurement result CSV files, printed screen (GIF format)																			
Interface	Control interface	HANDLER																		
	Communication interface	USB HOST, RS232C, RS485(option), GPIB(option)																		
	Storage interface	USB DEVICE (U-disk storage)																		

Standard Accessories

Three core power cord

TH26010 Gold-plated short circuit board

TH26011CS 4 terminal pair Kelvin test clip leads

TH26048A Four-terminal test fixture

Component Parameter Test Instruments

I. TH2816A/TH2816B/TH2817A Precision LCR Meter



Features

- 240×64 dot-matrix graphics LCD display
- Friendly user's interface and easy operation
- TH2816A: Over 12,000 frequency points available from 50Hz to 200kHz
- TH2816B: 37 typical frequency points
- TH2817A: 16 typical frequency points available from 50Hz to 100kHz
- Programmable single-voltage level from 10mVrms to 2.0Vrms
- High stability and accuracy
- 6 digit readout resolution
- Up to 30meas/sec measurement rate
- Precision LOAD correction function
- Selectable signal source output impedances: 30Ω, 100Ω
- List sweep function for up to 4 frequencies, signal levels and DC bias levels
- Direct, Δ ABS and Δ% display modes
- 12 control setting files memory
- Built-in comparator, 10 Bins and bin counters (TH2816A/B)
- Built-in comparator, 4 Bins and bin counters(TH2817A)
- Test signal level monitor function
- Key lock function
- Handler interface
- RS-232C and optional GPIB interfaces



RS232	HANDER	GPIB
standard	standard	option

TH2816A/TH2816B/TH2817A

Dimension (mm): 350(W) x 122(H) x425(D)
Net weight: 4.8 kg

Applications

- Passive components:
Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Specifications

Measurement function		
Test parameter	Z , C, L, X, B, R, G, D, Q, θ	
Basic accuracy	TH2816A	0.05%
	TH2817A	
	TH2816B	0.1%
Equivalent circuit	Series and Parallel	
Math function	Deviation and Percent Deviation	
Ranging mode	Auto, Hold	
Trigger mode	Internal, Manual, External and Bus	
Measuring speed	Slow: 1.5meas/sec Med: 10meas/sec Fast: 30meas/sec	
Correction function	Open, Short and Load corrections	
Measurement terminal	5 terminals	
Averaging rate	1—255, TH2816A/TH2817A only	
Delay time	0—60sec, with step of 1ms	

Component Parameter Test Instruments

I. TH2816A/TH2816B/TH2817A Precision LCR Meter

List sweep	List sweep for up to 4 frequencies, signal levels and DC bias levels	
Display Mode	Direct, Δ ABS, $\Delta\%$, V/I(V/I monitor), Bin number and bin counter	
Display	240×64 dot-matrix LCD display, 6-digit resolution	
Test signal		
Signal frequency	TH2816A	50Hz to 200kHz , over 12,000 points
	TH2816B	50Hz to 200kHz , total 37 points
		50Hz, 60Hz, 80Hz, 100Hz, 120Hz, 150Hz, 200Hz, 250Hz, 300Hz, 400Hz, 500Hz, 600Hz, 800Hz, 1kHz, 1.2kHz, 1.5kHz, 2kHz, 2.5kHz, 3kHz, 4kHz, 5kHz, 6kHz, 8kHz, 10kHz, 12kHz, 15kHz, 20kHz, 25kHz, 30kHz, 40kHz, 50kHz, 60kHz, 80kHz, 100kHz, 120kHz, 150kHz, 200kHz
TH2817A	from 50Hz to 100kHz: 50Hz, 60Hz, 100Hz, 120Hz, 200Hz, 400Hz, 500Hz, 1kHz, 2kHz, 4kHz, 5kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz , 16 points	
Output impedance	30 Ω , 100 Ω	
Test level	10mVrms to 2.0Vrms, 10mV steps	
Measurement display range		
Z , R,X	0.00001 Ω — 99.9999M Ω	
C	0.00001pF — 999.999mF	
L	0.00001 μ H — 9.99999kH	
G,B	0.00001 μ S — 999.999S	
D	0.00001 — 9.99999	
Q	0.00001 — 99999.9	
θ (DEG)	-179.999° — 179.999°	
θ (RAD)	-3.14159 — 3.14159	
$\Delta\%$	-999.999% — 999.999%	
Comparator, memory & interface		
Comparator Function	TH2816A	10 Bins(BIN1 to BIN9 , OUT of bins), and additional AUX bin
	TH2816B	
	TH2817A	4 bins(BIN1 to BIN3, OUT of bins), and additional AUX bin
Memory	12 control settings memory for store/recall	
Interface	RS-232C, HANDLER(Optional For TH2816B), GPIB (Optional)	

Ordering Information

TH2816A Precision LCR Meter
 TH2816B LCR Meter
 TH2817A Precision LCR Meter

Standard Accessories

TH26005A 4 terminal test fixture
 TH26011A 4 terminal Kelvin test clip leads
 TH26010 Gilded shorting plate

Options

TH26047 4 terminal test fixture
 TH26048 4 terminal test fixture
 TH26006 Axial component test fixture
 TH26007A Core inductor test fixture
 TH26008A SMD component test fixture
 TH26009B SMD Kelvin test tweezers
 TH26033 GPIB interface cable
 TH26034 RS232C interface cable
 TH10001 GPIB interface board
 TH12003 RS232C control software(TH2816A)
 TH12004 RS232C control software(TH2817A)

Component Parameter Test Instruments

I. TH2817B+ LCR Meter

Features

- Test frequency 50Hz,60Hz,100Hz,120Hz,1kHz,10kHz,20kHz,40kHz,50kHz,100kHz, total 10 points
- 4.3 inch TFT liquid crystal display
- 50Hz-100kHz, 10 typical test frequencies
- 6-digit reading resolution
- Maximum test speed:12.5ms, support low frequency and high speed:TX4+3ms
- Chinese and English optional operation interface
- 10 bins sorting, test sorting is more perfect
- 100 sets of LCRZ instrument setting files, 10 measurements
- Soft power switch
- Support 110V/220V two power supply voltages
- 10-point list scanning, support multi-frequency test sorting
- Ultra-low signal source output offset (<100 μ V), meeting the needs of large inductor, common mode choke inductor test
- Super impact protection
- Power on state lock button;
- Empty fixture judgment
- Data logging function
- Screen capture function
- Interface function, timing, trigger delay, etc. are more complete



RS232/RS485(option)	HANDLER	USB HOST	USB DEVICE
standard	standard	standard	standard

TH2817B+(TH2817B Upgraded) Support SCPI,MODBUS protocol
 Rack mount (mm): 215(W) x 88(H) x 335(D)
 Dimension (mm): 235(W) x 105(H) x360(D)
 Weight: 3.6kg

Applications

- **Passive components:**
 Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- **Other components:**
 Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Specifications

Model	TH2817B+	
Basic accuracy	0.1%	
Test frequency	50Hz,60Hz,100Hz,120Hz,1kHz,10kHz,20kHz,40kHz,50kHz,100kHz, total 10 points	
Test parameters	L,C,R,Z ,D,Q,X, θ d, θ r,Vm,Im, Δ %	
V/I monitor	Yes	
AC test signal level	0.1Vrms,0.3Vrms,1Vrms	
Test terminal configuration	5-terminal	
Test speed (ms/time)	Fast: 19ms;Medium:83ms;Slow: 333ms F \leq 120Hz Fast :4XT+3ms	
Zero clearing	Open, Short, Load	
List sweep	10-point list sweep Each scan point can be individually sorted, support multi-frequency combined test sorting Scanning test for frequency and AC voltage	
Equivalent Circuit	Series, Parallel	
Range mode	AUTO, HOLD	
Trigger mode	Internal, External, Manual, Bus	
Average times	1-255	
Arithmetical operation	Direct reading, Δ ABS, Δ %	
Delay	Trigger delay, step delay: 0—60.000s, 1ms step	
General function	Series, parallel equivalent mode, calibration: open circuit, short circuit, range selection: automatic, manual, trigger mode: INT, MAN, EXT, BUS, keyboard lock function	
Comparator	10 bins sorting,BIN1-BIN9,NG,AUX; Bin count function PASS, FALL front panel LED display	
Memory	Nonvolatile storage	100 sets of LCRZ instrument setting files
	USB Storage	Instrument setting files , measurement result CSV files
Interface	RS232/RS485(option),HANDLER,USB HOST,USB DEVICE	

Standard Accessories

- Three core power cord
- TH26048A 4-terminal test fixture
- TH26011CS 4-terminal Kelvin test cable
- TH26010 Gilded shorting plate

Component Parameter Test Instruments

I. TH2817C+ LCR Meter

Features

- Test frequency 50Hz,60Hz,100Hz,120Hz,1kHz,10kHz,20kHz,40kHz,50kHz,100kHz, total 10 points
- 4.3 inch TFT liquid crystal display
- 6-digit reading resolution
- Maximum test speed:12.5ms, support low frequency and high speed:TX4+3ms
- Chinese and English optional operation interface
- 10 bins sorting, test sorting is more perfect
- 100 sets of LCRZ instrument setting files, 10 measurements
- Soft power switch
- Support 110V/220V two power supply voltages
- Range configuration 3/10 times stepping configuration to ensure stable and reliable impedance full range test
- Ls-Rdc / Lp-Rdc function
- Ultra-low signal source output offset (<100 μ V), meeting the needs of large inductor, common mode choke inductor test
- Super impact protection
- Power on state lock button;
- Empty fixture judgment
- Data logging function
- Screen capture function
- Interface function, timing, trigger delay, etc. are more complete

Specifications

Model	TH2817C+	
Basic accuracy	0.1%	
Test frequency	50Hz,60Hz,100Hz,120Hz,1kHz,10kHz,20kHz,40kHz,50kHz,100kHz, total 10 points	
Test parameters	LCR	L, C, R, Z , D, Q, X, θ d, θ r, Vm, Im, Δ %
	Transformer	M, N, 1/N, L1/L2, DCR1/DCR2, C(primary-secondary), P(phase), Lk1/Lk2(leakage inductance)
	Balance test	L, R, Z, DCR
V/I monitor	Yes	
Test level	AC	0.1Vrms,0.3Vrms,1Vrms
	DC	\pm 1V
DC bias	-----	
Source impedance	10 Ω , 100 Ω optional	
Test terminal configuration	5-terminal	
Test speed (ms/time)	Fast: 19ms;Medium:83ms;Slow: 333ms	
Zero clearing	Open, Short, Load	
List sweep	10-point list sweep	
Equivalent Circuit	Series, Parallel	
Range mode	AUTO, HOLD	
Trigger mode	Internal, External, Manual, Bus	
Average times	1-255	
Arithmetical operation	Direct reading, Δ ABS, Δ %	
Delay	Trigger delay, step delay: 0—60.000s, 1ms step	
General function	Series, parallel equivalent mode, calibration: open circuit, short circuit, range selection: automatic, manual, trigger mode: INT, MAN, EXT, BUS, keyboard lock function	
Comparator	10 bins sorting,BIN1-BIN9,NG,AUX; Bin count function PASS, FALL front panel LED display	
Memory	Nonvolatile storage	100 sets of LCRZ instrument setting files
	USB Storage	Instrument setting files , measurement result CSV files
Interface	RS232/RS485(option),HANDLER,USB HOST,USB DEVICE	

Standard Accessories

Three core power cord

TH26049A test fixture

TH26048A 4-terminal test fixture



TH2817C+(TH2817C/CX Upgraded) Support SCPI,MODBUS protocol

Rack mount (mm): 215(W) x 88(H) x 335(D)

Dimension (mm): 235(W) x 105(H) x360(D)

Weight: 3.6kg

Applications

- Passive components:

Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components

- Other components:

Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Component Parameter Test Instruments

I. TH2810B+ LCR Meter

Features

- 100Hz,120Hz,1kHz,10kHz 4 typical test frequencies
- 4.3 inch TFT liquid crystal display, Chinese and English optional operation interface
- 6-digit reading resolution
- Maximum test speed:12.5ms, support low frequency and high speed:TX4+3ms
- 10 bins sorting, test sorting is more perfect
- 100 sets of LCRZ instrument setting files, 10 measurements
- Soft power switch
- Support 110V/220V two power supply voltages
- 10-point list sweep, support multi-frequency test sorting
- Ultra-low signal source output offset (<100 μ V), meeting the needs of large inductor, common mode choke inductor test
- Super impact protection
- Power on state lock button;
- Empty fixture judgment
- Data logging function
- Screen capture function
- Interface function, timing, trigger delay, etc. are more complete



RS232/RS485(option)	HANDER	USB HOST	USB DEVICE
standard	standard	standard	standard

TH2810B+(TH2810B Upgraded)

Support SCPI,MODBUS protocol
 Rack mount (mm): 215(W) x 88(H) x 335(D)
 Dimension (mm): 235(W) x 105(H) x360(D)
 Weight: 3.6kg

Applications

- Passive components:
 Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:
 Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Specifications

Model	TH2810B+
Basic accuracy	0.1%
Test frequency	100Hz,120Hz,1kHz,10kHz
Test parameters	L, C, R, Z , D, Q, X, θ_d , θ_r , Vm, Im, $\Delta\%$
V/I monitor	Yes
AC test signal level	0.1Vrms,0.3Vrms,1Vrms
Signal source internal resistance	10 Ω , 100 Ω
Test terminal configuration	5-terminal
Test speed (ms/time)	Fast: 19ms; Medium:83ms; Slow: 333ms F \leq 120Hz Fast :4XT+3ms
Zero clearing	Open, Short, Load
List sweep	·10-point list sweep ·Each scan point can be individually sorted, support multi-frequency combined test sorting ·Scanning test for frequency and AC voltage
Equivalent Circuit	Series, Parallel
Range mode	AUTO, HOLD
Trigger mode	Internal, External, Manual, Bus
Average times	1-255
Arithmetical operation	Direct reading, Δ ABS, $\Delta\%$
Delay	Trigger delay, step delay: 0—60.000s, 1ms step
General function	Series, parallel equivalent mode, calibration: open circuit, short circuit, range selection: automatic, manual, trigger mode: INT, MAN, EXT, BUS, keyboard lock function
Comparator	10 bins sorting,BIN1-BIN9,NG,AUX; Bin count function PASS, FAIL front panel LED display
Nonvolatile storage	100 sets of LCRZ instrument setting files, 10 test results
External USB storage	Instrument setting file, CSV data file

Standard Accessories

- Three core power cord
- TH26048A 4-terminal test fixture
- TH26011CS 4-terminal Kelvin test cable
- TH26010 Gilded shorting plate

Component Parameter Test Instruments

I. TH2810D LCR Meter

Features

- Large character LCD display with backlight
- Easy operation with strong functions
- SMT surface mount technic
- Fast measurement speed (80mS)
- Good Readout stability
- 2 signal source output impedance:30Ω, 100Ω
- 5 Bins comparator and HANDLER interface
- RS-232C interface
- Optional RS232C operation software

Applications

- Passive components:
Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.



RS232	HANDER
standard	standard

TH2810D

Dimension (mm): 310(W) x 108(H) x 375(D)
Weight: 3.7kg

Specifications

Model	TH2810D	
Measurement function		
Test Parameter	L-Q, C-D, R-Q, Z -Q	
Basic Accuracy	0.1%	
Equivalent circuit	Series, parallel	
Mathematical Functions	Deviation and Percent Deviation	
Range mode	Auto, Hold	
Trigger mode	Internal, Manual and External	
Measurement speed	Fast: 12, Med: 5.1, Slow: 2.5 (meas/sec)	
Correction Function	Open/Short multi-frequency Zeroing	
Measurement Terminals	Five Terminals	
Test Signal		
Test Frequency	100Hz, 120Hz, 1kHz, 10kHz, Accuracy 0.01%	
Output impedance	30Ω, 100Ω	
Signal level	0.1Vrms, 0.3Vrms, 1Vrms	
Measurement Display Range		
Z , R	0.1mΩ - 99.99MΩ	
C	100Hz/120Hz	1pF - 99999μ F
	1kHz	0.1pF - 9999.9μ F
	10kHz	0.01pF - 999.99μ F
L	100Hz/120Hz	1μH - 99999H
	1kHz	0.1μH - 9999.9H
	10kHz	0.01μH - 999.99H
D	0.0001 - 9.999	
Q	0.0001 - 9999	
Δ%	-999.99% - 999.99%	
Display		
Display Mode	Direct, Δ%, Δ ABS	
Display	Large character LCD with backlight	
Display digits	Primary and secondary display:5 digits	
Comparator and interface		
Comparator	NG, P1, P2, P3, AUX, 5 bins and alarm selectable	
Interface	RS232C, Handler	

Standard Accessories

TH26001A	4 terminal test fixture
TH26004-1	4 terminal Kelvin test clip leads
TH26010	Gilded shorting plate

Component Parameter Test Instruments

I. TH2822 Series Handheld LCR Meter

Features

- Max. Basic accuracy: 0.25%
- Maximum test signal frequency : 100kHz
- Selectable test signal level
- With DCR function
- Enhanced protection capability of input terminal impact
- 40000 counts for primary parameter, D/Q resolution 0.0001
- Typical ultra-low consumption: 25mA
- Innovatively compatible terminal configuration: 5-terminal test slot and 3-terminal rubber jack
- Intellectualized auto LCR function
- AC test speed up to 4 meas/sec (DCR: 3 meas/sec), fast automatic range switch design
- Constant 100Ω output impedance
- Percentage display and 4-tolerance comparator: 1/5/10/20%
- Battery charge in startup & shutdown
- Test terminal protection function
- Data-hold, Max./Min./Average value recording
- Real-time function configuration selection and working condition hold capacity
- Standard configuration Mini – USB communication interface and SCPI command set
- Free FastAccess PC communication software on our website
- Gorgeous dual-color cast shell

Brief Introduction

■ With its advanced impedance test technology, Tonghui has launched TH2822 series handheld LCR meters. This series currently possess the most powerful functions and outstanding performance in this industry comparable with bench LCR meters. Meanwhile it is the achievement of Tonghui after years of efforts and research in the passive-component testing field.

TH2822 series apply the ultra-low power consumption design and high density SMD assembly techniques and can simultaneously display primary and secondary parameters on a LCD display with backlight. The dual-color shell is gorgeously once shaped; and functions are easy to operate. The test frequency is up to 100 kHz, the readings of primary parameter 40,000 counts and the resolution of dissipation factor 0.0,001. Accurate and convenient measurements of passive-components can be achieved in different occasions for a long time. In order to meet different market demand, multiple signal level and DCR test function are increased on TH2822D/E. The test accuracy can reach 0.1%. With USB interface, TH2822 series can conveniently communicate with a PC and be remotely controlled by a PC. In order to satisfy the increasing test requirements for SMD and balance the different needs for performance and price, two types of 4-terminal Kelvin test tweezers: TH26009C and TH26029C are optional for users' choice.



Mini USB
standard

TH2822 series

Dimension (mm): 90(W) x 190(H) x 40(D)
Weight: 0.35kg

Applications

- Passive components:
Evaluation of Impedance Parameters for Capacitors, Inductors, Cores, Resistors, piezoelectric devices, Transformers, Chip Components, and Network Components
- Other components:
Impedance evaluation of printed circuit boards, relays, switches, cables, batteries, etc.

Component Parameter Test Instruments

I. TH2822 Series Handheld LCR Meter

Specifications

Model	TH2822A	TH2822C	TH2822D	TH2822E
Function				
Test Parameter	Primary parameters: L / C / R / Z Secondary parameters: D / Q / R / θ / ESR		Primary parameters: L / C / R / Z / DCR Secondary parameters: D / Q / R / θ / ESR	
Equivalent Circuit	Series and Parallel			
Parameter and Equivalent Mode	Hold, Auto			
Ranging Mode	Auto			
Measurement Terminals	3-terminal, 5-terminal			
Measuring Speed	4meas/sec, 1.5meas/sec			
DCR Measuring Speed	-----		3meas/sec	
Calibration Function	Open, short			
Comparator Function	1%, 5%, 10%, 20%		1%, 5%, 10%, 20%	
Input fuse	0.1A / 250V			
Interface	Mini-USB (virtual serial port)			
Test signal				
Test Frequency	100Hz, 120Hz, 1kHz, 10kHz,	100Hz, 120Hz, 1kHz, 10kHz, 100kHz	100Hz, 120Hz, 1kHz, 10kHz,	100Hz, 120Hz, 1kHz, 10kHz, 100kHz
Test Level	0.6Vrms		0.3 Vrms, 0.6 Vrms, 1 Vrms	
Output Resistance	100 Ω			
Display				
Display	LCD Primary-Secondary dual display, with backlight (TH2822 not available)			
Reading	Max. Primary parameters: 40,000 digits, secondary parameters D/Q Minimum resolution: 0.0001			
Basic accuracy	0.25%		0.1%	
Measuring Range				
L	0.00 μ H - 1000.0H	0.000 μ H - 1000.0H	0.00 μ H - 1000.0H	0.000 μ H - 1000.0H
C	0.00pF - 20.000mF	0.000pF - 20.000mF	0.00pF - 20.000mF	0.000pF - 20.000mF
Z/R	0.0000 Ω - 10.000M Ω			
DCR	-----	-----	0.0000 Ω - 20.000M Ω	
ESR	0.0000 Ω - 999.9 Ω			
D	0.0000 - 9.999			
Q	0.0000 - 9999			
θ	0.00°- \pm 180.0°			
Power Requirements				
Battery model	TH2822 / A : IEC 6LR61, 9V alkaline battery TH2822C/D/E : LH-200H7C, 8.4V Ni-MH 200mAH rechargeable battery			
AC power adapter	Input: 220V/50Hz, Output: 12V-15V(100 Ω Load)			
Standby Currant	Max.2 μ A	18 μ A	11 μ A	
Battery life	16 hours (typical) , new alkaline battery, with backlight off			
Auto power off	5min, 15min, 30min, 60min, OFF available; Factory Default : 5min			
Low voltage indicator	When battery voltage drops below 6.8V, low voltage indicator turns on.			

Standard Accessories

MINI USB Communication cable
 TH26028 AC power adapter
 TH26004F Two-terminal Test Cable
 TH26010B Gilded shorting plate

TH26027AS 4 terminal Kelvin test cable(not included in TH2822)
 TH26029C SMD Kelvin test cable(not included in TH2822/A)
 8.4V Rechargeable battery(not included in TH2822/A)
 Alkaline battery(only for TH2822/A)

Component Parameter Test Instruments

I. TH2638 / A / B / C Precision Capacitance Meter

Features

- 4.3 inch TFT LCD display
- Selectable Chinese and English operation interface
- Max. test frequency: 1MHz
- Highest test speed: 2.3ms/time
- Basic test accuracy : $\pm 0.07\%$
- Loss factor: ± 0.0005
- V, I test signal level monitor function
- Low impedance measurement, signal level compensation function
- Built-in 11-bin comparator
- Internal file storage and external U disk file storage
- Test data can be directly saved in U disk
- Screen shot can be saved in U disk
- Compatible with SCPI commands
- RS232C, USB CDC, LAN, HANDLER, GPIB interfaces
- Manipulator interface and scanner interface
- Contact inspection function
- Synchronizing signal source
- Offset function in 1MHz test frequency (± 1 , $\pm 2\%$)



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

TH2638/A

Rack mount (mm): 280(W) x 88(H) x 370(D)

Dimension (mm): 369(W) x 108(H) x 408(D)

Net weight: 5 kg

Applications

- High precision and speed testing of electrolytic capacitors (original),
- DC-Link capacitors (original),
- ceramic capacitors and film capacitors (original)
- Semiconductor, LED driver chip,
- material distributed capacitance test
- High-speed automated production line integration testing
- Other kinds of capacitors

Specifications

Model	TH2638	TH2638A	TH2638B	TH2638C
Test parameters	Cp-D, Cp-Q, Cp-Rp, Cp-G, Cs-D, Cs-Q, Cs-Rs	Cp-D, Cp-Q, Cp-Rp, Cp-G, Cs-D, Cs-Q, Cs-Rs, Cs-Rs-Ls	Cp-D, Cp-Q, Cp-Rp, Cp-G, Cs-D, Cs-Q, Cs-Rs	
Test signal				
Frequency	Permitted frequency	100Hz, 120Hz, 1kHz, 10kHz, 100kHz, 1MHz, 1MHz $\pm 1\%$, 1MHz $\pm 2\%$	100Hz, 120Hz, 1kHz, 10kHz, 40kHz, 100kHz	100Hz, 120Hz, 1kHz, 10kHz
	Accuracy	$\pm 0.02\%$		
Level	Range	0.1V-1V		
	Resolution	0.01V		
	Accuracy	$\pm 5\%$		
Output mode	Continuous or synchronous			
Signal source delay	Range	0-1s		
	Resolution	0.1ms		
Signal level compensation	100/120Hz	220 μ F, 470 μ F, 1mF range		
	1kHz	22 μ F, 47 μ F, 100 μ F range		
Output impedance	100 Hz 120Hz	SLC OFF ($\geq 220\mu$ F range)	1.5 Ω	
		SLC ON ($\geq 220\mu$ F range)	0.3 Ω	
		2.2 μ F - 100 μ F range	0.3 Ω	
	1kHz	10 nF - 1 μ F range	10 Ω	
		SLC OFF ($\geq 22\mu$ F range)	1.5 Ω	
10kHz/100kHz	SLC ON ($\geq 22\mu$ F range)	0.3 Ω		
	220 nF - 10 μ F range	0.3 Ω		
	100 pF - 100 nF range	10 Ω		
1MHz	10 Ω			

Component Parameter Test Instruments

I. TH2638 / A / B / C Precision Capacitance Meter

Test speed		5-bin test speed: 1, 2, 4, 6, 8	
Max. Test speed	100/120Hz	11ms	
	1kHz	3ms	
	10k/100kHz	2.3ms	
	1MHz	2.3ms	-----
Test range mode		Auto, Hold	
Test signal frequency range	100Hz/120Hz	10 nF, 22 nF, 47 nF, 100 nF, 220 nF, 470 nF, 1μF, 2.2μF, 4.7μF, 10μF, 22μF, 47μF, 100μF, 220μF, 470μF, 1 mF	
	1k Hz	100 pF, 220 pF, 470 pF, 1 nF, 2.2 nF, 4.7 nF, 10 nF, 22 nF, 47 nF, 100 nF, 220 nF, 470 nF, 1μF, 2.2μF, 4.7μF, 10μF, 22μF, 47μF, 100μF	
	10k Hz	100 pF, 220 pF, 470 pF, 1 nF, 2.2 nF, 4.7 nF, 10 nF, 22 nF, 47 nF, 100 nF, 220 nF, 470 nF, 1μF, 2.2μF, 4.7μF, 10μF	
	100k Hz	10 pF, 22 pF, 47 pF, 100 pF, 220 pF, 470 pF, 1 nF, 2.2 nF, 4.7 nF, 10 nF, 22 nF, 47 nF, 100 nF	
	1MHz	1 pF, 2.2 pF, 4.7 pF, 10 pF, 22 pF, 47 pF, 100 pF, 220 pF, 470 pF, 1 nF	-----
Average times		1 - 256	
Trigger mode		Internal, Manual, External, Bus	Internal, Manual, External, Bus (except GPIB)
Trigger delay time	Range	0 - 1s	
	Resolution	0.1ms	
Measurement display range			
Parameters	Cs , Cp	±1.000000 aF to 999.9999 EF	
	D	±0.000001 to 9.999999	
	Q	±0.01 to 99999.99	
	Rs, Rp	±1.000000 aΩ to 999.9999 EΩ	
	G	±1.000000 aS to 999.9999 ES	
	Δ%	±0.0001 % to 999.9999 %	
Basic measurement accuracy		C:0.07%, D:0.0005	
Display mode		Floating / fixed decimal point display, ΔABS, Δ%	
List sweep		10 list sweep, sweep item: frequency , voltage	
Comparator function		11 bins: BIN1-BIN9, OUT_OF_BIN, AUX_BIN	
Interface		RS232C,LAN,USB CDC,GPIB, HANDLER,Scanner	RS232C, LAN, USB CDC, HANDLER
Internal storage		40 setting files	
External USB storage		GIF image 40 setting files test data and screen shot can be saved in the USB storage directly	
General Specifications			
Temperature, humidity, height (operating environment)		0 °C - 45 °C, 15% - 85% RH (≤40°C, non-condensing), 0 - 2000m	
Power supply	voltage	90VAC - 264VAC	
	frequency	47Hz - 63Hz	
	power	Max.150VA	
Temperature, humidity, height (Storage environment)		-20 °C - 70 °C, 0 - 90% RH (≤65°C, non-condensing), 0 - 4572m	

Standard Accessories

Three core power cord

TH26010 Gold-plated short circuit board

TH26011BS 4 terminal pair Kelvin test clip leads

TH26005C Four-terminal test fixture

Component Parameter Test Instruments

I. TH2840X Series Automatic Transformer Test System

NEW

Features

- The test speed is as high as 1000 times/s (>10kHz), without relay action time
- Test level up to 20Vrms
- The bias voltage is built-in $\pm 40V/\pm 100mA/2A$
- Up to 288 test pins (only TH2840NX)
- Industry-friendly user experience: Linux bottom layer, built-in help file
- 10.1 inch 1280×800 capacitive touch screen
- Graphical pin association setting page, so that wiring is no longer a problem
- Lk setting does not need to input the leakage inductance pin, which is more intuitive
- Enhanced balance scanning function, from 5 points to 10 points
- Range switching adopts electronic switch, fast speed, long life, no noise
- Optional LCR function
- Approximately 100M setting file storage space in the machine, and massive U disk setting file storage capacity
- Provide host computer to support early model file format conversion to ensure compatibility



RS232	LAN	HANDER	USB HOST	USB DEVICE	EXTERNAL DCI
standard	standard	standard	standard	standard	standard

TH2840X Series

Dimension: 430mm(W)x177mm(H)x265mm(D) 【TH2840AX/BX】
 430mm(W)x177mm(H)x405mm(D) 【TH2840NX】
 Weight: 11kg 【TH2840AX/BX】/17kg 【TH2840NX】

Applications

- Switching transformer scanning test, comprehensive characteristics analysis.
- Network transformer scanning test, comprehensive characteristics analysis
- Discrete passive components (L, R, C) multi-channel scanning test
- Relay drive line package, contact resistance multi-channel scanning test
- Multi-channel DC resistance DCR scanning test
- Comprehensive test analysis of multiple passive components in impedance network

Specifications

Model		TH2840AX	TH2840BX	TH2840NX	
Display	Display	10.1" Captive Touch Screen			
	Ratio	16:09			
	Resolution	1280×RGB×800			
Test PIN		20 PIN (By TH1806)		48 PIN (Can extend to 288PIN)	
Frequency	Range	20Hz-500kHz	20Hz-2MHz	20Hz-500kHz	
	Accuracy	0.01%			
	Resolution	0.1mHz (20.0000Hz-99.9999Hz)			
		1mHz (100.000Hz-999.999Hz)			
		10mHz (1.00000kHz-9.99999kHz)			
		100mHz (10.0000kHz-99.9999kHz)			
1Hz (100.000kHz-999.999kHz)					
10Hz (1.00000MHz-2.00000MHz)					
AC Test Signal Mode	Rated Value (ALC OFF)	Set the voltage as the Hcur voltage when the test terminal is open Set the current to be the current flowing from Hcur when the test terminal is short-circuited			
	Constant Value (ALC ON)	Keep the voltage on the DUT the same as the set value Keep the current on the DUT the same as the set value			

Component Parameter Test Instruments

I. TH2840X Series Automatic Transformer Test System

Test Level	Ac Voltage	5mVrms-20Vrms	F<=1MHz 5mVrms-20Vrms F>1MHz 5mVrms-15Vrms	5mVrms-20Vrms
	Accuracy	± (10%×the set value+2mV) (AC<=2Vrms) ±(10%×the set value+5mV)(AC > 2Vrms)		
	Resolution	1mVrms (5mVrms-0.2Vrms)		
		1mVrms (0.2Vrms-0.5Vrms)		
		1mVrms (0.5Vrms-1Vrms)		
		10mVrms (1Vrms-2Vrms)		
		10mVrms (2Vrms-5Vrms)		
		10mVrms (5Vrms-10Vrms) 10mVrms (10Vrms-20Vrms)		
	AC Current	50μArms-100mArms		
	Resolution (100Ω Internal Resistance)	10μArms (50μArms-2mArms)		
10μArms (2mArms-5mArms)				
10μArms (5mArms-10mArms)				
100μArms (10mArms-20mArms)				
100μArms (20mArms-50mArms)				
100μArms (50mArms-100mArms)				
RDC Test	Voltage	100mV-20V		
	Resolution	1mV (0V-1V)		
		10mV (1V-20V)		
	Current	0mA-100mA		
Resolution	10μA (0mA-10mA)			
	100μA (10mA-100mA)			
Dc Bias *	Voltage	0V-±40V		
	Accuracy	AC<=2V 1%×the set voltage+5mV		
		AC>2V 2%×the set voltage+8mV		
	Resolution	1mV (0V - ±1V)		
		10mV (±1V - ±40V)		
Current	0mA-±100mA			
Built-In Current Source	Resolution	10μA (0mA-10mA)		
		100μA (10mA- 100mA)		
	Current	0mA-2A		
Accuracy	I>5mA ± (2%×the set value+2mA)			
Resolution	1mA			
Output Impedance	30Ω, ±4%@1kHz			
	100Ω, ±2%@1kHz			
LCR Function				
Test Parameter	Method	Arbitrary selection of four parameters		
	AC	Cp/Cs, Lp/Ls, Rp/Rs, Z , Y , R, X, G, B, θ, D, Q, VAC, IAC		
	DC	RDC, VDC, IDC		
Test Terminal Configuration	Four Terminal Pair			
Test Cable Length	0m			
Computation	The absolute deviation from the nominal value Δ, the percentage deviation from the nominal value Δ%			

Component Parameter Test Instruments

I. TH2840X Series Automatic Transformer Test System

Specifications

Equivalent Way		Series, Parallel
Calibration Function		OPEN, SHORT, LOAD
Average Times		1-255
Range Selection		AUTO, HOLD
Range Configuration	LCR	100mΩ, 1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ
	RDC	1Ω, 10Ω, 20Ω, 50Ω, 100Ω, 200Ω, 500Ω, 1kΩ, 2kΩ, 5kΩ, 10kΩ, 20kΩ, 50kΩ, 100kΩ
Test Speed (Ms)		Fast+: 1ms. Fast: 3.3ms. Middle: 90ms. Slow: 220ms
Highest Accuracy		0.05% Please refer to the manuals for the details
Measurement Display Range		
Cs, Cp		0.00001pF-9.99999F
Ls, Lp		0.00001μH-99.9999kH
D		0.00001-9.99999
Q		0.00001-99999.9
R, Rs, Rp, X, Z, Rdc		0.001mΩ-99.9999MΩ
G, B, Y		0.00001μS-99.9999S
Vdc		±0V-±999.999V
Idc		±0A-±999.999A
θr		-6.28318
θd		-179.999° -179.999°
Δ%		± (0.000%-999.9%)
Turns Ratio		1: 0.001—1000: 1
Transformer Test		
Test Parameter		Cs/Cp, Ls/Lp, DCR, Zx, Rs/Rp, D, Q, dZ, Lk, Phase, Balance Turns-Ratio, Ns: Np=U2/U1, Np: Ns=U1/U2 Turns: Ns=Np×U2/U1, Np=Ns×U1/U2
Test Mode	Continuous	In the single trigger mode, manually trigger once, and once test all the test parameters.
	Step	In the single trigger mode, manually trigger once to measure one parameter. Trigger again to measure the next parameter.
Test Speed (Ms)	Fast+	Fast: 0.56ms(>10kHz)
	Fast	Fast: 3.3ms
	Middle	Middle: 90ms
	Slow	Slow: 220ms
Bias Resource		See *
Average Times		Each test parameter can set different average times, the average times is 0-255
Time Delay		Each test parameter can set a different delay time
Transformer Scanning		
Built In Scanning Board		No One Board as standard. Could extend to six boards. ((24×2) PIN per board)
Transformer Handler	Pin Definition	NS1-NS30, GOOD, NG, TEST, TRIGGER, RESET NS1-NS9, GOOD, NG, TEST, TRIGGER, RESET
	Output Characteristics	Optocoupler isolation, ULN2003 drive enhancement, collector output
Model		Direct reading, percentage

Component Parameter Test Instruments

I. TH2840X Series Automatic Transformer Test System

Test Range		Auto, Hold
Bias Resource		See *
External Scanning Box		compatible to TH1901 series, TH1831 scanning box, TH1806 series
Number Of Windings	Primary	60
	Secondary	9
Average Times		Each test parameter can set different average times, the average times is 0-255
Time Delay		Each test parameter can set a different delay time
Test Speed (Ms)	Fast	Fast: 3.3ms(>=1kHz). Fast+: 1ms(>=10kHz) (Exclude the time for the relay action)
	Middle	Middle: 90ms
	Slow	Slow: 220ms
Test Lead Interface		25*2pin FRC socket
Other Functions and Specifications		
Storage	Internal	About 100M non-volatile memory test setting file
	U Disk	Test setting file, screenshot graph, record file
Keyboard Lock		The front panel keys can be locked
Interface	USB HOST	2 USB HOST ports. Mouse and keyboard could work at the same time. Only one U disk can be used at the same time.
	USB DEVICE	Universal serial bus socket, small type B (4 contact positions); compatible with USB TMC-USB488 and USB2.0, the female connector is used to connect an external controller.
	LAN	10/100M Ethernet adaptive, 8 Pin
	HANDLER	Used for Bin signal output
	External DC BIAS Control	Support TH1778A (do not support transformer scanning)
	RS232C	Standard 9-pin, cross
	RS485	Can accept modification or connect to RS232 to RS485 adaptor
Power-On Warm-Up Time		60 Minutes
Output Voltage		100-120VAC/198-242VAC Optional, 47-63Hz
Power Consumption		More than 130VA
Size (WxHxD) Mm		430mm(W)x177mm(H)x265mm(D) 430mm(W)x177mm(H)x405mm(D)
Weight (Kg)		11kg 17kg

Standard Accessories

Three core power cord
 TH26011BS four-terminal Kelvin test cable
 TH1806B manual transformer scanning test fixture (TH2840AX/BX only)

TH260158A test cable(TH2840AX/BX only)
 TH1801-001 Foot Start Switch (TH2840AX/BX only)
 TH2829AX-001 Foot Start Switch (TH2840NX only)

Component Parameter Test Instruments

I. TH2829X Series Automatic Transformer Test System



Features

- 7-inch TFT LCD display with a resolution of 800×RGB×480
- Frequency up to 1MHz, resolution: 0.5mHz
- Signal level: 5mV-2Vrms, optional (2Vrms-10Vrms)
- Built-in 0-100mA/0-10V bias power supply, optional 1A/2A bias current source
- Up to 75 times / sec test speed
- Diode forward and reverse characteristic detection
- Improved high turns ratio and weakly coupled transformer test capability
- Improved DCR testing capabilities
- Single screen can accommodate all scan test results
- Time stamping system: memory file setting, calibration deviation and deduction time
- Sort the selected scanning parameters
- Self-test scanning fixture relays
- Flexible deviation deduction method
- Multiple handling ways for FAIL cases
- Single parameter test cycle to test independent windings
- Increased security: administrator and operator passwords
- Built-in statistical analysis capabilities: Cpk, Cp, Ck, etc.
- Bar-code reading function can be used to select a setting file or to manage the type of test products
- Optional PC-level instrument test setup file programming capability
- Online upgrade mode: USBHOST or RS232
- Support multiple instrument networking through LAN interface
- Backward compatible with TH2818X/TH2819X parameter setting file
- Storage: Internal: 100 groups of settings file to save
U disk: 500 groups of configuration files, CSV format test data, GIF format images



RS232	LAN	SCANNER	USB HOST	USB DEVICE
standard	standard	standard	standard	standard
GPIB	RS485	HANDER		
option	option	option		

TH2829X Series

Dimension(mm): 400mm(W)x132mm(H)x385mm(D)

Weight: 13kg

Applications

- Switching transformer scanning test, comprehensive characteristics analysis.
- Network transformer scanning test, comprehensive characteristics analysis
- Discrete passive components (L, R, C) multi-channel scanning test
- Relay drive line package, contact resistance multi-channel scanning test
- Multi-channel DC resistance DCR scanning test
- Comprehensive test analysis of multiple passive components in impedance network

Specifications

Model	TH2829 LX	TH2829 AX	TH2829 AX-24	TH2829 AX-48	TH2829NX	TH2829CX						
Test Pin(PIN)	20	20	24	48	72/96/120/144/168/192	20						
Test frequency	20Hz — 200kHz					20Hz — 1MHz						
Display	800×RGB×480 7 inch TFT LCD display											
LCR Function	option											
Transformer test parameters	Turn Ratio	Turns	Phase	L	C	Lk	Q	ACR	DCR	Balance	Pin Short	Diode P/N
LCR test parameters	Z , Y , C, L, X, B, R, G, D, Q, θ , DCR, Turn-Ratio, Phase, Lk											
Basic test accuracy	LCRZ		0.05%									
	DCR, Turn Ratio		0.1%									
Signal source output impedance	10 Ω , 30 Ω , 50 Ω , 100 Ω											
Test speed (ms/times)	13ms, 90 ms, 370 ms											
AC signal level	5mVrms — 2Vrms(transformer test, can be customized to 10Vrms), 5mVrms — 10Vrms(LCR function); 50 μ Arms — 100mArms											
DC bias voltage source	-----	0V — \pm 10V; 0mA — \pm 100mA										
DC bias current source	0 — \pm 1A option(option TH2901) / 0 — \pm 2A option(option TH2902)											
DC constant current source	0mA — \pm 120mA for diode forward characteristic test											
Diode test	forward test voltage		0 — 9.9999 V									
	Reverse test current		0 — 99.999 mA									
Comparator	10 bins, PASS/FAIL indication, file counting function											
Storage	Internal: 100 sets of configuration file; U disk: 500 sets of configuration files, CSV format test data, GIF format images											

Standard Accessories

Three core power cord

TH26016 Handler/Scanner standard 36P control cable (TH2829LX/AX/BX/CX only)

TH26011AS four-terminal Kelvin test cable (TH2829LX/AX/AX-24/AX-48/NX only)

TH26011BS four-terminal Kelvin test cable(TH2829CX/CX-24/CX-48 only)

TH26004B two-terminal test cable

TH1901B manual transformer scanning test fixture

TH1801-001 Foot Start Switch (except TH2829AX-24/AX-48)

TH2829AX-001 Foot Start Switch (TH2829AX-24/AX-48 only)

Component Parameter Test Instruments

I. TH1778A Series DC Bias Current Source

Features

- Features
- Provide 0-20A constant current output
- Support the extension to the maximum 120A constant current output
- Master/slave control mode, flexible tailorability and scalability
- Fine current stepping
- 0Hz-2MHz frequency response
- Two current output modes: single current and step scan
- Graphical operation, Chinese and English interface
- Two SCPI command modes, strong adaptability
- 5 control modes
- Directly controlled by TH2829/TH2827/TH2830/TH2838 series



TH1778A

TH1778AS

Applications

- Analysis of DC Characteristics of Inductors/Reactors
- Analysis of saturation characteristics of iron core/ferrite material
- Analysis of DC Characteristics of Other Materials

RS232	SlaveLink
standard	standard

TH1778A Series

Dimension(mm): 430mm(W)x177mm(H)x473mm(D)

Weight: 18kg

Specifications

Model	TH1778A	TH1778B	TH1778AS
Display	7 " 800*600 RGB TFT LCD		-----
Operation	Entitative key + foot switch		Controlled by the host
Supporting test frequency	0Hz-2MHz		
Current Range	0-±20A	0-±20A (No Extension)	0-±20A, can extend to 120A
Current	Range	0mA-1.000A 1.000A-5.000A	5.0A-120.0A
	Step	5mA 25mA	100mA
	Sweep adjustment time	4ms-3600s 10ms-3600s	20ms-3600s
	Minimum interval of sweep adjustment step	5mA 25mA	100mA
Range	1.000A/5.000A/20.0A		20.0A
Maximum output voltage	10V		
Maximum permitted DCR	$R_{max}=V_{max}/I$ (Ω)(Calculation of Rmax, please refer to the description in user manual)		
Maximum permitted inductance value	$L_{max}=V_{max}/(di/dt)$ (mH)(Calculation of Lmax, please refer to the description in user manual)		
Range mode	Auto		
Control mode for START/STOP	START/STOP entitative key, 4 foot switches, Bus		
Max. current time for continuous loading	Keeping 2-3h, continuous output		
Function	Fault self-inspection; 99 groups of custom profile management; dual-progress bar indication; Chinese and English; soft switching of slave machine; real-time operation; SCPI command set; simple dual-display computer.		
LCR Compatible	Controlled by TH2829/TH2827/TH2830/TH2838		Controlled by the host
Interface	RS232, Slaver Link		Slaver Link

Micro Signal Type Tester

II. TH2690 Series fA meter/pA meter/Electrometer/High Resistance Meter

Features

- 5.0 inch capacitive touch screen
- 6½ Digit measurement resolution
- Four measurement modes: high resistance meter, voltmeter, ammeter, electrometer independent current and voltage measurement
- Built-in voltage source: $\pm 1000V$, resolution: $700 \mu V$
- Current range: 20pA-20mA, current resolution up to $0.1fA (10^{-16}A)$, the internal resistance voltage drop in the lowest current range $<20 \mu V$
- The measurement resistance is as high as $10P \Omega (10^{16} \Omega)$, and the charge measurement is as low as 2nC. The input impedance is $>200T \Omega$
- Support voltage measurement up to 20V, temperature and humidity measurement
- Time domain view, capture transient signal effects and select specified measurement data to support data recording
- With dedicated shielding test box

Application

- material science
Biomaterials, ceramics, rubber, films, dielectric materials, electrochemical materials, ferroelectric materials, graphene, metals, organic materials, nanomaterials, polymers, semiconductors, etc.
- Electronic Component
Types of transistors such as capacitors, resistors, diodes, sensors, TFT and CNT, photoelectric devices, solar cells, etc.
- Electronic/non-electronic system
Ion beam, electron beam, sensor system, particle measurement, embedded precision instrument, etc.

Specifications

Model	fA meter/ Electrometer/ High Resistance Meter	pA meter/ Insulation Resistance Meter	fA meter	pA meter
	TH2690	TH2690A	TH2691	TH2691A
Measurement resolution	6½ Digit			
Current measurement	1fA - 20mA	0.01pA - 20mA	0.1fA - 20mA	0.01pA - 20mA
Minimum range	20pA	2nA	20pA	2nA
Resistance measurement	10PΩ	10TΩ	-----	-----
Voltage measurement	1μV - 20V	1μV - 20V	-----	-----
Input resistance	>200TΩ	>200TΩ	-----	-----
Charge measurement	1fC - 2μC	-----	-----	-----
Temperature measurement	√	√	-----	-----
Humidity measurement	√	√	-----	-----
power source	$\pm 1000V$	$\pm 1000V$	-----	-----
Minimum resolution	700μV	700μV	-----	-----

Current measurement accuracy

Range	Display resolution	Accuracy \pm (% + deviation)
20pA	1fA	1%+5fA
200pA	1fA	0.5%+5fA
2nA	1fA	0.2%+50fA
20nA	10fA	0.2%+3pA
200nA	100fA	0.2%+5pA
2μA	1pA	0.1%+50pA
20μA	10pA	0.05%+500pA
200μA	100pA	0.05%+5nA
2mA	1nA	0.05%+50nA
20mA	10nA	0.05%+500nA



NEW

RS232	LAN	HANDLER	USB HOST
standard	standard	standard	standard
USB DEVICE	GPIO	INTERLOCK	
standard	standard	standard	

Rack mount (mm): 215(W)×88(H)×412(D)
Dimension (mm): 235(W)×111(H)×440(D)

Weight: 3.5kg

Resistance measurement accuracy

Range	Display resolution	Voltage Source	Current Range	Accuracy \pm (% + deviation)
1MΩ	1Ω	20V	200μA	0.135%+1Ω
10MΩ	10Ω	20V	20μA	0.135%+10Ω
100MΩ	100Ω	20V	2μA	0.185%+100Ω
1GΩ	1kΩ	20V	200nA	0.285%+1kΩ
10GΩ	10kΩ	20V	20nA	0.285%+10kΩ
100GΩ	100kΩ	20V	2nA	0.41%+100kΩ
1TΩ	1MΩ	200V	2nA	0.45%+1MΩ
10TΩ	10MΩ	200V	200pA	0.625%+10MΩ
100TΩ	100MΩ	200V	20pA	0.75%+100MΩ

Voltage measurement accuracy

Range	Display resolution	Accuracy \pm (% + deviation)
2V	1μV	0.05%+40μV
20V	10μV	0.05%+400μV

Charge measurement accuracy

Range	Display resolution	Accuracy \pm (% + deviation)
2nC	1fC	0.5%+50fC
20nC	10fC	0.5%+500fC
200nC	100fC	0.5%+5pC
2μC	1pC	0.5%+50pC

Voltage source accuracy

Range	Display resolution	Accuracy \pm (% + deviation)	Output Current
20V	700μV	0.05%+2mV	$\pm 20mA$
1000V	35mV	0.05%+100mV	$\pm 1mA$

Standard Accessories

- Three-core power cord
- TH26058B Triax to Alligator Cable
- TH26058C Plug
- USB Cable
- TH90003D High Voltage Test Cable (For TH2690/A only)
- TH90003E High Voltage Test Cable (For TH2690/A only)
- TH2690_THS Temperature and Humidity Sensor (For TH2690/A only)

Micro Signal Type Tester

II. TH2518 Series Resistance/ Temperature Scanner

Features

- 4.3 inch 24-color touch LCD screen with 480 × 272 resolution
- Chinese and English optional operation interface
- Up to 90-channel resistance/temperature scan tests
- Support 6 units for free insertion and removal, simultaneous measurement between test units
- Maximum test speed can reach 600 times / sec
- Maximum resistance accuracy: 0.05%, minimum resolution: 10uΩ
- Basic temperature accuracy: 0.2 °C
- The adopted test end of the scan test channel is programmable
- Compatible with scanning and stand-alone measurement modes
- Temperature measurement can support PT100, PT500 and analog voltage three temperature sampling methods
- Temperature compensation function (TC)
- One-click screen capture function
- Data logging function
- Automatic upgrade of instrument operating software via USB HOST
- Comparison sort results of channel, board and machine-level can be output
- Handler interface for online operations

Specifications

Model	TH2518	TH2518A
Measuring parameters	DC resistance, temperature	DC resistance
Resistance test range	10μΩ — 200kΩ	
Basic resistance test accuracy	0.05%	
Resistance range	Auto and manual (200mΩ, 2Ω, 20Ω, 200Ω, 2kΩ, 20kΩ, 200kΩ)	
Temperature sensor type	PT500 platinum resistance, PT100 platinum resistance, analog voltage input Temperature test range	-----
Temperature test range	PT100,PT500:-10°C — 99.9°C, Analog:0V — 2V	-----
Temperature test accuracy	PT100, PT500:0.3%*measured value ±0.5°C, Analog:±1%Rd ± 3mV	-----
Measurement mode	Stand-alone, scanning	
Scanning channels	15 channels/boards, and up to 6 boards and 90 channels can be inserted. The board channel is for scanning test, and it is synchronous test between the test boards.	
Test terminal selection of test channel	Arbitrary configuration between channels (programmable)	
Test current	≤100mA	
Measurement speed	single board: 100 times / sec, 40 times / sec, 2 times / sec, 6 boards: 600 times / sec, 240 times / sec, 12 times / sec	
Temperature compensation	√	-----
Display results	Simultaneous display the test results of 16 channels and support page turning	
Short-circuit clear correction	Support full-scale short-circuit clearing for all channels	
Comparators	Comparison boundaries are set separately for each test channel	
Limit mode	ABSDev, ABS, %	
Trigger mode	Auto trigger, manual trigger, bus trigger, Handler trigger, foot switch trigger	
Test terminal	Four-terminal test	
Storage	30 sets of instrument parameters	

Standard Accessories

Three-core power line
TH26050S Four-terminal test cable



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

Foot switch
option

Dimension(mm):280(W)×88(H)×440(D) Weight:7.5kg

Application

- Components
Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point
- Cables, connectors
Strand wire, connectors, switches
- Material
Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil
- New energy
Electric vehicle battery pack connecting bridge, battery connection resistor

Micro Signal Type Tester

II. TH2515 DC Resistance Meter

Features

- Maximum accuracy: 0.01%
- Temperature accuracy: 0.1℃
- Minimum resolution: 0.1 $\mu\Omega$ (resistance)
- Low-resistance test mode can effectively protect DUT
- Multiple measurement combinations of R, LPR, T
- 24 bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480×272
- Temperature compensation(TC)
- Temperature conversion(Δt)
- Maximum sampling rate: 100samps/sec
- Offset voltage compensation (OVC)
- Customer self-correction(0 ADJ)
- Simultaneously output compare results of 10 bins (OVER, PASS and BEEP)
- Statistics function: CpK, Cp
- 30 groups of parameter files can be saved and loaded
- Screen information can be stored on U-disk
- Data save function brings convenience for saving measurement result
- Automatically update operation software through USB HOST
- Operation languages: Chinese and English
- Intelligent detection for test state error
- Flexible and convenient file operation system
- Handler interface realizes on-line operation.
- Interfaces such as RS232, USB HOST, USB Device and LAN are available and GPIB is optional.
- Compatible with LXI C standard Specifications



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH2515

Rack mount (mm):215(W)×88(H)×335(D)
 Dimension (mm):235(W)×105(H)×360(D)
 Weight:3.6kg

Application

- Components
Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point
- Cables, connectors
Strand wire, connectors, switches
- Material
Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil
- New energy
Electric vehicle battery pack connecting bridge, battery connection resistor

Brief Introduction

■ On the basis of rich experience in impedance test and wide market research, now Tonghui launches a new touch screen meter---TH2515 DC Resistance meter. TH2515, with elegant appearance, easy operation and excellent performance, is comparable to the most advanced products in the market.

TH2515 adopts 32 bits CPU and high density SMD technology. 24 bits, 4.3-inch and touch LCD screen brings ease for your eyes and convenience to your operation. For the contact influence of the thermoelectricity on DUT, its elimination is achieved. The maximum 0.01% accuracy and minimum 0.1 $\mu\Omega$ resolution shore up its leading role in testing relay contact resistance, interconnecting resistance, conductor resistance, PCB resistance and welding-hole resistance. Temperature compensation and conversion functions make your tests be free from the effect of the environment temperature. The offset voltage compensation has effectively eliminated the electromotive force of the DUT and its contact potential difference. Automation on production lines can be greatly improved by the realization of ultra-high test speed and the signal output of 10 compare results through HANDLER interface.

Providing 1 optional interface---GPIB and 4 standard ones---RS232C, USB HOST, USB Device and LAN, TH2515 is able to make data communication with PC and further realizes remote control.

Specifications

Model	TH2515		
Display	24-bit, 400 X 272 and touch TFT LCD screen		
Reading digits	5 ½ digits		
Resistance measurement			
Measurement range	0.1 $\mu\Omega$ --110M Ω		
Resistance range	Current	Resolution	*Accuracy \pm (ppm of Rd + ppm of Fs)
20 m Ω	1A	0.1 $\mu\Omega$	2500+10
200m Ω	1A	1 $\mu\Omega$	2500+10
200m Ω	100mA	1 $\mu\Omega$	3500+10
2 Ω	100mA	10 $\mu\Omega$	350+10
Model	TH2515		

Micro Signal Type Tester

II. TH2515 DC Resistance Meter

20Ω	10mA	100μΩ	250+10
200Ω		1mΩ	100+10
2kΩ	1mA	10mΩ	100+10
20kΩ		100mΩ	100+5
100/200kΩ	100μA	1Ω	100+30
1/2MΩ	10μA	10Ω	200+10
10MΩ	1μA	100Ω	1000+60
100MΩ	100nA	1kΩ	8000+600
Measurement function			
Resistance measurement time	FAST: 7ms; MED: 22ms; SLOW1: 102ms; SLOW2: 402ms Above data is correct when DISPLAY is OFF; When DISPLAY is ON, 20ms should be added.		
Temperature measurement time	100 ± 10ms		
Test terminal	4-terminal		
Average setup	1-255		
Zero clearing	√		
Range switch	AUTO and Manual		
Trigger mode	Internal, Manual, External, BUS		
Power frequency selection	√ (avoid the interference of the power noise)		
Setting data storage	30 groups		
Low voltage measurement	Open voltage≤ 60mV Effective range: 2Ω, 20Ω, 200Ω, 2kΩ		
Thermal electromotive force elimination	√		
Statistics function	AVG, MAX, MIN, OSD(Overall standard deviation), SSD(Sample standard deviation), Process capacity index (Cp, CpK)		
Measurement error detection	√ (Detect the measurement cable has been connected correctly or not.)		
Multipole connector	√ (Noise abatement function of high-resistance is optional)		
Beep state	Comparator, Bin compare, Button		
Key lock	√		
Temperature measurement			
Temperature measurement1	-10.0°C--99.9°C Sensor: PT500		
Temperature measurement2	Analog input: 0V--2V Display: -99.9°C -- 999.9°C		
Temperature compensation	(Convert the resistance measurement value to that one measured under preset temperature)		
Temperature	(Temperature rising is gained from resistance test values before and after warming)		
Compare Judge			
Comparator	Signal output	HI/IN/LO	
	Beep	Beep mode: OFF, IN, HI/LO	
	Limit setup mode	Absolute value high/low limit, Percentage high/low limit +nominal value	
Sorting	10 bins, absolute value/ percentage		
External trigger delay time	AUTO: dependent on range, low voltage mode ON/OFF, OVC (offset voltage compensation) ON/OFF MANUAL: 0.000--9.999s		
External input trigger	Rising/Falling edge		
Interface			
Interface	USB DEVICE, USB HOST, RS232C, HANDLER, GPIB (OPTION)		
General specification			
Working condition	Temperature:0°C - 40°C, Humidity:≤ 80%RH		
Storage condition	Temperature:-10°C-50°C,Humidity: ≤90%RH		
Accuracy guarantee condition	Temperature:18°C - 28°C, Humidity:≤ 80%RH		
Power	Voltage	99V—242V	
	Frequency	47.5Hz—63Hz	
Consumption	30 VA		
Dimension	215mm×87mm×335mm (net size) 235mm×105mm×360mm (with foam sheath)		
Weight	Approx. 3.6kg		

*: the accuracy is guaranteed under certain environmental and test conditions:temperature of 18°C-28°C,humidity is ≤ 80%RH,test speed is SLOW2 and OVC function is ON(see details in Manual).

Standard Accessories

Three core power cord

TH26050S

Four-terminal test cable

PT500 temperature sensor

Micro Signal Type Tester

II. TH2516 DC Resistance Meter

Features

- Maximum resistance accuracy: 0.05%
- Temperature accuracy: 0.2°C
- Minimum resolution: 1μΩ
- Low-resistance test mode can effectively protect DUT
- Multiple measurement combinations of R, LPR, T
- 24 bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480×272
- Temperature compensation(TC)
- Temperature conversion(Δt)
- Maximum sample rate: 50samps/sec
- Offset voltage compensation (OVC)
- Customer self-correction(0 ADJ)
- Simultaneously output compare results of 3 bins (OVER, PASS and BEEP)
- Statistics function: CpK, Cp
- 30 groups of parameter files can be saved and loaded
- Screen information can be stored on U-disk
- Data save function brings convenience for saving measurement result
- Automatically update operation software through USB HOST
- Operation languages: Chinese and English
- Flexible and convenient file operation system
- Handler interface realizes on-line operation
- Achieve data communication with PC and remote control through interfaces such as RS232, USB HOST, USB Device



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard

TH2516 Series

Rack mount (mm): 215(W)×88(H)×335(D)
 Dimension (mm): 235(W)×105(H)×360(D)
 Weight: 3.6kg

Application

- Components
Resistor, inductor, transformer, motor, relay, circuit solder joint, capacitor riveting point
- Cables, connectors
Strand wire, connectors, switches
- Material
Heat-sensitive materials (fuses, sensor for thermistors), conductive materials such as metal foil
- New energy
Electric vehicle battery pack connecting bridge, battery connection resistor

Brief Introduction

On the basis of rich experience in impedance test and wide market research, now Tonghui launches the new DC impedance measurement instrument with touch and LCD screen ---TH2516 DC Resistance meter. TH2516, with elegant appearance, easy operation and excellent performance, is comparable to the most advanced products in the market.

TH2516 adopts 32 bits CPU and high density SMD technology. 24 bits, 4.3-inch and touch LCD screen brings ease for your eyes and convenience to your operation. The maximum 0.05% accuracy and minimum 1 μΩ resolution shore up its leading role in testing relay contact resistance, interconnecting resistance, conductor resistance, PCB resistance and welding-hole resistance. Temperature compensation and conversion functions make your tests be free from the effect of the environment temperature. The offset voltage compensation has effectively eliminated the electromotive force of the DUT and its contact potential difference. For the contact influence of the thermoelectricity on DUT, its elimination is achieved. Automation on production lines can be greatly improved by the realization of ultra-high test speed and the signal output of 3 compare results through HANDLER interface.

Specifications

Model	TH2516			TH2516A			TH2516B		
Display	24-bit, 480 X 272 and touch TFT LCD screen								
Reading digits	4½ digits								
Resistance measurement									
Measurement range	1μΩ --2MΩ			10μΩ --200kΩ			1μΩ --20kΩ		
Resistance range	Current	Resolution	Accuracy Rd%+digits	Current	Resolution	*Accuracy Rd%+digits	Current	Resolution	*Accuracy Rd%+digits
20 mΩ	1A	1μΩ	0.100+3	-----	-----	-----	1A	1μΩ	0.100+3
200mΩ	100mA	10μΩ	0.05+2	100mA	10μΩ	0.05+2	100mA	10μΩ	0.1+2
2Ω		100μΩ			100μΩ			100μΩ	
20Ω	10mA	1mΩ		10mA	1mΩ		10mA	10mΩ	
200Ω	1mA	10mΩ		1mA	10mΩ		1mA	10mΩ	
2kΩ	100μA	100mΩ		100μA	100mΩ		100μA	100mΩ	
20kΩ		1Ω		100μA	1Ω		100μA	1Ω	
200kΩ	10μA	10Ω	10μA	10Ω	-----	-----			
2MΩ	1μA	100Ω	0.2+2	-----	-----	-----			

Micro Signal Type Tester

II. TH2516 DC Resistance Meter

Measurement function			
Resistance measurement time	FAST:10ms; MED:25ms; SLOW1:115ms; SLOW2:455ms Above data is correct when DISPLAY is OFF; when DISPLAY is ON, 20ms should be added.		
Temperature measurement time	100 ± 10ms	-----	
Test terminal	4-terminal		
Average setup	1--255		
Zero clearing	√		
Range switch	Auto, Manual		
Trigger mode	Internal, Manual, External, BUS		
Power frequency selection	√ (avoid the interface of the power noise)		
Setting data storage	30 groups		
Low voltage measurement	Open voltage: ≤ 40mV Effective range: 2Ω, 20Ω, 200Ω, 2kΩ		
Thermal electromotive force elimination	√	-----	
Statistics function	AVG, MAX, MIN, OSD (Overall standard deviation), SSD (Sample standard deviation), Process capacity index (Cp, cpk)		
Beep state	Comparator, Button		
Key lock	√		
Temperature measurement			
Temperature measurement1	-10.0°C--99.9°C Sensor: PT500	-----	-----
Temperature measurement2	Analog input: 0V--2V Display: -99.9°C-- 999.9°C	-----	-----
Temperature compensation	√ (convert the resistance measurement value to that one measured under preset temperature)	-----	-----
Temperature switch	√ (temperature rising is gained from resistance test values before and after warming)	-----	-----
Compare Judge			
Comparator	Signal output	HI/IN/LO	
	Beep	Beep mode: OFF, IN, HI/LO	
	Limit setup mode	Absolute value high/low limit, Percentage high/low limit +nominal value	
Sorting	3 bins, absolute value/percentage		
External trigger delay time	Auto: dependent on range, low voltage mode ON/OFF, OVC (offset voltage compensation) ON/OFF Manual: 0.000--9.999s		
External input trigger	Rising/Failing edge		
Interface			
Interface	USB DEVICE, USB HOST, RS232C, HANDLER		
General specification			
Working condition	Temperature:0°C - 40°C, Humidity:≤ 80%RH		
Storage condition	Temperature:-10°C - 50°C, Humidity:≤ 90%RH		
Accuracy guarantee condition	Temperature:18°C - 28°C, Humidity:≤ 80%RH		
Power	Voltage	99V—121V,198V—242V	
	Frequency	47.5Hz—63Hz	
Consumption	30 VA		
Dimension	215mm×89mm×360mm (net size) 235mm×104mm×360mm (with foam sheath)		
Weight	Approx.3.6kg		

*: the accuracy is guaranteed under certain environmental and test conditions:temperature of 18°C-28°C,humidity is ≤ 80%RH,test speed is SLOW2 (see details in Manual).

Standard Accessories

Three core power cord

TH26050S Four-terminal test cable

PT500 temperature sensor (only for TH2516)

Micro Signal Type Tester

II. TH2684/TH2684A High Precision IR Tester

Features

- 320×240 dot-matrix LCD
- Powerful charging function
- High speed measurement:100meas/sec
- High measurement accuracy:±2% (< 1TΩ)
- Contact detection function for capacitive components
- Measurement range:TH2684 : 10kΩ to 50TΩ
TH2684A: 10kΩ to 100TΩ
- Ultra-low leakage current test: minimum current is 10pA, accuracy: 2% ±2pA
- Measurement voltage:
TH2684: 10V – 500V, dual-output
TH2684A:10V–1000V,single-output
- Dual outputs (precharge voltage output and test voltage output) can be set.
- The precharge voltage output can be set to follow the test voltage output and can be finely adjusted on test voltage. Also the precharge voltage can be set to work in independent mode.
- When the test current is less than 10nA, the internal input impedance can be selected between 10kΩ and 1MΩ to ensure rapid and accurate test.
- TH2684 charge current:2mA , 25mA, 200mA selectable
TH2684A charge current:2mA , 25mA , 100mA selectable
- 7 current ranges, manual or auto range mode
- 4-bin comparison function
- Programmable sequence test mode
- R-T and I-T Curve test and display mode
- Auto store setup parameters
- Screen hardcopy to be saved as BMP file to a U disk
- Automatically upgrade firmware by a U disk
- Selectable Chinese and English operation interfaces
- Achieve automatic test system by Handler interface
- Achieve remote control by RS232C and USB Device interface
- Support scanning interface for mass tests

Application

- Ultra-High Value Resistors
- Insulation resistance and leakage current of capacitors
- Various dielectric insulating materials, equipment, wires and cables
- Insulation testing from safety regulations
- Work as high voltage DC power supply



RS232	USB HOST	USB DEVICE	HANDLER	SCANNER	GPIB
standard	standard	standard	standard	standard	option

TH2684/A

Dimension(mm):400(W)×130(H)×430(D)

Weight:14kg / 10kg

Brief Introduction

■ TH2684/TH2684A High Precision IR Tester is an intelligent measurement instrument that is used for rapid measurements on IR properties of electronic parts and components, dielectric materials, equipments, cables, etc. Large LCD and user friendly menu provide you easier operation.

This instrument is especially designed for capacitor IR test TH2684/TH2684A can achieve rapid measurements through following methods:

① Selectable internal input impedance: If the current is greater than 10nA, only 10kΩ input impedance can be used; if the current is below 10nA, you can choose 10kΩ or 1MΩ impedance to test.

② With the built-in dual voltage output, TH2684 can charge large capacitors. By dual voltage output, TH2684 is able to output a precharge voltage up to 500V, 200mA. In voltage follow mode, precharge voltage follow with the test voltage output and can be finely adjusted. Above features ensure the perfect charge of capacitive materials.

③ TH2684A can output a voltage of 1000V, 100mA to fully charge the capacitive material.

In addition, user can program the sequence measurement steps (up to 18 steps) on TH2684/TH2684A. For instance, charge, wait, test, and discharge steps can be programmed. Each step can last up to 100s.

TH2684/TH2684A has a unique contact detection function. For capacitive material such as capacitors and cables, contact detection function can detect the contact of components under test. Moreover, this detection function will not increase any test time.

TH2684 equips with interfaces of RS232, USB DEVICE, SCANNING and Handler. Handler interface provide convenience for automatic test system; SCANNING interface is useful for mass measurement of components. User can use a scanner to speed measurement of components.

Micro Signal Type Tester

II. TH2684/TH2684A High Precision IR Tester

Specifications

Model	TH2684	TH2684A
Resistance test		
Range	10 k Ω to 50T Ω	10 k Ω to 100T Ω
Accuracy	Test current > 100pA: 2% Test current \leq 100 pA: 2% \pm Vtest/2pA	
Current test		
range	Range 1 :100uA – 1mA ; Internal Input impedance 10 k Ω	
	Range 2 :10uA – 100uA ; Internal Input impedance 10 k Ω	
	Range 3 :1uA – 10uA ; Internal Input impedance 10 k Ω	
	Range 4 :100nA – 1uA ; Internal Input impedance 10 k Ω	
	Range 5 :10nA – 100nA ; Internal Input impedance 10 k Ω	
	Range 6 :1nA – 10nA ; Internal Input impedance 10 k Ω or 1M Ω (selectable)	
	Range 7 :10pA – 1nA ; Internal Input impedance 10 k Ω or 1M Ω (selectable)	
Accuracy	2% \pm 2pA	
Measurement voltage		
Range	10 to 500V, 1V resolution	10 to 1000V, 1V resolution
Accuracy	2% of readout, or \pm 1V	
Source resistance	200 Ω	
Current limit	2,25, or 200mA	2, 25 , or 100mA
Voltage Output	Manually turn on or off on front panel, or controlled by built-in timer, or by remote control.	
Timing	Programmable charge time: 0 to 1000s	
Measurement delay	0 to 1000s programmable	
Discharge resistance	2k Ω	
Discharge time	$t = 0.03 \times C_x$ (in μ F), when Vtest falls to 1% of the test level.	
Measurement speed		
Trig mode	Single measurement: < 100ms(exclude charge time) Average up to 100 measurements:<100 + (N-1) x 100 ms (exclude charge)	
Continuous mode	Direct readout: 100ms – 10000ms depending on average number	
Comparator	4 bins:(3 bins for PASS,1 bin for FAIL)	
Range mode	Auto, Hold	
Average times	1 to100	
Memory	20 sets of setup values can be stored.	

General Specifications

Operating temperature and humidity	10°C - 40°C, \leq 90%RH
Power supply	90 to 130 V AC(60Hz) or 198 to 260V AC(50HZ)
Power consumption	TH2684 : 250W TH2684A: 150W

Standard Accessories

TH26004B 2-terminal test clip leads

Options

TH26002 IR test fixture

Micro Signal Type Tester

II. TH2683A/B Insulation Resistance Meter

Features

- Test voltage range: 1-1000V(TH2683A)
1-500V(TH2683B)
- Insulation resistance test range: 100KΩ-10TΩ
- Insulation resistance, leakage current dual display
- 24-bits, 4.3-inch and 4-wire touch LCD screen
- LCD resolution: 480*272
- Zero clearing function
- Contact detection function for capacitive components
- Fast test: 30ms
- Programmable sequence test mode
- 6 ranges, manual or auto range mode
- 4-bin comparison function: 3 bins for PASS, 1 bin for FAIL
- 20 setup files can be stored in the internal memory, support U-disk
- Measurement data can be stored on U-disk
- Automatically upgrade firmware by a disk
- Selectable Chinese and English operation interfaces
- Handler interface realizes on-line operation
- Achieve remote control by RS232C and USB Device interface
- Footswitch trigger function



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard

TH2683A/B

Rack mount (mm): 215(W)×88(H)×335(D)
Dimension (mm): 235(W)×105(H)×360(D)
Weight: 3.6kg

Application

- Ultra-High Value Resistors
- Insulation resistance and leakage current of capacitors
- Various dielectric insulating materials, equipment, wires and cables
- Insulation testing from safety regulations

Specifications

Model	TH2683A	TH2683B
Resistance test		
Test range	100kΩ-10TΩ	100kΩ-5TΩ
Test accuracy	I>10nA :±2% I≤10nA :±5%	
Current test		
Test range	Range 1: 100uA - 1mA, internal input impedance 10kΩ Range 2: 10uA - 100uA, internal input impedance 10kΩ Range 3: 1uA - 10uA, internal input impedance 10kΩ Range 4: 100nA - 1uA, internal input impedance 10kΩ Range 5: 10nA - 100nA, internal input impedance 1MΩ Range 6: 1nA - 10nA, internal input impedance 1MΩ	
Test accuracy	2%±3pA	
Test voltage		
Range	1V-1000V	1V-500V
Accuracy	Voltage≥10V: 1%±1V Voltage<10V: 10%±0.1V	
Current limit	10mA	
ON/OFF	Manually turn on or off it on front panel, or controlled by built-in timer, or by remote control	
Charge time	0-999s programmable	
Measurement delay	0-999s programmable	
Measurement speed	Fast: single measurement times≤30ms; Slow: single measurement times≤60ms	
Comparator function	4 bins: 3 bins for PASS, 1 bin for FAIL	
Range mode	Auto, Hold	
Memory	Internal memory and external USB disk	

Standard Accessories

TH26004B 2-terminal test clip leads

Micro Signal Type Tester

II. TH1953/TH1963 Digit Multimeter

Features

- 4.3-inch LCD color display, Chinese and English menu
- 6 1/2 bit 1199999 digits reading (TH1963/TH1963A)
- 5 1/2 digit 119999 digits reading (TH1953)
- Test speed up to 1000 / s
- Small size, front and rear input terminal, easy to shelve (TH1963 only)
- Histogram, bar graph, trend chart display
- AC low frequency signal can be tested down to 3Hz
- Capacitance test function
- Up to 5V diode test voltage
- Stores data up to 10,000
- Fast Chinese and English help



RS232	LAN	USB HOST	USB DEVICE	GPIB OR HANDLER
standard	standard	standard	standard	option

TH1963

Rack mount (mm): 215(W) x 88(H) x 300(D)
 Dimension (mm): 235(W) x 105(H) x 320(D)
 Net weight: 2.7 kg

Application

- Production line workbench
- Maintenance workbench
- Teaching laboratory
- Automated test equipment

Specifications

Model	TH1963A		TH1953			
Display	4.3-inch LCD color display					
Display digits	1199999 digits reading			119999 digits reading		
Measurement parameters	DC voltage, AC voltage, DC current, AC current, DC resistance, capacitance, frequency, breakover, diode, temperature					
Display mode	Direct reading, histogram, bar graph, trend chart					
Measurement speed	Up to 1000 times / s					
Math function	Reset function, Min / Max / Average / Standard deviation, dB, dBm					
Common features	Range	Trigger mode	Reading-hold	Limit measurement		
	Auto / Manual	LOCAL: AUTO / SINGLE / EXT REMOTE: IMMEDIATE / BUS / EXT	Yes	HI, Lo and IN (PASS), with sound beep		
Technical Index	Uncertainty: \pm (% of reading + % of range), $T_{CAL}=25^{\circ}C$					
Parameters	Range / Test Range	Frequency	Highest annual accuracy $T_{CAL} \pm 5^{\circ}C$			Highest temperature coefficient/ $^{\circ}C$
			TH1963	TH1963A	TH1953	
DC voltage	100.0000 mV - 1000.000V (TH1963/A) 100.000 mV - 1000.00V (TH1953)		0.0035 + 0.0005	0.0075 + 0.0005	0.010 + 0.004	0.0005 + 0.0001
True RMS AC voltage	100.000mV - 750.000V	3 - 5Hz	1.00 + 0.03	1.00 + 0.03	1.00 + 0.03	0.100 + 0.003
		5 - 10Hz	0.35 + 0.03	0.38 + 0.03	0.38 + 0.03	0.035 + 0.003
		10Hz - 20kHz	0.06 + 0.03	0.09 + 0.03	0.09 + 0.03	0.005 + 0.003
		20 - 50kHz	0.12 + 0.05	0.15 + 0.05	0.15 + 0.05	0.011 + 0.005
		50 - 100kHz	0.60 + 0.08	0.63 + 0.08	0.63 + 0.08	0.060 + 0.008
		100 - 300kHz	4.00 + 0.50	4.00 + 0.50	4.00 + 0.50	0.200 + 0.020
DC Resistance	10 Ω -100M Ω , Test current: 10mA - 500nA		0.010 + 0.001	0.014 + 0.001	0.030 + 0.004	0.0006 + 0.0001
DC current	100 μ A - 10mA		0.050 + 0.006	0.050 + 0.005	0.050 + 0.008	0.0020 + 0.0005
	100mA		0.050 + 0.004	0.050 + 0.004	0.050 + 0.004	0.0020 + 0.0005
	1A		0.100 + 0.004	0.100 + 0.004	0.100 + 0.004	0.0050 + 0.0010
	3A		0.200 + 0.020	0.200 + 0.020	0.200 + 0.020	0.0050 + 0.0020
	10A		0.120 + 0.010	0.120 + 0.010	0.250 + 0.004	0.0050 + 0.0010
AC current	100 μ A - 100mA	3kHz - 5kHz	1.00 + 0.04	0.10 + 0.04	0.10 + 0.04	0.100 + 0.006
		5kHz - 10kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.030 + 0.006
	1A	3kHz - 5kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.015 + 0.006
		5kHz - 10kHz	0.10 + 0.04	0.10 + 0.04	0.10 + 0.04	0.030 + 0.006
	3A	3Hz - 5kHz	0.23 + 0.04	0.23 + 0.04	0.23 + 0.04	0.100 + 0.006
		5kHz - 10kHz	0.23 + 0.04	0.23 + 0.04	0.23 + 0.04	0.030 + 0.006
10A	3Hz - 5kHz	0.15 + 0.04	0.15 + 0.04	0.15 + 0.04	0.100 + 0.006	
		5kHz - 10kHz	0.15 + 0.04	0.15 + 0.04	0.15 + 0.04	0.030 + 0.006
Frequency	3Hz - 10Hz		0.100	0.100	0.100	0.0002
	10Hz - 100Hz		0.030	0.030	0.030	0.0002
	100Hz - 1kHz		0.010	0.012	0.012	0.0002
	100Hz - 300kHz		0.010	0.012	0.012	0.0002
	Square wave		0.010	0.012	0.012	0.0002
Diode	5V, Test current: 1mA		0.010 + 0.030		0.1 + 0.02	0.0010 + 0.0020
Breakover	1k Ω , Test current: 1mA		0.010 + 0.030		0.1 + 0.02	0.0010 + 0.0020
Capacitance	1.0000nF		1.0 + 0.5			0.02
	10.000nF - 1.0000mF		0.5 + 0.1			0.02
	10.000mF		1.0 + 0.5			0.02
Temperature	PT100 (DIN/ IEC 751)		\pm 0.05 $^{\circ}C$			
	5 k Ω Thermistor		\pm 0.10 $^{\circ}C$			

Standard Accessories

- 3 cord power line
- TH26017 USB Cable
- TH26036 1 pair of test lead (red and black)

Micro Signal Type Tester

II. TH1941/TH1942 Digit Multimeter

Measurement condition									
Calibration cycle: one year									
Operation Humidity: 18°C–28°C , ≤90%RH; When resistor range is 10M and 100M, ≤70%RH									
Warming up time: 30 min									
Accuracy is expressed as: +/- (% of reading + % of range)									
Temperature coefficient: 0°C–18°C & 28°C–40°C, +0.1%×accuracy /°C									
Following is the specification at slow mode, others please refer the operation manual .									

Model		TH1941					TH1942				
Speed (counts/second)		Slow	Middle	Fast		Slow	Middle	Fast			
DCV,DCI		5	10	25		5	10	25			
ACV,ACI		5	10	25		5	10	25			
Ω		5	10	25		5	10	25			
AC+DC		1.2	1.4	1.5		1.2	1.4	1.5			
Freq		1	2	3.9		1	2	3.9			
DC voltage		Max. reading	Resolution	Accuracy	Input impedance	Max. reading	Resolution	Accuracy	Input impedance		
Range	200mV/500mV	210.00	10μV	0.03+0.04	10MΩ	510.00	10μV	0.02+0.016	10MΩ		
	2V/5V	2.1000	100μV	0.03+0.02	11.1MΩ	5.1000	100μV	0.02+0.008	11.1MΩ		
	20V/50V	21.000	1mV	0.03+0.02	10.1MΩ	51.000	1mV	0.02+0.008	10.1MΩ		
	200V/500V	210.00	10mV	0.03+0.02	10MΩ	510.00	10mV	0.02+0.008	10MΩ		
	1000V	1200.00	100mV	0.03+0.02	10MΩ	1200.00	100mV	0.02+0.008	10MΩ		
DC current		Max. reading	Resolution	Accuracy	Load voltage/ shunt resistance	Max. reading	Resolution	Accuracy	voltage /shunt		
Range	2mA/5mA	2.1000	0.1μA	0.08+0.025	<0.3V/100Ω	5.1000	0.1μA	0.05+0.010	<0.6V/100Ω		
	20mAV/50mA	21.000	1μA	0.08+0.020	<0.04V / 1Ω	51.000	1μA	0.05+0.008	<0.06V / 1Ω		
	200mA/500mA	210.00	10μA	0.08+0.020	<0.3V / 1Ω	510.00	10μA	0.05+0.008	<0.6V / 1Ω		
	2A/5A	2.1000	100μA	0.3+0.025	<0.05V / 10mΩ	5.1000	100μA	0.25+0.010	<0.1V / 10mΩ		
	20A	20.000	1mA	0.3+0.025	<0.6V / 10mΩ	20.000	1mA	0.25+0.010	<0.6V / 10mΩ		
AC voltage		200mV	2V	20V	200V	750V	500mV	5V	50V	500V	750V
Resolution		10μV	100μV	1mV	10mV	100mV	10μV	100μV	1mV	10mV	100mV
Accuracy	20~50 Hz	1.0+0.2		-----		1.0+0.08		-----			
	50~20 kHz	0.5+0.15	0.4+0.05		0.8+0.075		0.5+0.06	0.35+0.02		0.50+0.03	
	20k~50 kHz	1.8+0.25			1.5+0.10		1.5+0.1			1.00+0.04	
	50k~100 kHz	3.0+0.75			3.0+0.25		3.0+0.3			3.0+0.1	
AC current		2mA	20mA	200mA	2A	20A	5mA	50mA	500mA	5A	20A
Resolution		0.1μA	1μA	10μA	100μA	1mA	0.1μA	1μA	10μA	100μA	1mA
Accuracy	20~50 Hz	1.50+0.5		2.00+0.5		1.50+0.16		2.00+0.16			
	50~2 kHz	0.5+0.3		0.5+0.3		0.5+0.08		0.5+0.1			
	2k~20 kHz	2+0.5	2+0.38		-----		2+0.16	2+0.12		-----	
Load voltage/shunt resistance		Same as DC current					Same as DC current				
Resistance		Max. reading	Resolution	Test current	Accuracy	Max. reading	Resolution	Test current	Accuracy		
Range	200Ω/500Ω	210.00	10mΩ	0.5 mA	0.10+0.05	510.00	10mΩ	0.5 mA	0.10+0.010		
	2 kΩ/5 kΩ	2.1000	100mΩ	0.45 mA	0.10+0.025	5.1000	100mΩ	0.45 mA	0.10+0.008		
	20 kΩ/50 kΩ	21.000	1Ω	45μA	0.10+0.025	51.000	1Ω	45μA	0.10+0.008		
	200 kΩ/500 kΩ	210.00	10 Ω	4.5μA	0.10+0.025	510.00	10 Ω	4.5μA	0.10+0.008		
	2MΩ/5 MΩ	2.1000	100 Ω	450nA	0.15+0.025	5.1000	100 Ω	450nA	0.15+0.008		
	20MΩ/50 MΩ	21.000	1kΩ	45nA	0.30+0.05	51.000	1kΩ	45nA	0.30+0.010		
Frequency		Max. reading	Resolution	Accuracy	Sensitivity	Max. reading	Resolution	Accuracy	Sensitivity		
Range	5~10Hz	9.9999	0.0001Hz	0.05+0.02	200mV rms	9.9999	0.0001Hz	0.05+0.02	200mV rms		
	10~100Hz	99.999	0.001Hz	0.01+0.02	300mV rms	99.999	0.001Hz	0.01+0.02	300mV rms		
	100~100kHz	999.99	0.1Hz	0.01+0.008	300mV rms	999.99	0.1Hz	0.01+0.008	300mV rms		
	100k~1MHz	9999.9	10Hz	0.01+0.008	500mV rms	9999.9	10Hz	0.01+0.008	500mV rms		

Micro Signal Type Tester

II. TH2523 Battery Tester

Features

- Multiple test functions
 - 4-terminal test, the test can't be influenced by impedance of test leads.
 - Contact inspection, to inspect the contact of test leads in testing
 - Deviation deduction (rel) and reference operation, eliminate the influence of base to test result.
- Feature of battery tester
 - Basic impedance accuracy: 0.1%
 - Basic voltage accuracy: 0.1%
 - Min. resolution of impedance: 1 $\mu\Omega$
 - Min. resolution of voltage: 100 μ V
 - Max. test speed 50 times/s
 - 1kHz AC constant current source test
- R, V, L, Z, θ test
- 24 bit color 4.3 inch LCD display
- LCD resolution 480 \times 272
- Direct and $\Delta\%$ display
- V, I test signal level monitor function
- Graphic scanning and analysis
- 10 bin compare, High limit, low limit, pass and alarm function
- Statistics, like CpK, Cp.etc
- 100 groups of file for storage and load
- Information in screen stored in U disk.
- Automatic update through USB HOST
- Chinese-English operation system selectable
- Foot switch trigger function



RS232	USB HOST	USB DEVICE	HANDLER	GPIB
standard	standard	standard	standard	option

TH2523/A

Rack mount (mm): 215(W) \times 88(H) \times 335(D)
 Dimension (mm): 235(W) \times 105(H) \times 360(D)
 Weight: 3.6kg

Application

- Fast test for button battery and battery pack .etc.
- For cell phone, home appliances, electric vehicle and bike .etc.
- For high voltage battery test
- For early battery R&D test
- Contact resistance test
- Degradation and lifetime - evaluation of battery
- UPS on-line test
- ESR test of super capacitor

Specifications

Model		TH2523	TH2523A
Display	Displayer	4.3 inch 480 \times 272 24 bit color TFT display	
	Displayed digit	R: slow 5 digits, Max. displayed digit 35000; fast, Max. displayed digit 3500 V: slow 5 digit, Max. displayed digit 35000; fast, Max. displayed digit 3500	
Parameter		R,V,R-V,Z- θ° ,Z- θ_r , L-Q,L-R,R-X,R-Q	
Basic accuracy		R:0.1%, V:0.05%	
Test signal source	Frequency	1kHz \pm 0.2Hz sine waveform	
	Constance current	100mA/10mA/1mA/100 μ A/10 μ A	
Display range	R/ Z/ X	1 $\mu\Omega$ —3.5k Ω	
	DC V	100 μ V—65V	100 μ V—350V
	L	0.2nH-1H	
	Q	0.001—9999.9	
	θ_d (deg)	-179.99—179.99	
	θ_d (rad)	-3.1416—3.1416	
Mathematics		Direct, Δ ABS, $\Delta\%$	
Range	AC R	30m Ω /300m Ω /3 Ω /30 Ω /300 Ω /3k Ω	
	DC V	6V/60V	30V/300V
Max. input voltage		65V	350V
Test speed(time/s)		FAST: 50 times/s ; MED: 10 times/s SLOW1: 5 times/s; SLOW2: 3 times/s	
Comparator		10 bins	
Range mode		Auto, hold	
Trigger mode		Internal, manual, external, bus	
Operation mode		Test leads contact inspection; DUT I/V monitor; REL; short "0" ; 1-255 average; delay setting; graphic analysis and scanning; USB storage; Max.100 groups of file save/load; Statistics of Max.30000 of data	
General specification			
Operating environment	Temperature	0 $^\circ$ C -40 $^\circ$ C	
	Humidity	\leq 90%RH	
Power supply	Voltage	100V-120V , 198V-242V	
	Frequency	47Hz - 63Hz	
Power consumption		Max.15AV	

Micro Signal Type Tester

II. TH2689/TH2689A Capacitor Leakage Current/IR Meter

Features

- Capacitance leakage test function
- Insulation resistance test function
- Aluminum foil pressure and rise time test function
- Precise low current charge function(0.5mA±0.05mA)
- Large current (500mA)improves the charge speed of low voltage large capacitance.
Continuously adjust Test voltage(TH2689 1.0V~800V/ TH2689 1.0V~500V) and real-time monitor the output voltage
- Test range from 0.001uA—20.00mA, 4 digit display
- Open correction(null) to eliminate the remaining base number
- Built-in digit counter
- Comparator function to realize the sorting of PASS/FAIL
- 10 groups of status for save and load
- Standard RS232 interface, Handler interface, optional GPIB interface
- Large LCD (240×64 dot-matrix)display
- Humanized operation interface



RS232	HANDLER	GPIB
standard	standard	option

TH2689/A

Dimension (mm) : 350(W)×122(H)×425(D)
Weight: 7.7kg

Application

- Electrolytic capacitor leakage current test
- Ceramic Capacitor Insulation Test
- Film capacitor insulation test
- Surge diode, Zener diode, neon lamp, etc. operating voltage confirmation and leakage current test
- Work as high voltage low power DC power supply

Specifications

Parameter	LC, IR, Tr, Vt
Range	AUTO, HOLD
Trigger mode	INT/MAN/EXT/BUS
Sorting	High, Low, Pass with beeper alarm
Setting storage	10 groups of status can be saved and loaded
Communication interface	RS232 GPIB(optional) SCPI command program supportable
Performance parameter: (condition, working temperature: 0°C—40°C, humidity : 90%RH, warmup time≥20 min)	
LC/IR test	
Test voltage	TH2689 : 1.0V — 800V; TH2689A: 1.0V — 500V Accuracy : ±(0.5% set value+0.2V)
Charge current	test voltage ≤100V, 0.5mA—500mA; test voltage > 100V, 0.5mA—Imax, Imax=50W/test voltage Accuracy : ±(3% set value+0.05mA)
Test range	LC: 0.001uA — 20.00mA IR: 0.01kΩ — 99.99GΩ
Basic accuracy	LC: ±(0.3%+0.05uA)
Charge time upper limit	0 — 999s manual
Test time	FAST: 40ms MED : 60ms SLOW: 120ms Test condition: range is locked, trigger mode is EXT and the external trigger voltage displays the closing state
Limit setting	LC: 0 — 999.999mA; IR: 0 — 999.999GΩ
Sorting	Pass, Fail
W.V. test	
Vf Rated involucra voltage	TH2689 : 1.0V — 800V; TH2689A: 1.0V — 500V
Charge current	0.5mA — Imax Imax = 65W/Vf Accuracy: ± (3% set value+0.05mA)
Charge time upper limit	5s — 600s manual
Pressure time	30s — 600s manual

Standard Accessories

TH26003	2 terminal test fixture
TH26004D	3 terminals test clip leads

Power Electric Tester

III. TH6200 Series DC Power Supply

Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and double range output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel
- Powerful programming ability
100 groups of setting state memory saving and calling 10 trigger files, 100 test sequences per file, loop output of programming
- Timing output: time (0.1-99999.9s)
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Panel function button with backlight display
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Copy screen function
- Over voltage, over current protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Software monitoring via computer
Upgrade instrument firmware via USB flash



RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

TH6200 Series

Rack mount (mm): 215(W) x 88(H) x 396(D)
Dimension (mm): 236(W) x 111(H) x 426(D)
Net weight: 8.1 kg

Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

Specifications

Model	TH6201		TH6202		TH6203		TH6212		TH6213			
Channel/Range	Range1	Range2	Range1	Range2	Range1	Range2	Range1	Range2	Range1	Range2		
Rated output (0°C-40°C)	Voltage	0-20V	0-8V	0-32V	0-15V	0-72V	0-32V	0-32V	0-15V	0-72V	0-32V	
	Current	0-5A	0-10A	0-3A	0-6A	0-1.5A	0-3A	0-6A	0-12A	0-3A	0-6A	
	Power	100W	80W	96W	90W	108W	96W	192W	180W	216W	192W	
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 4mV		≤0.01% + 3mV		≤0.01% + 3mV		≤0.01% + 6mV		≤0.01% + 5mV		
	Current	≤0.01% + 2mA						≤0.01% + 5mA		≤0.01% + 4mA		
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 4mV		≤0.01% + 3mV		≤0.01% + 3mV		≤0.01% + 6mV		≤0.01% + 5mV		
	Current	≤0.01% + 2mA						≤0.01% + 5mA		≤0.01% + 4mA		
Programming resolution	Voltage	1mV										
	Current	0.1mA										
Read-back value resolution	Voltage	1mV										
	Current	0.1mA										
Year accuracy (25°C ± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.04% + 8mV									
		Current	≤0.1% + 5mA									
	Read-back	Voltage	≤0.04% + 8mV									
		Current	≤0.1% + 5mA									
Ripple and Noise (20Hz-20MHz)	Normal mode voltage	≤3mVp-p/1mVrms		≤4mVp-p/1mVrms		≤3mVp-p/1mVrms		≤4mVp-p/1mVrms				
	Normal mode current	<9mArms		<7mArms		<6mArms		<10mArms		<8mArms		
	Common mode current	<1.5μArms										
Transient response	<50μS (the time required for the output returns within 75mV when the output current changes from full scale to half or from half to full scale)				<50μS (the time required for the output returns within 120mV when the output current changes from full scale to half or from half to full scale)				<50μS (the time required for the output returns within 75mV when the output current changes from full scale to half or from half to full scale)			
Rise time (10% — 90%)	<90ms				<120ms				<180ms			
Fall time (90% — 10%)	<150ms		<200ms		<250ms		<350ms		<250ms			
Series and parallel set value accuracy	Voltage	-----										
	Current	-----										
Timer	0.1 ~ 99999.9 seconds											
Memory	10 groups of trigger output, 100 steps for each group, 100 sets of setting memory											

Standard Accessories

- YT3007 Test Cable(only TH6203)
- YT3008 Test Cable

Power Electric Tester

III. TH6300 Series DC Power Supply

Features

- 480x272 pixels, 24-bit color, 4.3-inch color TFT LCD screen for setting test conditions and display of testing results, etc.
- Digital keyboard and knob operation, simple and fast
- High accuracy, high resolution, low ripple and low noise
- Support shutdown data saving and boot data loading
- Support voltage test function
- Support data saving and callback
- List setting and step output
- Intelligent fan control to save energy and reduce noise
- Software control and detection via computer
- Interface: RS232, USB, GPIB (optional)



RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

TH6303 Series

Rack mount (mm): 215(W) x 88(H) x 412(D)
 Dimension (mm): 235(W) x 111(H) x 440(D)
 Net weight: 8.1kg

Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

Specifications

Modle		TH6301	TH6302	TH6303	TH6304	TH6312	TH6313	TH6314	TH6323	TH6324
Rated output	Voltage	20V	30V	60V	120V	30V	60V	120V	60V	120V
	Current	30A	20A	10A	5A	30A	15A	6A	25A	10A
	Power	200W	200W	200W	200W	360W	360W	360W	600W	600W
Load regulations≤	Voltage	0.01%+20mV	0.01%+20mV	≤0.01%+5mV	≤0.01%+5mV	0.01%+20mV	≤0.01%+8mV	≤0.01%+8mV	≤0.01%+15mV	0.01%+15mV
	Current	0.01%+20mA	0.01%+ 15mA	≤0.01%+4mA	≤0.01%+4mA	0.01%+20mA	≤0.01%+6mA	≤0.01%+6mA	≤0.01%+10mA	0.01%+10mA
Power regulations≤	Voltage	0.01%+20mV	0.01%+ 20mV	≤0.01%+5mV	≤0.01%+5mV	0.01%+20mV	≤0.01%+8mV	≤0.01%+8mV	≤0.01%+15mV	0.01%+15mV
	Current	0.01%+20mA	0.01%+ 15mA	≤0.01%+4mA	≤0.01%+4mA	0.01%+20mA	≤0.01%+6mA	≤0.01%+6mA	≤0.01%+10mA	0.01%+10mA
Set value resolution	Voltage	1mV(< 100V), 10mV(> 100V)								
	Current	0.1mA(< 10A), 1mA(> 10A)								
Read-back resolution	Voltage	1mV(< 100V), 10mV(> 100V)								
	Current	0.1mA(< 10A), 1mA(> 10A)								
Year set accuracy (25°C±5°C)≤	Voltage	0.05%+10mV	0.05%+10mV	0.05%+10mV	0.05%+15mV	0.05%+10mV	0.05%+10mV	0.03%+15mV	0.05%+10mV	0.05%+15mV
	Current	0.1%+30mA	0.1%+20mA	0.1%+10mA	0.1%+20mA	0.1%+30mA	0.1%+15mA	0.1%+20mA	0.1%+25mA	0.1%+25mA
Year read-back accuracy (25°C±5°C)≤	Voltage	0.05%+10mV	0.05%+10mV	0.05%+10mV	0.05%+15mV	0.05%+10mV	0.05%+10mV	0.03%+15mV	0.05%+10mV	0.05%+15mV
	Current	0.1%+30mA	0.1%+20mA	0.1%+10mA	0.1%+20mA	0.1%+30mA	0.1%+15mA	0.1%+20mA	0.1%+25mA	0.1%+25mA
Ripple and Noise (20Hz~20MHz)≤	Differential mode voltage	15mVpp	15mVpp	15mVp-p	20mVp-p	15mVpp	15mVp-p	20mVpp	20mVp-p	25mVp-p
	Differential mode current	10mArms	10mArms	8mArms	10mArms	12mArms	10mArms	12mArms	13mArms	15mArms
Rise times≤	10%-90%	100ms	100ms	150ms	150ms	100ms	150ms	150ms	150ms	150ms
Fall times≤	90%-10%	2s	2s	2s	3.5s	2s	2s	3.5s	2s	3.5s
Memory		10 sets of trigger output, 100 steps per group, 100 groups of set memory								
Output		Support front and rear panel output, the maximum output current of front terminal is 10A								

Standard Accessories

YT3008 Test Cable

Power Electric Tester

III. TH6400 Series DC Power Supply

Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and triple channel output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel
- Programmable output of voltage and current
- Timing output: time (0.1-99999.9s)
- Three-channel independent adjustment
- Simultaneously display of voltage, current, power and timing output time for three-channel
- Support series, parallel or synchronous output between channels
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Fully isolated circuit and support positive and negative reverse connection
- Copy screen function
- Over voltage protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Upgrade instrument firmware via USB flash
- Software monitoring via computer



RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

(TH6402A only USB HOST)

TH6402

Rack mount (mm): 215(W) x 88(H) x 457(D)
Dimension (mm): 235(W) x 105(H) x 487(D)
Net weight: 13kg

Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

Specifications

Model		TH6402A			TH6402			TH6412			TH6413			
	Channel/Range	Range1	Range2	Range3	Range1	Range2	Range3	Range1	Range2	Range3	Range1	Range2	Range3	
Rated output (0°C-40°C)	Voltage	0-30V			0-30V			0-30V			0-60V			
	Current	0-3A			0-3A			0-5A			0-3A			
	Power	90W			90W			30W			180W			
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			≤0.01% + 3 mV									
	Current	≤0.1% + 3 mA			≤0.01% + 3 mA									
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			≤0.01% + 3 mV									
	Current	≤0.1% + 3 mA			≤0.01% + 3 mA									
Programming resolution	Voltage	10mV			1mV									
	Current	1mA			0.1mA									
Read-back value resolution	Voltage	10mV			1mV									
	Current	1mA			0.1mA									
Year accuracy (25°C ± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.05% + 20 mV			≤0.03% + 10 mV						≤0.1%+5mA		≤0.1%+8mA
		Current	≤0.2%+5mA			≤0.1%+5mA			≤0.1%+8mA			≤0.1%+5mA		≤0.1%+8mA
	Read-back	Voltage	≤0.05% + 20 mV			≤0.03% + 10 mV						≤0.1%+5mA		≤0.1%+8mA
		Current	≤0.2%+5mA			≤0.1%+5mA			≤0.1%+8mA			≤0.1%+5mA		≤0.1%+8mA
Ripple and Noise (20Hz-20MHz)	Normal mode voltage	≤1mVrms/ 3mVp-p						≤1mVrms / 4mVp-p						
	Normal mode current	≤3mArms						≤5mArms			≤4mArms		≤5mArms	
	Common mode current	-----												
Series and parallel set value accuracy	Voltage	≤0.02% + 5 mV									≤0.02% + 10mV			
	Current	≤0.1% + 20mA						≤0.1% + 30mA						
Timer	0.1 ~ 99999.9 seconds													
Memory	40 groups of settings files / channels													

Standard Accessories

YT3007 Test Cable

YT3008 Test Cable

Power Electric Tester

III. TH6402B Quadruple Programmable DC Power Supply

Features

- Fresh and simple system settings with Chinese and English operation interfaces
- High resolution: 24-bit color 4.3-inch TFTLCD, resolution: 480 x 272
- Linear design and four channel output
- High precision and high stability, low ripple and low noise
- 1/2 2U super mini size and output and sampling terminal on the front and rear panel (The channel only supports front panel output)
- Programmable output of voltage and current
- Timing output: time (0.1-99999.9s)
- Four-channel independent adjustment
- Simultaneously display of voltage, current, power and timing output time for four-channel
- Support series, parallel or synchronous output between channels
- Use rotary knob and numeric keyboard to set the voltage, current and output time
- Remote measurement function, compensation for line voltage drop
- Output control switch
- Fully isolated circuit and support positive and negative reverse connection
- Copy screen function
- Over voltage protection
- Intelligent temperature control fan
- Support standard SCPI communication protocol
- Upgrade instrument firmware via USB HOST
- Software monitoring via computer



RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

TH6402B

Rack mount (mm): 215(W) x 88(H) x 473(D)
 Dimension (mm): 235(W) x 111(H) x 501(D)
 Net weight: 12kg

Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

Specifications

Model		TH6402B			
Channel/Range		Channel1	Channel2	Channel3	Channel4
Rated output (0°C- 40°C)	Voltage	0-30V		0-10V	0-5V
	Current	0-3A		0-3A	0-1A
	Power	90W		30W	5W
Load regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			
	Current	≤0.01% + 3 mA			
Power regulation ± (% Output + Bias)	Voltage	≤0.01% + 3 mV			
	Current	≤0.01% + 3 mA			
Programming resolution	Voltage	1mV			
	Current	0.1mA			
Read-back value resolution	Voltage	1mV			
	Current	0.1mA			
Year accuracy (25°C ± 5°C) ± (% Reading + Bias)	Programming	Voltage	≤0.1% + 20 mV		
		Current	≤0.2%+5mA		
	Read-back	Voltage	≤0.1% + 20 mV		
		Current	≤0.2%+5mA		
Ripple and Noise (20Hz-20MHz)	Normal mode voltage	≤1mVrms/ 3mVp-p			
	Normal mode current	≤3mArms			
Series and parallel set value accuracy	Voltage	≤0.02% + 10 mV			
	Current	≤0.2% + 20 mA			
Timer	0.1 ~ 99999.9 seconds				
Memory	40 groups of settings files / channels				

Standard Accessories

- YT3007 Test Cable
- YT3008 Test Cable

Power Electric Tester

III. TH6500 Series DC Power Supply

Features

- 24-bit color 4.3-inch color LCD display
- LCD resolution 480*272
- Numeric keypad operation
- Low ripple and low noise
- Intelligent fan control to save energy and reduce noise
- Software monitoring via computer
- Editable voltage and current output waveform with time (resolution 1ms) (LBT mode)
- The power output can be turned on and off by an external signal
- The knob can be used to coarsely adjust and fine tune the voltage and current values.
- High accuracy and resolution: 0.1mV/0.01mA
- Timing output time can be set (0.01-9999.99S)
- Screen information can be stored in the USB flash drive
- Chinese and English user interface
- Flexible and convenient file operating system
- Built-in 5 1/2 digital milliohm meter
- Automatic upgrade of instrument operating software via USB HOST
- Handler interface for online operations
- RS232, USB HOST, USB Device, GPIB can easily realize the data communication with PC and remote control of the instrument
- Comes with hardware OVP, OCP protection (OCP is software protection)
- Front panel and rear panel with output and sampling terminals, voltage and resistance measuring terminal
- Support standard SCPI and MODBUS communication protocols



RS232	USB HOST	USB DEVICE	GPIB
standard	standard	standard	option

TH6513

Rack mount (mm): 215(W) x 88(H) x 412(D)
 Dimension (mm): 235(W) x 111(H) x 440(D)
 Net weight: 8.1kg

Application

- R & D and design verification common test
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- New power car simulation test
- Teaching laboratory

Specifications

Mode		TH6501	TH6502	TH6503	TH6511	TH6512	TH6513
Rated output	Voltage	0-20V	0-32V	0-72V	0-20V	0-32V	0-72V
	Current	0-5A	0-3A	0-1.5A	0-10A	0-6A	0-3A
	Power	100W	96W	108W	200W	192W	216W
Load regulation	Voltage	≤0.01%+2mV					
	Current	≤0.05%+1.5mA					
Power regulation	Voltage	≤0.01%+1mV					
	Current	≤0.05%+1mA					
Set value resolution	Voltage	1mV					
	Current	0.1mA					
Read-back resolution	Voltage	0.1mV					
	Current	0.01mA					
Year set accuracy (25°C±5°C)	Voltage	≤0.03%+3mV					
	Current	≤0.05%+2mA					
Year read-back accuracy(25°C±5°C)	Voltage	≤0.02%+3mV					
	Current	≤0.05%+2mA				≤0.05%+2.5mA	
Ripple and Noise (20Hz-20MHz)	Differential mode voltage	≤3mVp-p and 1mVrms			≤4mVp-p and 1mVrms		
	Differential mode current	<3mArms			<4mArms		
Dynamic recovery time (50%-100% LOAD)	Restore to time within 75mv	<200us					
Rise time	10%-90%	<20ms					
Fall time	90%-10%	<200ms	<250ms	<150ms	<200ms	<250ms	<150ms
	Range (Typical)	1-19V	1-31V	1-71V	1-19V	1-31V	1-71V
Overvoltage protection	Accuracy (typical)	± (set value *0.5%+0.5V)					
	Response time (typical)	<10ms					
DVM(DC)	Display value accuracy	±0.02%+10mv					
	Display resolution	0.1mv					
	Input differential mode voltage range	0-40Vpk					
	Input common mode voltage range	0-30Vpk					

Standard Accessories

- YT3007 Test Cable(only TH6502/TH6503/TH6513)
 YT3008 Test Cable(only TH6501/TH6511/TH6512)

Power Electric Tester

III. TH6700 Series Programmable Switch DC Power Supply

Features

- Wide range, and constant power output
- High efficiency and high power density
- Programmable internal resistance, designed for battery output simulation
- Constant current (CC) priority mode, prevent overshoot for LED power supply
- Master-slave series and parallel operation
- 24-bit 4.3-inch color LCD display
- Numeric keyboard operation
- Voltage and current adjustment with knob
- Timed output (0-3600.0s)
- programmable voltage or current rising time
- RS232, USB HOST, USB DEVICE, LAN, and analog control interface



TH6700

Rack mount (mm): 215(W) x 132(H) x 420(D) Net weight : 7.5kg
 Dimension (mm): 215(W) x 146(H) x 420(D)

RS232	LAN	Analog Control Interface	USB HOST	USB DEVICE
standard	standard	standard	standard	standard

Application

- R & D and design verification common test
- Clean energy, solar cells, electric vehicles
- Production line table routine testing and maintenance
- Automated device integration testing
- Solar photovoltaic simulation test
- Teaching laboratory
- LED test

Specifications

Parameter	TH6711	TH6712	TH6713	TH6721	TH6722	TH6723	TH6731	TH6732	TH6733	TH6741	TH6742	TH6743	
Rated Output	Rated Power	360W	720W	1080W	360W	720W	1080W	360W	720W	1080W	360W	720W	1080W
	Max Power	Rated output *105%											
	Rated Voltage	0-30V	0-30V	0-30V	0-80V	0-80V	0-80V	0-250V			0-800V		
	Max Voltage	31.5V			84V			262.5V			840V		
	Rated Current	0-33A	0-66A	0-100A	0-12.5A	0-25A	0-37.5A	4.2A	8.4A	12.6A	1.32A	2.64A	3.96A
Setting	Max Current	36A	72A	108A	13.5A	27A	40.5A	4.5A	9A	13.5A	1.44A	2.88A	4.32A
	Voltage Range	0-31.5V			0-84V			0-262.5V			0-840V		
Load Regulation	Current Range	0-36A	0-72A	0-108A	0-13.5A	0-27A	0-40.5A	0-4.5A	0-9A	0-13.5A	0-1.44A	0-2.88A	0-4.32A
	Voltage	≤20mV			≤45mV			≤130mV			≤405mV		
Line Regulation	Current	≤41mA	≤77mA	≤113mA	≤18.5mA	≤32mA	≤45.5mA	≤9.5mA	≤14mA	≤18.5mA	≤6.44mA	≤7.88mA	≤9.32mA
	Voltage	≤18mV			≤43mV			≤128mV			≤403mV		
Set Value Resolution	Current	≤41mA	≤77mA	≤113mA	≤18.5mA	≤32mA	≤45.5mA	≤9.5mA	≤14mA	≤18.5mA	≤6.44mA	≤7.88mA	≤9.32mA
	Voltage	10mV			10mV			100mV			10mV		
Readback Value Resolution	Current	10mA	10mA	100mA	10mA	10mA	10mA	1mA	1mA	10mA	1mA	1mA	1mA
	Voltage	10mV			10mV			100mV			10mV		
Set Value Accuracy (25°C±5°C)	Voltage (>0.1V)	≤0.1%+10mV						≤0.1%+200mV			≤0.1%+400mV		
	Current (>0.1A)	≤0.1%+30mA	≤0.1%+60mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA	≤0.1%+6mA
Readback Value Accuracy (25°C±5°C)	Voltage (>0.1V)	≤0.1%+20mV						≤0.1%+200mV			≤0.1%+400mV		
	Current (>0.1A)	≤0.1%+40mA	≤0.1%+70mA	≤0.1%+100mA	≤0.1%+20mA	≤0.1%+40mA	≤0.1%+50mA	≤0.1%+5mA	≤0.1%+10mA	≤0.1%+20mA	≤0.1%+2mA	≤0.1%+4mA	≤0.1%+6mA
"Ripple and Noise (20Hz-2MHz)"	Differential Mode Voltage	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤60mVp-p and 7mVrms	≤80mVp-p and 11mVrms	≤100mVp-p and 14mVrms	≤80mVp-p and 15mVrms	≤100mVp-p and 15mVrms	≤120mVp-p and 15mVrms	≤150mVp-p and 30mVrms	≤200mVp-p and 30mVrms	≤200mVp-p and 30mVrms
	Differential Mode Current	≤72mA	≤144mA	≤216mA	≤27mA	≤54mA	≤81mA	≤10mA	≤20mA	≤30mA	≤5mA	≤10mA	≤15mA

Power Electric Tester

III. TH6700 Series Programmable Switch DC Power Supply

Specifications

"Dynamic Recovery Time (50%-100% Load) Load Frequency =100Hz"	Recover to 0.1% + 10mV: ≤2ms										≤2ms				
Rise Time (Full Load)	10%-90%	≤50ms								≤100ms			≤150ms		
Rise Time (No Load)	10%-90%	≤50ms								≤100ms			≤150ms		
Drop Time (Full Load)	90%-10%	≤50ms								≤150ms			≤300ms		
Drop Time (No Load)	90%-10%	≤500ms								≤1200ms			≤2000ms		
Timer	Setting Range	0-9999999 (Hour, Minute, Second)										0-9999999 (Hour, Minute, Second)			
Start Delay	Setting Range	0-99.99s										0-99.99s			
Stop Delay	Setting Range	0-99.99s										0-99.99s			
Slope Setting	Voltage Rise	0.01-60V/s					0.1-160V/s			0.1-500V/s			1-1600V/s		
	Voltage Drop	0.01-60V/s					0.1-160V/s			0.1-500V/s			1-1600V/s		
	Current Rise	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s		
	Current Drop	0.01-72A/s	0.1-144A/s	0.1-216A/s	0.01-27A/s	0.01-54A/s	0.01-81A/s	0.001-9A/s	0.01-18A/s	0.01-27A/s	0.001-2.88A/s	0.001-5.76A/s	0.001-8.64A/s		
Analog Internal Resistance	Setting Range	0-0.833Ω	0-0.417Ω	0-0.278Ω	0-5.926Ω	0-2.963Ω	0-1.975Ω	0-55.55Ω	0-27.77Ω	0-18.51Ω	0-555.5Ω	0-277.8Ω	0-185.1Ω		
"External Voltage Control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±0.5%										Rated Output Voltage±0.5%			
	CC Accuracy	Rated Output Current±1%										Rated Output Current±1%			
"External resistance control (25°C±5°C)"	CV Accuracy	Rated Output Voltage±1.5%										Rated Output Voltage±1.5%			
	CC Accuracy	Rated Output Current±1.5%										Rated Output Current±1.5%			
Power Factor	100VAC (Full Load)	0.99										0.99			
	200VAC (Full Load)	0.97										0.97			
Efficient	100VAC (Full Load)	75%				76%			77%			78%			
	200VAC (Full Load)	77%				78%			79%			80%			
Master-Slave Control	Master-Slave Parallel	3 Sets including the mater tester										3 Sets including the mater tester			
	Master-Slave Series	2 Sets including the mater tester										Not Available			
Protection	OVP	3-33V	3-33V	3-33V	8-88V	8-88V	8-88V	20-275V			20-880V				
	Accuracy	N/A										±2% Rated Output Voltage			
	OCP	3.6-37.8A	5-75.6A	5-113.4A	1.35-14.18A	2.7-28.35A	4.05-42.53A	0.45-4.72A	0.9-9.45A	1.35-14.17A	0.144-1.512A	0.288-3.024A	0.432-4.536A		
	Accuracy	N/A										±2% Rated Output Current			
	OTP	Internal Temperature Rise Determines										Internal Temperature Rise Determines			
Size and Weight	Overall Size (mm)	215(W)×146(H)×420(D)													
	Shelf Size (mm)	215(W)×132(H)×420(D)													
	Net Weight	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg	3kg	5.3kg	7.5kg		
Power Supply	88-265VAC, 50/60HZ										88-265VAC, 50/60Hz				

"Note: Power regulation rate (88-132VAC or 170-265VAC, constant load).

Load regulation rate (no load - full load, constant input voltage).

Rise time (10%-90% of rated output voltage, with rated resistive load)

Drop time (90%-10% of rated output voltage, with rated resistive load)

Dynamic recovery time (when the load changes from 50% to 100% of the rated output current, the time for the output voltage to recover within the range of 0.1%+10mV of the rated output"

Power Electric Tester

III. TH6900 Series Programmable DC Power Supply

Features

- The output range is 3 times of the equal power "rectangular" power supply
- High frequency LLC multi-resonant inverter, the efficiency of the whole machine is as high as 93%
- Active PFC, power factor up to 0.99
- High resolution, high precision; low ripple, low noise
- ≤2ms fast transient response
- The rising edge and falling edge speed of the output are adjustable
- Power supply constant voltage (CV), constant current (CC), constant power (CP) mode
- The master-slave mode supports parallel connection, active current sharing, and parallel connection of up to 10 units of the same type
- OVP, OCP, OPP, OTP, input undervoltage protection, SENSE terminal reverse connection protection
- Built-in function generator
- Equipped with discharge circuit (Uout< 10V within 1s)
- Separate control of power output through external analog interface
- High-brightness color LCD display
- Flexible and powerful sequence test function
- Support SCPI command language
- Interface: RS232, USB HOST,
Optional (RS485, CAN, GPIB, LAN, analog control interface)

Application

- General testing for R&D and design verification
- New energy solar cells, new power vehicles, electric bicycles
- Routine test and maintenance of production line workbench
- Automated device integration testing
- Solar photovoltaic simulation test
- Teaching laboratory
- LED test

Specifications

Parameter	Model	TH6940-60	TH6980-30	TH69200-12.5	TH69360-7.5	TH69500-5	TH69750-3	TH691000-2.5	
Rated Output	Voltage	40V	80V	200V	360V	500V	750V	1000V	
	Current	60A	30A	12.5A	7.5A	5A	3A	2.5A	
	Power	750W							
	Efficient	≤92%	≤92%	≤92%	≤93%	≤93%	≤93%	≤93%	
Load Regulation Rate	Voltage	<=0.05%FS (0-100% Load Regulation Rate)							
	Current	<=0.15%FS (0-100%ΔUDC Load Regulation Rate)							
Line Regulation Rate	Voltage	<=0.02%FS (±10%ΔUAC Input)							
	Current	<=0.05%FS (±10%ΔUAC Input)							
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV	
	Current	10mA	10mA	10mA	1mA	1mA	1mA	1mA	
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV	
	Current	10mA	10mA	10mA	1mA	1mA	1mA	1mA	
Set Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)							
	Current	≤±(0.15%+0.1%FS)							
	Power	≤±0.8%FS							
Readback Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)							
	Current	≤±(0.15%+0.1%FS)							
	Power	≤±0.8%FS							
"Ripple and Noise (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms	
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp	
Rise Time (No Load)	10%-100%	≤2ms							
Rise Time (Full Load)	10%-90%	≤30ms							
Protection		OTP, OVP, OCP, OPP, PF							



TH6900

Rack mount (mm): 482(W) x 88(H) x 455(D)
Net weight : 13.5kg

RS232

standard

USB HOST

standard

Brief Introduction

■ TH6900 series is a programmable switching DC power supply with a wide range of output. There are 21 models of 750W, 1500W and 3000W available. The instrument supports up to 10 master-slave units of the same model in parallel to meet higher output current and output power requirements.

TH6900 series supports sequence test function, allowing users to set a series of voltage, current, power, and automatically output according to the set rules, to better meet the user's application of automatic test and burn-in test. The instrument can store 50 sequences, each sequence contains 22 steps, the function of each step can be set independently, a total of 12 independent functions, including loop control, slope mode output and other rich control functions.

This instrument can output sine wave, square wave, triangle wave, trapezoidal wave, etc. according to the set parameters such as voltage and current. Based on these waveforms, users can form a sequence output. The sequence can be set up to ten steps, and each step can be set to any A waveform and the duration of the waveform, which is convenient for users to test products. In addition, the TH6900 power supply has a solar cell array simulation function. In addition to CC, CV, EN50530 and other modes output through the host computer software, the single machine also has a built-in model for simulating the output curve of the solar cell array.

This series of power supplies also have adjustable rising and falling edge speeds. In all modes (source CV, CC, CP), the rise and fall time can be set, and the setting range is 0.01S~999.99S.

Power Electric Tester

III. TH6900 Series Programmable DC Power Supply

Isolated Withstand Voltage		1000VDC (Output to Ground)
Master-Slave Control		Connect up to 10 products (via shared bus) with true master-slave operation
Storage		10 groups of working modes; 50 sequences, 20 steps per group
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated
	Signal Range	0-5V or 0-10V (Switchable)
	U/I/P Accuracy	0-10V: $\leq 0.2\%FS$ 0-5V: $\leq 0.4\%FS$
Communication Interface	Standard	RS232, USB HOST
	Optional	RS485, CAN, GPIB, LAN
Power Supply	Phase	1ph+N+PE
	Voltage	220VAC $\pm 10\%$
	Frequency	45-66Hz
	Power Factor	≥ 0.99
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.
Weight		9.6kg

Parameter	Model	TH6935-100	TH6980-60	TH69200-25	TH69360-15	TH69500-10	TH69750-6	TH691000-5	
Rated Output	Voltage	35V	80V	200V	360V	500V	750V	1000V	
	Current	100A	60A	25A	15A	10A	6A	5A	
	Power	1500W							
	Efficient	$\leq 92\%$	$\leq 92\%$	$\leq 92\%$	$\leq 93\%$				
Load Regulation Rate	Voltage	$\leq 0.05\%FS$ (0-100% Load Regulation Rate)							
	Current	$\leq 0.15\%FS$ (0-100% ΔUDC Load Regulation Rate)							
Line Regulation Rate	Voltage	$\leq 0.02\%FS$ ($\pm 10\%\Delta UAC$ Input)							
	Current	$\leq 0.05\%FS$ ($\pm 10\%\Delta UAC$ Input)							
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV	
	Current	10mA	10mA	10mA	10mA	10mA	1mA	1mA	
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV	
	Current	10mA	10mA	10mA	10mA	10mA	1mA	1mA	
Set Value Accuracy (25°C $\pm 5^\circ C$)	Voltage	$\leq \pm(0.05\%+0.04\%FS)$							
	Current	$\leq \pm(0.15\%+0.1\%FS)$							
	Power	$\leq \pm 0.8\%FS$							
Readback Value Accuracy (25°C $\pm 5^\circ C$)	Voltage	$\leq \pm(0.05\%+0.04\%FS)$							
	Current	$\leq \pm(0.15\%+0.1\%FS)$							
	Power	$\leq \pm 0.8\%FS$							
"Ripple and Noise (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms	
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp	
Rise Time (No Load)	10%-100%	$\leq 2ms$							
Rise Time (Full Load)	10%-90%	$\leq 30ms$							
Protection	OTP, OVP, OCP, OPP, PF								
Isolated Withstand Voltage		1000VDC (Output to Ground)							
Master-Slave Control		Connect up to 10 products (via shared bus) with true master-slave operation							
Storage		10 groups of working modes; 50 sequences, 20 steps per group							
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated							
	Signal Range	0-5V or 0-10V (Switchable)							
	U/I/P Accuracy	0-10V: $\leq 0.2\%FS$ 0-5V: $\leq 0.4\%FS$							
Communication Interface	Standard	RS232, USB HOST							
	Optional	RS485, CAN, GPIB, LAN							
Power Supply	Phase	1ph+N+PE							
	Voltage	220VAC $\pm 10\%$							
	Frequency	45-66Hz							
	Power Factor	≥ 0.99							
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m							
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.							
Weight		10.8kg							

Power Electric Tester

III. TH6900 Series Programmable DC Power Supply

Parameter	Model	TH6935-200	TH6980-120	TH69200-50	TH69360-30	TH69500-20	TH69750-12	TH691000-10
Rated Output	Voltage	35V	80V	200V	360V	500V	750V	1000V
	Current	200A	120A	50A	30A	20A	12A	10A
	Power	3000W						
	Efficient	≤92%	≤92%	≤92%	≤93%	≤93%	≤93%	≤93%
Load Regulation Rate	Voltage	≤0.05%FS (0-100% Load Regulation Rate)						
	Current	≤0.15%FS (0-100%ΔUDC Load Regulation Rate)						
Line Regulation Rate	Voltage	≤0.02%FS (±10%ΔUAC Input)						
	Current	≤0.05%FS (±10%ΔUAC Input)						
Set Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	10mA	10mA	10mA	10mA
Readback Value Resolution	Voltage	10mV	10mV	10mV	10mV	10mV	10mV	10mV
	Current	10mA	10mA	10mA	10mA	10mA	10mA	10mA
Set Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)						
	Current	≤±(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
Readback Value Accuracy (25°C±5°C)	Voltage	≤±(0.05%+0.04%FS)						
	Current	≤±(0.15%+0.1%FS)						
	Power	≤±0.8%FS						
"Ripple and Noise (20Hz-2MHz)"	RMS (20Hz-300kHz)	10mVrms	10mVrms	20mVrms	40mVrms	50mVrms	75mVrms	100mVrms
	P-P (20Hz-2MHz)	75mVpp	100mVpp	175mVpp	250mVpp	325mVpp	500mVpp	650mVpp
Rise Time (No Load)	10%-100%	≤2ms						
Rise Time (Full Load)	10%-90%	≤30ms						
Protection		OTP, OVP, OCP, OPP, PF						
Isolated Withstand Voltage		1000VDC (Output to Ground)						
Master-Slave Control		Connect up to 10 products (via shared bus) with true master-slave operation						
Storage		10 groups of working modes; 50 sequences, 20 steps per group						
Analog Interface	Specification	Built-in 15-pin D-Sub female connector, electrically isolated						
	Signal Range	0-5V or 0-10V (Switchable)						
	U/I/P Accuracy	0-10V: ≤0.2%FS 0-5V: ≤0.4%FS						
Communication Interface	Standard	RS232, USB HOST						
	Optional	RS485, CAN, GPIB, LAN						
Power Supply	Phase	1ph+N+PE						
	Voltage	220VAC±10%						
	Frequency	45-66Hz						
	Power Factor	≥0.99						
Working Environment		Indoor type; Working temperature: 0~50°C, Humidity: <80%, no condensation, Storage temperature: -20~70°C, Altitude: <2000m						
Size W×H×D(mm)		482mm×88mm×455mm (W×H×D) Standard Frame, 2U High.						
Weight		13.5kg						

Power Electric Tester

III. TH7100 Series Programmable AC Power Supply

Features

- 24-bit color 4.3-inch 480 × 272 color LCD screen, Chinese and English interfaces
- Linear output design
- Flexible and convenient operation: numeric keypad, coarse and fine adjustment knob
- Manual / program control mode output function, timing output function, dimming mode output function, surge and notch function
- Front panel output function
- Boot hold function
- Store setting parameters and test results
- Support USB to upgrade the instrument firmware
- Multiple protection modes: set the current protection (HI-A) Overvoltage Protection (OVP), Low Voltage Protection (LVP) Overcurrent protection (OCP), over power protection (OPP) Over temperature protection (OTP)
- Two-gear temperature to control fan speed
- Remote input and output functions:
Remote input: input control of 7 groups of memory
Remote output: PASS, FAIL, PROCESSING, internal output switch
- Memory capacity:
Manual: 50 groups
Program control: 50 groups, 9 steps / group



RS232	REMOTE	USB HOST	USB DEVICE	GPIB
standard	standard	standard	standard	option

TH7110

Dimension(mm): 430(W)×88(H)×600(D)

Weight: 40kg

Application

- Motors and transformers
- Electronic production design
- Lighting
- Aerospace military
- Network communication
- Audio and video equipment
- Monitoring equipment
- Power specifications simulation of different countries
- Electromagnetic compatibility equipment

Specifications

Model	TH7105	TH7110	TH7120		
Output parameters					
Rated power	500W	1000W	2000W		
Output voltage	0~300V				
Output frequency	45.0Hz~500Hz				
Maximum current (RMS)	0-150V	4.2A	8.4A	16.8A	
	0-300V	2.1A	4.2A	8.4A	
Maximum current (Peak)	0-150V	16.8A	33.6A	67.2A	
	0-300V	8.4A	16.8A	33.6A	
Total harmonic distortion (THD) at 45.0 ~ 500Hz, ≤ 0.5% (resistive load)					
Common parameters	Phase	1Ø/2W			
	Crest factor	≥4			
	Linearity adjustment rate	0.1%±10%			
	Load regulation	0.5%(resistive load)			
	Response time	<100uS			
Setting parameters					
Voltage	0 ~ 300V	Resolution	0.1V	Accuracy	±0.5%+2 digits
Frequency	45.0Hz ~ 500Hz		<100Hz: 0.1Hz; ≥100Hz: 1Hz		±0.02%
Initial / final phase angle	0 ~ 359°		1°		±1°(45 ~ 65Hz)
Measurement parameters					
Voltage	0 ~ 300V	Resolution	0.1V	Accuracy	±0.5%+2 digits
Frequency	45.0Hz ~ 500Hz		<100Hz: 0.1Hz; ≥100Hz: 1Hz		±0.1Hz
Current	0-150V	0.000 ~ 4.200A		0.000 ~ 16.800A	
	0-300V	0.000 ~ 2.100A		0.000 ~ 8.400A	
	Resolution	0.001A			
	Accuracy	±0.5%+5 digits			
Peak current	0-150V	0.00 ~ 12.6A		0.00 ~ 50.4A	
	0-300V	0.00 ~ 6.3A		0.00 ~ 25.2A	
	Resolution	0.01A			
	Accuracy	±5%+2 digits			
Power	Range	0 ~ 500W	0 ~ 1000W	0 ~ 2000W	
	Resolution	0.1W		0.1W(0 ~ 1000W);1W(1000 ~ 2000W)	
	Accuracy	±0.6%+5 digits			
Power factor	0.001-1.000	Resolution	0.001	Accuracy	±2%+2 digits

Power Electric Tester

III. TH8200 Series Programmable DC Electronic Load

Features

- Constant current (CC), constant resistance (CR), constant power (CV), constant power (CP) operation mode
- Current remote control monitoring function, external trigger function
- 1mV/10μA high resolution, ripple measurement function
- Dynamic current/voltage test, up to 50K dynamic frequency
- Voltage and current measurement can achieve high precision while testing speed up to 100KHZ
- Programmable soft start function
- CR-LED test, arbitrary I-V characteristics, battery test, dynamic scan test, load effect, list function and many other advanced functions
- Overvoltage (programmable), low voltage, over current (programmable), overpower (programmable), overheating, anti-reverse protection, etc.
- Remote voltage compensation input test function
- Short circuit function simulation
- The adoption of the Linux operating system makes the number of internal parameter file storages essentially unrestricted
- Perfect U disk function (parameter file storage and loading, interface screenshot, system firmware upgrade)
- Setting parameters support power-off memory function
- Intelligent temperature control fan
- RS232 (standard), USB (standard), Ethernet (standard), WIFI (optional)
- Matching with upper-computer software to achieve remote operation and monitoring matching



NEW

RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

Dimension(mm): 215mm(W)x143mm(H)x525mm(D)[TH8201/TH8202/A]
 Dimension(mm): 430mm(W)x143mm(H)x525mm(D)[TH8203/TH8204]
 Weight: 7.8kg[TH8201] / 9.1kg[TH8202] / 8.7kg[TH8202A]

Application

- Power
Chargers, switching power supply, communication power, LED drivers, cell phone batteries, portable power source
- New energy
Solar cells, new power cars, electric bicycles
- Electronic power components
Fuse / Connector / Relay / Sensor
- Automated equipment integration testing

Specifications

Model	TH8201	TH8202	TH8202A	TH8202B	TH8203	TH8203A	TH8204	TH8204A	TH8204B	TH8205	
Input power	175W	350W	350W	500W	700W	700W	1000W	1000W	1200W	2000W	
Input voltage	150V										
Input current	0-40A	0-80A	0-40A	0-60A	0-160A	0-80A	0-200A	0-100A	0-160A	0-200A	
Static mode	Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)										
Minimum operating voltage	1.5V@0.4A	1.5V@0.8A	1.5V@0.4A	1.5V@0.8A	1.5V@1.6A	1.5V@0.8A	1.5V@2A	1.5V@1A	1.5V@1.6A	1.5V@2A	
	1.5V@4A	1.5V@8A	1.5V@4A	1.5V@8A	1.5V@16A	1.5V@8A	1.5V@20A	1.5V@10A	1.5V@16A	1.5V@20A	
	1.5V@40A	1.5V@80A	1.5V@40A	1.5V@80A	1.5V@160A	1.5V@80A	1.5V@200A	1.5V@100A	1.5V@160A	1.5V@200A	
Constant voltage (CV)	Range	0-15V									
	Resolution	1mV									
	Range	0-150V									
	Resolution	10mV									
Constant current (CC)	Range	0-400mA	0-800mA	0-400mA	0-800mA	0-1.6A	0-0.8A	0-2A	0-1A	0-1.6A	0-2A
	Resolution	0.01mA	0.02mA	0.01mA	0.02mA	0.04mA	0.02mA	0.06mA	0.03mA	0.04mA	0.05mA
	Range	0-4A	0-8A	0-4A	0-8A	0-16A	0-8A	0-20A	0-10A	0-16A	0-20A
	Resolution	0.1mA	0.2mA	0.1mA	0.2mA	0.4mA	0.2mA	0.6mA	0.3mA	0.4mA	0.5mA
	Range	0-40A	0-80A	0-40A	0-80A	0-160A	0-80A	0-200A	0-100A	0-160A	0-200A
	Resolution	1mA	2mA	1mA	2mA	4mA	2mA	6mA	3mA	4mA	5mA
Constant resistance (CR)	Range	0.1%+0.1%FS									
	Range	0.04Ω-40Ω	0.02Ω-20Ω	0.04Ω-40Ω	0.02Ω-20Ω	0.018Ω-18Ω	0.036Ω-36Ω	0.015Ω-15Ω	0.03Ω-30Ω	0.018Ω-18Ω	0.015Ω-15Ω
	Range	0.4Ω-400Ω	0.2Ω-200Ω	0.4Ω-400Ω	0.2Ω-200Ω	0.072Ω-72Ω	0.144Ω-144Ω	0.06Ω-60Ω	0.12Ω-120Ω	0.072Ω-72Ω	0.06Ω-60Ω
	Range	4.0Ω-4000Ω	2.0Ω-2000Ω	4.0Ω-4000Ω	2.0Ω-2000Ω	1.8Ω-3000Ω	3.6Ω-3000Ω	1.5Ω-3000Ω	3Ω-3000Ω	1.8Ω-3000Ω	1.5Ω-3000Ω
Constant power (CP)	Resolution	Vin/Rset*0.2%+0.2%FS									
	Range	0-1.75W	0-3.5W	0-3.5W	0-5W	0-7W	0-7W	0-10W	0-10W	0-12W	0-20W
	Resolution	0.175mW	0.35mW	0.35mW	0.5mW	0.7mW	0.7mW	1mW	1mW	1.2mW	2mW
	Range	0-17.5W	0-35W	0-35W	0-50W	0-70W	0-70W	0-100W	0-100W	0-120W	0-200W
	Resolution	1.75mW	3.5mW	3.5mW	5mW	7mW	7mW	10mW	10mW	12mW	20mW
	Range	0-175W	0-350W	0-350W	0-500W	0-700W	0-700W	0-1000W	0-1000W	0-1200W	0-2000W
Resolution	17.5mW	35mW	35mW	50mW	70mW	70mW	100mW	100mW	120mW	200mW	
Precision	0.3%+0.3%FS										
Dimensions and weight											
Dimensions (mm)	215*129*479mm				430*129*479mm				430*129*479mm		
Weight(kg)	7.8kg	9.1kg	8.7kg	9.1kg	15.6kg	15.3kg	17.6kg	17.3kg	17.6kg	20kg	

Power Electric Tester

III. TH8200 Series Programmable DC Electronic Load

Model	TH8212	TH8214	TH8215	
Input power	500W	800W	1200W	
Input voltage	10-800V			
Input current	0-15A	0-30A	60A	
Static mode	Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)			
Minimum operating voltage	10V@0.15A	10V@0.3A	10V@0.6A	
	10V@1.5A	10V@3A	10V@6A	
	10V@15A	10V@30A	10V@60A	
Constant voltage (CV)	Range	0-80V		
	Resolution	5mV		
	Range	0-800V		
	Resolution	50mV		
Constant current (CC)	Precision	0.05%+0.05%FS		
	Range	0-0.15A	0-0.3A	0-0.6A
	Resolution	0.01mA	0.01mA	0.02mA
	Range	0-0.15A	0-3A	0-6A
	Resolution	0.1mA	0.1mA	0.2mA
	Range	0-15A	0-30A	0-60A
	Resolution	1mA	1mA	2mA
Precision	0.1%+0.1%FS			
Constant resistance (CR)	Range	0.3Ω-3kΩ	0.2Ω-2kΩ	0.15Ω-1.5kΩ
	Range	1.2Ω-12kΩ	0.8Ω-8kΩ	0.6Ω-6kΩ
	Range	30Ω-60kΩ	20Ω-40kΩ	15Ω-60kΩ
	Resolution			
Precision	Vin/Rset*0.2%+0.2%FS			
Constant power (CP)	Range	0-5W	0-8W	0-12W
	Resolution	0.5mW	0.8mW	1.2mW
	Range	0-50W	0-80W	0-120W
	Resolution	5mW	8mW	12mW
	Range	0-50W	0-800W	0-1200W
	Resolution	50mW	80mW	120mW
Precision	0.3%+0.3%FS			
Protection function: over power protection (OPP), over current protection (OCP), over voltage protection (OVP), over temperature protection (OTP), reverse voltage alarm (REV), under voltage protection (UVP)				
Short circuit function				
Interface: network port LAN, Handler port, USB Host, USB Device, parallel interface				
Power supply and safety				
Power supply	110/220VAC			
Power frequency	50/60Hz			
Safety certificate	CE			
Environment and temperature				
Operating temperature	0-40°C			
Storage temperature	-20-80°C			
Dimensions and weight				
Dimensions (mm)	215*129*479mm			
Weight (kg)	7.8kg--215*129*479mm	9.1kg--430*129*479mm	8.7kg-430*129*479mm	

Standard Accessories

YT3008 Test Cable

Power Electric Tester

III. TH8300 Series Programmable DC Electronic Load

Features

- 5-module/2-module frame
- Unit maximum power 2500W, maximum current 400A
- Module maximum power 500W, maximum current 80A, and maximum voltage 600V
- High resolution: 0.1mV/10μA
- Up to 50kHz dynamic frequency
- Up to 500kHz sampling speed
- 12 advanced test functions
- Modular design, support each module to operate independently
- Modular 40 files storage
- One single machine can support up to five modules in parallel and support up to ten channels
- Connect via CAN interface, support up to four complete machines online
- 24-bit 2.8-inch color LCD display
- Chinese and English operation interface
- Smart fan system
- Support power-on hold function
- Support timing function
- Electrical isolation, external input and output
- Support over current protection (OCP), over voltage protection(OVP), over power protection (OPP), over temperature protection(OTP), reverse polarity protection (REV), low voltage protection (LVP)



TH8300



NEW

TH8310

Application

- Power supply
Chargers, switching power supplies, communication power supplies, LED drivers, mobile phone batteries, power banks, etc.
- New energy
Solar cells, new power cars, electric bicycles
- Electronic power components
Fuse/connector/relay/sensor
- Automation equipment integration test

RS232	USB HOST	USB DEVICE	GPIO	LAN	CAN	SYSTEM I/O
standard	standard	standard	standard	standard	standard	standard

Dimension(mm): 477mm(W)x177mm(H)x590mm(D) Weight: 15kg
Dimension(mm): 142mm(W)x85.5mm(H)x550mm(D) Weight: 4.2kg

Specifications

Main machine		TH8300 Frame					TH8310 Frame				
Supported modules		5					2				
Interface		RS232, USB HOST, USB DEVICE, LAN, GPIO, SYSTEM I/O, CAN									
Storage		40 groups (50 groups of status memory)									
Power supply		90-130VAC or 175-253VAC (47-63Hz)									
Power consumption		Less than 300VA									
Temperature and environment	Operating temperature	0 degrees Celsius - 40 degrees Celsius									
	Operating humidity	10%-90% (non-condensing)									
	Storage temperature	-20 degrees Celsius -70 degrees Celsius									
	Altitude	Less than 2000m									
	Pollution degree	Pollution degree 2									
	Security Level	Safety Category II									
Size and Weight	Frame Size	480mm×177mm×590mm					260mm×177mm×590mm				
	Frame Weight	15kg					11kg				
Module Model		TH8301-80-20	TH8301A-80-20	TH8302-80-40	TH8303-80-60	TH8304-80-80	TH8305-80-80	TH8302-600-10	TH8303-600-15	TH8305-600-30	
Input Power		100W×2	200W×2	200W×1	300W×1	400W×1	500W×1	200W×1	300W×1	500W×1	
Input Voltage		0-80V						0-600V			
Input Current		0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A	0-30A	
Minimum operating voltage	0.5V@0.2A	0.5V@0.2A	0.5V@0.2A	0.5V@0.4A	0.5V@0.6A	0.4V@0.8A	0.4V@0.8A	2V@0.1A	2V@0.15A	2V@0.3A	
	0.5V@2A	0.5V@2A	0.5V@4A	0.5V@6A	0.4V@8A	0.4V@8A	2V@1A	2V@1.5A	2V@3A	2V@3A	
	0.5V@20A	0.5V@20A	0.5V@40A	0.5V@60A	0.4V@80A	0.4V@80A	2V@10A	2V@15A	2V@30A	2V@30A	
Standard Mode		Constant current (CC), constant resistance (CR), constant voltage (CV), constant power (CP)									
Constant voltage (CV)	Range/Resolution	6V/0.1mV, 16V/1mV, 80V/1mV						80V/1mV, 150V/10mV, 600V/10mV			
	Accuracy	0.05%+0.1%FS									

Power Electric Tester

III. TH8300 Series Programmable DC Electronic Load

Constant current (CC)	Range	0-0.2A	0-0.2A	0-0.4A	0-0.6A	0-0.8A	0-0.8A	0-0.1A	0-0.15A	0-0.3A	
	Resolution	0.01mA	0.01mA	0.01mA	0.01mA	0.01mA	0.01mA	0.005mA	0.005mA	0.005mA	
	Range	0-2A	0-2A	0-4A	0-6A	0-8A	0-8A	0-1A	0-1.5A	0-3A	
	Resolution	0.1mA	0.1mA	0.1mA	0.1mA	0.1mA	0.1mA	0.05mA	0.05mA	0.05mA	
	Range	0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A	0-30A	
	Resolution	1mA	1mA	1mA	1mA	1mA	1mA	0.5mA	0.5mA	0.5mA	
	Accuracy	0.1%+0.1%FS									
Constant resistance (CR)	Range	0.04-80Ω (100W/6V)	0.04-80Ω (100W/6V)	0.02-40Ω (200W/6V)	0.015-30Ω (300W/6V)	0.01-20Ω (400W/6V)	0.01-20Ω (400W/6V)	0.2-400Ω (200W/80V)	0.133-270Ω (300W/80V)	0.133-270Ω (500W/80V)	
		1.44-2.9kΩ (100W/16V)	1.44-2.9kΩ (100W/16V)	0.8-1.5kΩ (200W/16V)	0.3-600Ω (300W/16V)	0.36-720Ω (400W/16V)	0.36-720Ω (400W/16V)	3-6kΩ (200W/150V)	1.92-4kΩ (300W/10V)	1.92-4kΩ (500W/150V)	
		5.76-12kΩ (100W/80V)	5.76-12kΩ (100W/80V)	3-6kΩ (200W/80V)	1.5-3kΩ (300W/80V)	1.45-2.9kΩ (400W/80V)	1.45-2.9kΩ (400W/80V)	300-300kΩ (200W/600V)	208-200kΩ (300W/600V)	208-200kΩ (500W/600V)	
	Resolution	0.1Ω									
Accuracy	1%										
Constant power (CP)	Range	0-2W	0-4W	0-4W	0-6W	0-8W	0-10W	0-4W	0-6W	0-10W	
	Resolution	1mW	2mW	2mW	3mW	4mW	5mW	2mW	3mW	5mW	
	Range	0-10w	0-20w	0-20w	0-30w	0-40w	0-50w	0-20W	0-30w	0-50w	
	Resolution	10mW	20mW	20mW	30mW	40mW	50mW	20mW	30mW	50mW	
	Range	0-100w	0-200w	0-200w	0-300w	0-400w	0-500w	0-200W	0-300w	0-500w	
	Resolution	100mW	200mW	200mW	300mW	400mW	500mW	200mW	300mW	500mW	
Accuracy	1%										
Advanced mode	Dynamic test, dynamic frequency scan, CR-LED test, battery test, time test, MPPT test, OCPT test, OVPT test, OPPT test, sine wave test, list test, automatic test										
Dynamic mode-constant current mode											
Minimum working voltage	1.5V							3V			
Frequency	Range	100Hz-50kHz/0.01Hz-1kHz									
	Accuracy	1μs/1ms+100ppm									
	Duty cycle	1-99% (Minimum rise time controlled)									
Slope	Range	0.04A/ms-0.02A/μs	0.04A/ms-0.02A/μs	0.08A/ms-0.04A/μs	0.12A/ms-0.06A/μs	0.16A/ms-0.08A/μs	0.16A/ms-0.08A/μs	0.02A/ms-0.01A/μs	0.03A/ms-0.015A/μs	0.06A/ms-0.03A/μs	
		Resolution	0.01mA/μs							0.005mA/μs	
	Range	0.4A/ms-0.2A/μs	0.4A/ms-0.2A/μs	0.8A/ms-0.4A/μs	1.2A/ms-0.6A/μs	1.6A/ms-0.8A/μs	1.6A/ms-0.8A/μs	0.2A/ms-0.1A/μs	0.3A/ms-0.15A/μs	0.6A/ms-0.3A/μs	
		Resolution	0.1mA/μs							0.05mA/μs	
	Range	4A/ms- 2A/μs	4A/ms- 2A/μs	8A/ms- 4A/μs	12A/ms- 6A/μs	16A/ms- 8A/μs	16A/ms- 8A/μs	2A/ms- 1A/μs	3A/ms- 1.5A/μs	6A/ms- 3A/μs	
	Resolution	1mA/μs							0.5mA/μs		
Accuracy	10%±20μs										
Minimum rise time	10μs										
Measurement (read back)											
Voltage	Range/Resolution	0-6V/0.2mV						0-80V/1.5mV			
	Accuracy	0.025%+0.01%FS									
	Range/Resolution	0-16V/0.3mV						0-150V/2.7mV			
	Accuracy	0.025%+0.01%FS									
	Range/Resolution	0-80V/1.4mV						0-600V/10.7mV			
Accuracy	0.01%+0.025%FS										
Current	Range	0-0.2A	0-0.2A	0-0.4A	0-0.6A	0-0.8A	0-0.8A	0-0.1A	0-0.15A	0-0.3A	
	Resolution	0.004mA	0.004mA	0.008mA	0.012mA	0.016mA	0.016mA	0.002mA	0.003mA	0.003mA	
	Range	0-2A	0-2A	0-4A	0-6A	0-8A	0-8A	0-1A	0-1.5A	0-3A	
	Resolution	0.04mA	0.04mA	0.08mA	0.12mA	0.16mA	0.16mA	0.02mA	0.03mA	0.03mA	
	Range	0-20A	0-20A	0-40A	0-60A	0-80A	0-80A	0-10A	0-15A	0-30A	
	Resolution	0.4mA	0.4mA	0.8mA	1.2mA	1.6mA	1.6mA	0.2mA	0.3mA	0.3mA	
Accuracy	0.05%+0.05%FS										
Power	Range	0-16W	0-30W	0-30W	0-30W	0-60W	0-60W	0-60W	0-90W	0-180W	
		0-30W	0-60W	0-60W	0-60W	0-60W	0-60W	0-200W	0-300W	0-500W	
	0-100W	0-200W	0-200W	0-300W	0-400W	0-500W	0-200W	0-300W	0-500W		
Accuracy	0.1%+0.1%FS										
Protection function	Over voltage protection (OVP) Over current protection (OCP) Over power protection (OPP) Over temperature protection (OTP)										
Short circuit function											
Constant current (CC)	Set to 100% of rated current										
Constant voltage (CV)	0V										
Constant resistance (CR)	60kΩ(6V); 150kΩ(16V); 700kΩ(80V)										

Power Electric Tester

III. TH8400 Series Programmable DC Electronic Load

Features

- High resolution:1mV/0.1mA
- Up to 25kHz dynamic frequency
- Up to 500kHz sampling speed
- Low ripple and low noise
- Voltage/current ripple, peak, peak-valley measurement
- Voltage/current waveform display
- 11 kinds of operation and measurement functions
- 4.3-inch 24-color 480X272 TFT LCD screen, Chinese and English interface
- Numeric keyboard and knob operation
- Screen copy function
- Remote compensation function
- Intelligent fan control
- Protection mode: over voltage, over current, over power
- Support U disk file storage and loading, program upgrade
- Software control and detection through computer
- Equipped with HANDLER interface for automatic matching
- SCPI command protocol



RS232	USB HOST	USB DEVICE	I-MONITOR
standard	standard	standard	standard

Shelf dimension(mm):215(W)×88(H)×390(D)

Exterior dimension(mm):236(W)×111(H)×454(D)

Weight:3kg(TH8401/TH8411), 4.8kg(TH8402A/TH8402/TH8412)

Application

- Power supply
Chargers, switching power supplies, communication power supplies, LED drivers, mobile phone batteries, power banks, etc.
- New energy
Solar cells, new power cars, electric bicycles
- Electronic power components
Fuse/connector/relay/sensor
- Automation equipment integration test

Specifications

Model	TH8401		TH8402A		TH8402		TH8411		TH8412					
Rated value	Power	175W		350W		350W		175W		350W				
	Voltage	150V		150V		150V		500V		500V				
	Current	30A		30A		60A		15A		30A				
	Minimum operating voltage	1.5V@30A		1.2V@30A		1.5V@60A		1.8V@15A		3V@30A				
	Minimum rise time	20μs												
Static mode		CC mode(constant current mode) CR mode(constant resistance mode) CV mode(constant voltage mode) CP mode(constant power mode)												
Voltage	Range		0-15V		0-150V		0-15V		0-150V		0-50V		0-500V	
	Setting	Resolution	1mV		10mV		1mV		10mV		1mV		10mV	
		Accuracy	0.05%+0.05%FS											
	Resistance	Resolution	1mV		10mV		1mV		10mV		1mV		10mV	
Accuracy		0.08%+0.05%FS												
Current	Range		0-3A		0-30A		0-3A		0-30A		0-6A		0-60A	
	Setting	Resolution	0.1mA		1mA		0.1mA		1mA		0.1mA		1mA	
		Accuracy	0.05%+0.05%FS											
	Measurement	Resolution	0.1mA		1mA		0.1mA		1mA		0.1mA		1mA	
Accuracy		0.08%+0.05%FS												
Resistance	Range		0.05Ω-50kΩ		0.05Ω-50kΩ		0.05Ω-50kΩ		0.05Ω-50kΩ		0.05Ω-50kΩ			
	Resolution		0.05Ω											
	Accuracy		1%											
Power	Range		0-175W		0-350W		0-350W		0-175W		0-350W			
	Resolution		10mW		10mW		10mW		10mW		10mW			
	Accuracy		0.5%+0.1%FS											
Dynamic mode														
Dynamic mode	Range		20 μs - 60S											
	Resolution		2 μs											
	Accuracy		1μs+100ppm											
	Rise rate		0.6A/ms-1.5A/μs		0.6A/ms-1.5A/μs		1.2A/ms-3A/μs		0.3A/ms-0.75A/μs		0.6A/ms-1.5A/μs			
Measurement														
Ripple	Range		0-15V		0-150V		0-15V		0-150V		0-50V		0-500V	
	Bandwidth		250kHz											
	Accuracy		0.1%											
Protection function		Over voltage protection (OVP) Over current protection (OCP) Over power protection (OPP)												
Storage		Internal: 40 groups												
Specification														
Volume (W*H*D)		Shelf dimension(mm):215(W)×88(H)×390(D), Exterior dimension(mm):236(W)×111(H)×454(D)												
Weight		3kg		4.8kg		4.8kg		3kg		4.8kg				
Power		Supply voltage: 220V(1±10%), Supply frequency: 50Hz/60Hz(1±5%), Power consumption: <50VA												
Temperature and humidity		0°C~40°C, humidity: < 90%RH												

Standard Accessories

YT3008 Test Cable(TH8403 / TH8404 / TH8405 none)

Power Electric Tester

III. TH3300 Series Digital Power Meter

Features

- 24-bit color 4.3-inch 480 x 272 color LCD screen, English and Chinese interface
- PLL (phase-locked loop) technology, faster measurement speed
- AC and DC test
- Wide current measurement range
- Input signal waveform display: Voltage and current can be displayed simultaneously or separately
- Higher measurement accuracy and faster data update rate
- Rich display mode:
 - Traditional four-window display
 - Full parameter full screen display
- Higher frequency test range and wider frequency response
- Multiple harmonic analysis display modes: List mode, Histogram
- Data Record Function



RS232	USB HOST	USB DEVICE	HANDLER	RS485
standard	standard	standard	standard	option

Rack mount (mm):215mm(W)x88mm(H)x335mm(D)
 Dimension (mm):235mm(W)x105mm(H)x360mm(D)
 Net weight: 3.6kg

Application

- Appliances
 - TV, refrigerator, air conditioner, washing machines, vacuum cleaners, water heaters and other power efficiency testing
- Industry
 - Electric machinery, motor, transformer, charger, power and other power test
- Lighting
 - Lighting appliances, LED lamps and other power test
- New energy
 - Photovoltaic modules, electric vehicles, wind power and other power test

Specifications

Model	TH3311	TH3312	TH3321	TH3331
Display	4.3-inch color TFT display			
Connection mode	Single phase			
Basic features	AC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	DC	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Precise	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Micro current	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Wide current	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	Harmonic Analysis	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Display mode	Power test	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Data	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	Oscillogram	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Harmonic histogram	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Basic accuracy	0.15% reading + 0.2% range + 1 digit			
Voltage	Range	5V-75V/150V/300V/600V		
	Resolution	0.01V		
Current	Range	10mA/30mA/100mA/400mA/1.5A/5A/20A	1mA/3mA/10mA/40mA/150mA/500mA/2A	10mA/30mA/100mA/400mA/1A/3A/10A/40A
	Minimum resolution	1mA	1uA	1mA
Power	Range	0.01W-12kW	0.01mW-1.2kW, 6-class energy efficiency	0.01W-24kW
	Minimum resolution	0.01W	0.001mW	0.01W
Frequency	Range	Fundamental frequency range : DC/45Hz-400Hz, Bandwidth : 21kHz, filter 5kHz		
	Minimum resolution	0.01Hz		
Power factor	Range	0.001-1.000		
	Minimum resolution	0.001		
Harmonic Analysis	-----	± (5% of reading + 0.3% of range)		
Power integral	Range	0-99999kWh		
	Resolution	0.001Wh		
	Accuracy	± (0.2% of reading + 0.3% of range)		
Power timing	Range	0-9999:59:59		
	Resolution	1s		
	Accuracy	±0.05%		
Measurement speed	3 times / sec	DC: 3 times / sec, harmonic function on: 2 times / sec		
Lock function	Data lock			
Range mode	AUTO / MAN			
Input impedance	≥ 1MΩ (all voltage profiles)			
Comparator	limit sound, light alarm			
Output	Relay output			
Communication Interface	RS232C/RS485, USB DEVICE, USB HOST, HANDLER			
Storage	USB waveforms, set files			

Power Electric Tester

III. TH3400 series multi-channel digital power meter

Features

- Channel combination: optional 3/4 channels
- AC and DC test
- High stability and consistency: adopt phase-locked loop frequency multiplication synchronization control and power synchronization setting
- High resolution display: 7-inch 800×600 resolution touch screen, support mouse operation
- Display screenshot function
- Broadband input: 45Hz-420Hz, suitable for most power systems on the market
- Embedded system: equipped with embedded operating system, human-computer interaction is more flexible and friendly
- Comparison function: provide comparison output of 8 comparison channels, and the output mode is programmable
- Harmonic analysis: controllable analysis parameters, providing list display and bar graph display
- Waveform display: input signal waveform/integrated power waveform
- Vector display: vector display of input signal
- Flexible energy integration control: provide continuous time control and manual control the running and stopping of energy integration
- File storage: relatively powerful file system, compatible with most U disks
- Protocol: SCPI instruction set and MODBUS instruction analysis



RS232	USB HOST	USB DEVICE	LAN	RS485
standard	standard	standard	standard	option

Shelf volume: 215mm(W)x132mm(H)x441mm(D)
 Dimensions: 236mm(W)x154mm(H)x475.5mm(D)
 Net weight: 8.1kg

Application

- Power supply: AC power supply, DC power supply, linear power supply, switching power supply, inverter
- New energy: solar batteries, new power cars, electric bicycles
- Test and analysis of electrical parameters of electrical equipment such as household appliances, industrial electrical appliances, and various electronic loads
- Automation equipment integration test

Specifications

Model		TH3421			TH3422	
Number of channels		4			4	
Display 7 inch (800x480) color TFT resistive touch screen						
Wiring mode		One-phase two-wire (1P2W)	One-phase three-wire (1P3W)	Three-phase three-wire (3P3W)	Three-phase four-wire (3P4W)	Three-voltage three-current (3V3A)
Basic features	AC		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	DC		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Precision type		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Micro current		<input type="checkbox"/>			<input checked="" type="checkbox"/>
	Harmonic analysis		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
Display mode	Electric energy test		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Data		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Integration data		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Waveform graph		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
	Vector analysis		<input checked="" type="checkbox"/>			<input checked="" type="checkbox"/>
Basic accuracy		0.15% reading + 0.2% range + 1digit				
	Voltage	5V-75V/150V/300V/600V (Input impedance: 3MΩ)				
Current	Resolution	0.01V				
	Range	10mA/30mA/100mA/400mA (Input impedance: 200mΩ) 1.5A/5A/20A (Input impedance: 4mΩ)		1mA/3mA/10mA/40mA (Input impedance: 2Ω) 150mA/500mA/2A (Input impedance: 40mΩ)		
Power	Minimum resolution	10μA		1μA		
	Range	5mW-12kW		0.5mW-1.2kW		
Frequency	Minimum resolution	0.01mW		0.001mW		
	Range	Fundamental Frequency range: DC/45Hz-420Hz, Bandwidth: 21kHz, filter 5kHz Minimum resolution				
Power factor	Minimum resolution	0.01Hz				
	Range	-1.000-1.000				
Harmonic analysis	Minimum resolution	0.001				
		± (5% reading + 0.3% range)				
	Range	0-99999kWh				
Energy integration	Resolution	0.001Wh				
	Accuracy	±(0.2% reading + 0.3% range)				
Energy timing	Range	0-9999: 59: 59				
	Resolution	1s				
	Accuracy	±0.05%				
Measuring speed	about 7 times/s, harmonic/waveform function is ON: 4 times/s					
Lock function	Data lock					
Range method	Auto/Manual					
Input impedance	≥3MΩ(Voltage input)					
Comparator	Over-limit sound and light alarm					
Output	8 channel programmable relay output					
Communication interface	RS232C/RS485, USB DEVICE, USB HOST, LAN, HANDLER, WIFI(support RTL8192 and MT7601 drive network card)					
Storage	USB waveforms, setting files					

Power Electric Tester

III. TH343X TH344X series multi-channel digital power meter

Features

- Channel: 1/3/4
- AC/DC: Support AC and DC input test
- Soft start: using soft power switch design
- High-resolution display: 7 inches, 800×600 resolution, capacitive touch screen, support mouse operation
- Provide screenshot operation
- Broadband input: 0.1Hz-100kHz, suitable for most power systems on the market
- Embedded system: equipped with embedded operating system, the human-computer interaction is more flexible and friendly
- Comparison function: Provides 8 comparison channels for comparison output, and the output mode is programmable
- Harmonic analysis: analysis parameters are controllable, and list display and bar graph display are provided
- Waveform display: Provides basic input signal waveform display function and integrated power waveform display
- Vector display: Provide a vector display of the input signal
- Flexible energy integral control: provide continuous time control and manual control of energy integral run and stop operations
- File storage: a relatively powerful file system, compatible with most U disks (FAT format)
- Abundant interfaces: USB HOST, USB DEVICE, LAN, HANDLER, RS232/RS485 (choose one of two)
- Communication protocol: support SCPI command set and ModBus command parsing



NEW

RS232	USB HOST	USB DEVICE	LAN	RS485
standard	standard	standard	standard	option

Shelf volume: 215mm(W)x132mm(H)x441mm(D)
 Dimensions: 236mm(W)x154mm(H)x475.5mm(D)
 Net weight: 8.1kg

Application

- Motors, transformers
- Electronic production design
- Lighting
- Aerospace and military industry
- Network communication
- Audio and video equipment
- Monitoring equipment
- Source class device
- Test and analysis of electrical parameters of AC power supply, DC power supply, linear power supply, switching power supply, and inverter and other source output equipment
- Load equipment
- Test and analysis of electrical parameters of various types of household appliances, industrial appliances, various electronic loads and other electrical equipment

Specifications

Model	TH3431	TH3433	TH3434	TH3441	TH3443	TH3444	
Number Of Channels	1	3	4	1	3	4	
Display	7-Inch (800x480) Color TFT Resistive Touch Screen						
Wiring Mode	One-Phase Two-Wire (1P2W)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	One-Phase Two-Wire (1P2W) One-Phase Three-Wire (1P3W) Three-Phase Three-Wire (3P3W) Three-Phase Four-Wire (3P4W) Three-Voltage Three- Current (3V3A)	
Basic Features	AC	Y		Y			
	DC	Y		Y			
	Precision Type	Y		Y			
	Micro Current	Y		Y			
	Harmonic Analysis	Y		Y			
Electric Energy Test	Y		Y				
Display Mode	Data	Y		Y			
	Integration Data	Y		Y			
	Waveform Graph	Y		Y			
	Vector Analysis	Y		Y			
	Histogram	Y		Y			
Basic Accuracy (One Year)							
Voltage	Basic Accuracy	0.15% Reading + 0.2% Range					
	Resolution	0.001V					
Current	Basic Accuracy	± (0.15% Reading + 0.1% Range)					
	Resolution	0.1mA			1mA		
Frequency Range	Voltage/Current Accuracy						
DC	± (0.1% Reading +0.2% Range)						
0.1Hz ≤ Freq < 45Hz	± (0.1% Reading +0.2% Range)						
45Hz ≤ Freq < 66Hz	± (0.1% Reading +0.1% Range)						
66Hz ≤ Freq < 1kHz	± (0.1% Reading +0.2% Range)						

Power Electric Tester

III. TH343X TH344X series multi-channel digital power meter

Specifications

1kHz ≤ Freq < 10kHz		± ((0.07*Freq) % Reading +0.3% Range)	
10kHz ≤ Freq ≤ 100kHz		± (0.5% Reading +0.5% Range) ± [0.04*(Freq - 10k)] % Reading	
Input			
Voltage	Scope	1V - 600V	
	Range	15V/30V/60V/150V/300V/600V	
	Minimum Resolution	0.001V	
	Input Impedance	2MΩ	
	Allowed Max Input	1000V (1S) 700V(Continuous)	
Current	Scope	0.01mA - 2A	0.1mA - 20A
	Range	0.5mA/1mA/2mA/5mA/10mA/20mA	5mA/10mA/20mA/50mA/100mA/200mA
	Input Impedance	4Ω	400mΩ
	Range	0.05A/0.1A/0.2A/0.5A/1A/2A	0.5A/1A/2A/5A/10A/20A
	Input Impedance	40mΩ	4mΩ
	Minimum Resolution	0.1uA	1uA
Power	Allowed Max Input	3A(1S) 2A(Continuous)	30A(1S) 20A(Continuous)
	Range	0.01mW - 1.2kW	0.1mW - 12kW
Frequency	Minimum Resolution	0.01Hz	
	Range	Fundamental Frequency Range: DC/0.1Hz - 100kHz, Filter 500Hz	
Power Factor	Minimum Resolution	0.001	
	Range	- 1.000 - 1.000	
Harmonic Analysis	Range	10Hz-1.2kHz	
	Accuracy	± (5% Reading +0.3% Range)	
Energy Integration	Range	0 - 99999kWh	
	Resolution	0.001Wh	
Energy Timing	Accuracy	± (0.2% Reading +0.3% Range)	
	Range	0 - 9999: 59: 59	
	Resolution	1s	
Update Rate		Optional 0.1s/0.25s/0.5s/1s/2s/10s/20s	
Lock Function		Data Lock	
Range Method		Auto/Manual	
Input Impedance		≥ 2MΩ (Voltage Input)	
Comparator		Over-Limit Sound And Light Alarm	
Output		8 Channel Programmable Relay Output	
Measurement Assistance Function			
Data Buffer Storage Function		The Test Results Are Stored In A U Disk, And Statistical Analysis Can Be Performed On The PC Side	
Save/Load Function		The Saving Of Setting Data Is Divided Into Measurement Parameter Setting And System Parameter Setting	
Keyboard Lock Function		Front Panel Keys And Touch Screen Operations Can Be Locked To Effectively Prevent Misoperation	
Communication Interface	Serial Communication	RS232C/RS485 Optional	
	USB HOST	Universal Serial Bus Socket, Type A; FAT16/FAT32 Format. U Disk Storage Or Designated Wireless Network Card (WIFI Supports RTL8192 And MT7601) And Other Equipment Support	
	USB DEVICE	Universal Serial Bus Socket, Small Type B (4 Contact Positions); Compatible With USBTMC - USB488 And USB2.0, Female Connector For Connecting External Controllers. Optional CDC Mode Or TMC Mode.	
	LAN	10/100baset Ethernet, 8 Pins, Stable Communication.	
	HANDLER	8 Channel Programmable Relay Output	
Storage		USB Waveform, Setting File	
Power Supply		AC220V± 10%, 50/60Hz± 5%, Soft Power Switch	
Size W*H*D	Working Size	236mm*154mm*475.5mm	
	Shelf Size	215mm*132mm*441mm	
Weight		8.1kg	

Safety Tester/Hipot Tester

IV. TH9110/A Hipot Tester

Features

- High power: AC 5kV / 100mA / 500VA output
- High security:
 - High-voltage floating output design, in line with the safety requirements of EU standards EN50191 (only TH9110)
 - Electric shock protection function
- High resolution: 7 inch 800 × 480 dots, TFT-LCD display
- Brand-new operation interface, Chinese and English menu
- ARC detection function
- Contact check function (OSC)
- Breakdown voltage test function
- One-key screen capture function
- One-key recording function
- Rear panel output function to facilitate automated production line testing
- Storage: 100 files, up to 50 steps per file

Application

- Winding devices
 - Transformers, generators/motors and other products needing high-power withstand voltage test and analysis, such as different types of motor stator, rotor and other high parasitic capacitance products
- Electronic components
 - Capacitors, coils, cores, choke coils, filters and so on
- Electrical products
 - Household appliances, information products, audio-visual equipment, electric heating appliances, lighting equipment



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

TH9110/A

Dimension(mm): 430(W)×132(H)×500(D)
Weight: 21kg

- Non-electrical products
 - Withstand voltage and insulation resistance test for wire, non-woven fabric, insulation materials and so on
- New energy automobile
- Automated test system
- Medical equipment

Specifications

Model	TH9110	TH9110A
Withstand voltage test		
Output voltage	AC	0.05 - 5kV Load Variance: 1% Accuracy: 1% Resolution: 2V
	DC	0.05 - 6kV Load Variance: 1% Accuracy: 1% Resolution: 2V
Current test range	AC	0.001mA - 120mA(Voltage≤4kV); 0.001mA - 100mA(Voltage>4kV) Accuracy: 1% Resolution: 1μA
	DC	0.0001mA - 25mA Accuracy: 1% Resolution: 0.1 μA
Output power	500VA	
Insulation resistance test		
Output Voltage	DC : 0.05 - 5kV Resolution: 2V Accuracy: 1% of set value + 0.1% full scale	
Resistance test range	1MΩ-50.0GΩ Resolution: 0.1MΩ	
Discharge function	Automatic discharge after the end of the test	
ARC detection	AC	1mA - 20mA
	DC	1mA - 10mA
Contact check function	OSC open and short: 600Hz, 0.1s	
Security features		
High voltage floating output	Leakage current <3 mA	-----
Electric shock protection	0.5mA ±0.25mA	
Other protection	Start protection, panel operation password protection	
Alarm indication	PASS: short tone, green light; FAIL: long tone, red light	
Memory	100 groups, 50 steps per group	
General parameters		
Voltage rise time	0.1s — 999.9s	
Test time setting(AC/DC)	0.3s — 999s	
Voltage fall time	0.1s — 999.9s	
Waiting time (IR)	0.2s — 999.9s	
Time accuracy	±(1%+0.1s)	

Standard Accessories

- TH90018 Withstand Voltage Test Cable(only TH9110)
TH90015 Withstand Voltage Test Cable(only TH9110A)

Safety Tester/Hipot Tester

IV. TH9120A/D Hipot Tester

Features

- High voltage: AC 10kV, DC 12kV
- Breakdown voltage test: AC can reach 10kV, DC can reach 12kV; Component voltage stepping (10V) and Normal stepping (divided according to test steps)
- High resolution: 7 inch 800 × 480 dots, TFT-LCD display
- Chinese and English menu operation interface
- ARC detection function
- OSC check function
- One-click screen capture function
- Rear panel output function for automatic test of production line
- Storage: 100 files, up to 50 steps per file
- Pin detection
- Insulation resistance can reach 50G

Application

- High withstand voltage test
- High-voltage optocouplers, high-voltage relays, high-voltage switches and other high-insulation devices
- Electronic components
- Capacitors, coils, cores, chokes, filters, etc.
- Electrical products
- Household appliances, information products, audio-visual equipment, electric heating appliances, lighting equipment

Specifications

Model	TH9120A	TH9120D		
Test mode	AC/OSC	DC/IR		
Withstand voltage test				
Output voltage	AC	Voltage range	0.05-10.0kV	-----
		Voltage waveform	50/60Hz ±0.1% Sine wave	-----
	DC	Output power	200VA(10.0kV 20mA)	-----
		Voltage range	-----	0.05-12.0kV
		Output power	-----	120VA(12.0kV 10mA)
Load change rate	±(1% set value + 10V) (rated power)			
Voltage resolution	2V			
Voltage accuracy	±(1% set value + 0.1% full scale)			
Current test range	AC	Current range	0.001mA-20mA	-----
		Current resolution	0.001mA	-----
		Current accuracy	0.100mA-2.999mA ±(1% reading + 0.5% full scale) 3.00mA-20.00 mA ±(1.5% reading + 0.5% full scale)	-----
	DC	Current range	-----	0.0001mA-10mA
		Current resolution	-----	0.1uA
		Current accuracy	-----	±(1% reading + 0.5% full scale)
Maximum short circuit current	40mA (AC test only)		-----	
Fast discharge function	-----	Automatic discharge after test (DCW)		
Insulation resistance test				
Output voltage	-----	DC:0.05-5.0kV		
Voltage resolution	-----	2V		
Voltage accuracy	-----	±(1% set value + 0.5% full scale)		
Resistance test range	-----	0.1MΩ– 50.0GΩ		

NEW



RS232	USB HOST	USB DEVICE	HANDLER	LAN	GPIB
standard	standard	standard	standard	standard	option

Dimension(mm):430mm(W)x132mm(H)x500mm(D)
Weight: 21kg

- Non-electrical products
- Withstand voltage and insulation resistance test of wire, non-woven fabric, insulating material, etc.
- New energy vehicles
 - Automatic test system

Safety Tester/Hipot Tester

IV. TH9120A/D Hipot Tester

Resistance test accuracy	Voltage \geq 0.5kV	-----	1M Ω –1G Ω \pm (3% reading + 0.1% full scale)
			1G Ω –10G Ω \pm (7% reading + 2% full scale)
			10G Ω –50G Ω \pm (10% reading + 1% full scale)
	Voltage $<$ 500V	-----	0.1M Ω –1G Ω \pm (5% reading + 2% full scale)
Arc detection			
Program setting	AC	1.0mA-20.0mA	-----
	DC	-----	1.0mA-10.0mA
OSC open and short detection			
Sampling standard capacitance range	0.001—40nF	-----	
Open circuit judgment range	10%—100%	-----	
Short circuit judgment range	100%—500%	-----	
Time setting			
Test time	0.3—999s, 0 means continuous test		
Rise time	0.1—999s, 0 means OFF		
Fall time	0.1—999s, 0 means OFF		
Waiting time	0.1—999s, 0 means OFF (DC withstand voltage only)		
Safety protection function			
Shock protection	0.5mA \pm 0.25mA Optional: ON or OFF		
Start protection (Interlock)	When the pin is connected with low terminal, high voltage output is allowed.		
Panel operation protection	Key lock, password		
Alarm indication	PASS: short sound, green light; FAIL: long sound, red light		
Storage and interface			
Internal memory	100 files can be stored and 50 steps can be edited in each file		
Standard interface	RS232, USB DEVICE, USB HOST, LAN, HANDLER		
Optional interface	GPIB		
Ambient temperature and humidity			
Parameter comparison temperature	18 $^{\circ}$ C~28 $^{\circ}$ C, Humidity: 30%~70%RH		
Normal working temperature	0 $^{\circ}$ C~45 $^{\circ}$ C, Humidity: 20%~90%RH		
Storage environment temperature	-10 $^{\circ}$ C~55 $^{\circ}$ C, Humidity: $<$ 80%RH		
General specification			
Power supply	100V~240VAC, 47Hz~63Hz		
Power	No load: $<$ 100W Rated power:300W		
Volume	430mm (W) x 132mm (H) x 500mm (D)		
Weight	21kg		

Standard Accessories

TH90003R/B	Withstand Voltage Test Cable
TH90015	Withstand Voltage Test Cable

Safety Tester/Hipot Tester

IV. TH9320-S4/TH9320-S8 Hipot Tester

Features

- Output voltage: AC:5kV/20mA; DC:6kV/10mA
- Test voltage of insulation resistance:0.10kV-1.00kV
Test range of insulation resistance: 1MΩ-1000MΩ
- 480×272 dot-matrix, TFT-LCD display
- Provide 4 channels (-S4), 8 channels (-S8) scan interface
- Rapidly discharging and arc detection
- Randomly set voltage rising time and testing time in 999.9 seconds; Freely set waiting time for insulation resistance
- Hold 20 testing steps; 4 testing modes selectable
- Brand new operation interface and concise interface operation design
- Lock keyboard

Brief Introduction

■ TH9320-S series AC/DC withstanding voltage/insulation resistance tester is an economical and intelligent safety tester with the characteristics of small size, light weight, pleasing appearance and easy operation. TH9320-S series can be widely used in the safety tests of household appliances, transformer, electrical equipments and components.



TH9320-S8



TH9320-S4

RS232	USB HOST	USB DEVICE	HANDLER	PLC
standard	standard	standard	standard	standard

Dimension(mm):280mm(W)x138mm(H)x428mm(D)
Weight: 18kg

Specifications

Model		TH9320-S4	TH9320-S8
Withstanding voltage test			
Output voltage	AC	0.05—5.00kV ± (2% reading+5digits) , (50Hz, 60Hz optional)	
	DC	0.05—6.00kV ± (2% reading+5digits)	
	Voltage adjustment rate	≤ (1% - 5V) (rated power)	
Current test range	AC	0.000mA – 20.00mA ±(2% reading+2digits)	
	DC	0uA –10.00mA ±(2% reading+2digits)	
	Discharge function	Discharge after test ends (DCW)	
Insulation resistance test			
Output voltage		0.10kV – 1.00kV ±(2%reading+2V)	
Resistance test range		1MΩ– 9999MΩ	
Resistance test accuracy	500V-1000V	1MΩ– 1000MΩ ±(5%reading+2digits) ;1000MΩ–9999MΩ ±(10%reading+2digits)	
	100V-500V	1MΩ– 1000MΩ ±(10%reading+2digits)	
Discharge function		Discharge after test ends	
Arc detection			
Measurement range	AC	1 – 9 levels (factory default 5) (20mA, 18mA, 16mA, 14mA, 12mA, 10mA, 7.7mA, 5.5mA, 2.8mA respectively)	
	DC	1 – 9 levels	
General specification			
Memory		5 groups	
Voltage rising time		0.1s – 999.9s	
Test time setting (AC/DC)		0.2s – 999.9s	
Waiting time (IR)		0.2s – 999.9s	
Time Accuracy		±(1%+0.1s)	
Scan interface		4 channels	8 channels

Standard Accessories

- TH90003R Withstand Voltage Test Cable X 9 (only TH9320-S8)
 TH90003R Withstand Voltage Test Cable X 5 (only TH9320-S4)
 TH90003C Withstand Voltage Test Cable

Safety Tester/Hipot Tester

IV. TH9310/TH9320 Series Hipot Tester

Features

- TH9310 series: AC:5kV/10mA; DC:6kV/5mA AC/ DC withstanding voltage/insulation resistance tester
TH9320 series: AC:5kV/20mA; DC:6kV/10mA AC/ DC withstanding voltage/insulation resistance tester
- TH9310/20: AC/ DC withstanding voltage/insulation resistance tester
TH9310B: AC withstanding voltage tester
- 480×272 dot-matrix, TFT-LCD display
- Rapidly discharging and arc detection
- Randomly set voltage rising time and testing time in 999.9 seconds;
Freely set waiting time for insulation resistance
- Hold 5 testing steps; 4 testing modes selectable
- Brand new operation interface and concise interface operation design
- Lock keyboard
- PLC interface

Specifications

Model	TH9310/20		TH9310B
Withstanding voltage test			
Output voltage	AC	0.05—5.00kV ± (2% reading+5digits) , (50Hz, 60Hz optional)	
	DC	0.05—6.00kV ± (2% reading+5digits)	
	Voltage adjustment rate	≤ (1% - 5V) (rated power)	
Current test range	AC	TH9310: 0.000mA – 10.00mA ±(2% reading+2digits) TH9320: 0.000mA – 20.00mA ±(2% reading+2digits)	
	DC	TH9310: 0uA – 5.00mA ±(2% reading+2digits) TH9320: 0uA –10.00mA ±(2% reading+2digits)	
	Discharge function	Discharge after test ends (DCW)	
Insulation resistance test			
Output voltage	0.10kV – 1.00kV ±(2%reading+2V)		-----
Resistance test range	1MΩ– 9999MΩ		-----
Resistance test accuracy	500V-1000V	1MΩ– 1000MΩ ±(5%reading+2digits) 1000MΩ–9999MΩ ±(10%reading+2digits)	
	100V-500V	1MΩ– 1000MΩ ±(10%reading+2digits)	
Discharge function	Discharge after test ends		-----
Arc detection			
Measurement range	AC	1 – 9 levels (factory default 5) (20mA, 18mA, 16mA, 14mA, 12mA, 10mA, 7.7mA, 5.5mA, 2.8mA respectively)	
	DC	1 – 9 levels	
General specification			
Memory	5 groups		
Voltage rising time	0.1s – 999.9s		
Test time setting (AC/DC)	0.2s – 999.9s		
Waiting time (IR)	0.2s – 999.9s		-----
Time Accuracy	±(1%+0.1s)		
Dimension (W×H×D)	280mm×89mm×428mm/10kg		
Interface			
Standard	HANDLER, RS232, USBDRV(PC interface), USBHOST(USB port)		

Standard Accessories

- TH90003R Withstand Voltage Test Cable
TH90003C Withstand Voltage Test Cable



RS232	USB HOST	USB DEVICE	HANDLER	SIGNAL	PLC
standard	standard	standard	standard	standard	standard

TH9310/TH9320 Series

Dimension(mm):280mm(W)×88mm(H)×428mm(D)

Weight: 11kg (only TH9310 series), 12.311kg (only TH9320 series)

Brief Introduction

- TH9310/20 series withstanding voltage/insulation resistance tester is an economical and intelligent safety tester with the characteristics of small size, light weight, pleasing appearance and easy operation. TH9310/20 series can be widely used in the safety tests of household appliances, transformer, electrical equipments and components.

Safety Tester/Hipot Tester

IV. TH9010/A Parallel 8-channel/4-channel Hipot Tester

Features

- 7-inch 800×480 dot-matrix, TFT-LCD display
- Chinese and English operation interface and concise interfacet operation design
- 8-channel withstand voltage parallel output and test efficiency increased eight times
- Parallel 8-channels and each channel is non-interfering
- Each channel can be extended by a four-channel scanner
- Support 4 four-channel scanner at most and one instrument can be extended to 128 channels
- Four-channel scanner supports contact check function
- Single output power: AC:5kV/10mA; DC:6kV/5mA
- Insulation resistance test voltage: 0.10kV -1.00kV
- Enhanced security: electric shock protection
- Rapid discharge and arc detection function
- Arbitrarily set voltage rising time and test time in 999.9 seconds; freely set waiting time for insulation resistance
- Key-Lock Function
- Display the PASS/FAIL result of each channel independently and the total result simultaneously
- Store 100 test files and each file can hold at most 20 testing steps

Application

- Automated test system
- Household appliances
- Transformers, motors
- Electrical equipment
- Lighting industry
- New energy vehicles
- Electronic components
- Medical equipment

Specifications

Model	TH9010		TH9010A
Number of units	8 separate channel		4 separate channel
Withstanding voltage test			
Output voltage	AC	0.10kV — 5.00kV	±2%
	DC	0.10kV — 6.00kV	±2%
Current test	AC	0mA — 10.00mA	±(2% readings + 5 digits)
	DC	0uA — 5.00mA	±(2% readings + 5 digits)
Range	Rapid discharge function	Discharge after test ends (DCW)	
Insulation resistance test			
Output voltage	0.10kV — 1.00kV ±2%		
Resistance test range	0.1MΩ — 10.0GΩ		
Resistance test accuracy	0.10MΩ — 999MΩ ±10%		
	1.00GΩ — 10.0GΩ ±20%		
Discharge function	Discharge after test ends		
Arc detection			
Test range	Corresponding current	1mA — 20mA	
General specification			
Voltage rising time	0.1s — 999.9s		
Test time setting (AC/DC)	0.2s — 999.9s		
Voltage fall time	0.1s — 999.9s		
Waiting time (IR)	0.2s — 999.9s		
Time accuracy	±(1%+0.1s)		
Memory	Store 100 test files and each file can hold at most 20 testing steps		
Interface			
Standard	HANDLER, RS232, USB DRV, USB HOST		

NEW



RS232	USB HOST	USB DEVICE	HANDLER	GPIB
standard	standard	standard	standard	option

TH9010

Dimension(mm): 430(W)×177(H)×630(D)
Weight: 40kg



TH90101 8-unit four-channel scan expander
TH90101A 4-unit four-channel scan expander

Safety Tester/Hipot Tester

IV. TH2883S8-5/TH2883S4-5 Impulse Winding Tester



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

TH2883S8-5/TH2883S4-5

Dimension(mm):400mm(W)x132mm(H)x420mm(D)

Weight: 15kg

Features

- Impulse voltage of 100V~5000V
- Two models of 4-channel and 8-channel for selection
- Each channel can be programmed and controlled as high-terminal, low-terminal and OFF
- 20 test procedures can be added at most
- 65k color 7" TFT wide display screen
- Up to 200Msps waveform sampling rate
- Maximum measuring speed: 6meas/sec
- Storage depth of 6k Bytes
- High bandwidth analog acquisition circuit
- High-fidelity corona extraction algorithm (patent technology)
- Four waveform comparison methods
- Automatic storage of instrument parameters
- Measurements on voltage, time and frequency
- Amplification, stretch and movement of the waveform for accurate display
- Multi-sample average, average processing of 32 standard waveforms
- Destructive testing for your correct choose of voltage
- Use demagnetized impulse to ensure the conformity of tested waveforms
- Login of different user right for easy management
- 20 groups of instrument files can be stored and automatically loaded
- Screen information can be stored in USB disk (COPY key)
- System firmware can be automatically upgraded through USB-disk
- Selectable Chinese and English operation interfaces
- Four selectable display interface effects
- Foot control interface for easy measurements
- Handler interface to realize on-line operation
- RS232C, USB Device and LAN interface to realize remote control


Brief Introduction

■ TH2883 series products are newly developed impulse winding testers by Tonghui. This product line makes Tonghui as the first provider of impulse winding tester from low voltage of 30V to high voltage of 10kV, single channel to multichannel (Max.:8 channels) in this industry. The instrument adopts popular 32 bit CPU and high density SMD technology, 65k color 7-inch TFT wide display screen, bringing ease for your eyes and convenience to your operation. The impulse voltage of 100V~5000V, maximum 8 channel sweep test, maximum 20 test procedures, sampling rate of 200Msps, memory depth of 6k bytes makes your test accurately. The usage of standard sample average, application of demagnetized impulse, high bandwidth analog acquisition circuit, technology of high-fidelity corona extraction as well as the opening of non-destructive test reflect the design philosophy "customer-oriented, share the future technology with you" of Tonghui.

According to the output number of channels, TH2883 series is consist of 2 models:TH2883S8-5 and TH2883S4-5. TH2883S8-5 is the ideal product for measurements of multiphase coils. The 8 channel of TH2883S8-5 can be programmed and configured as voltage high-terminal, voltage low-terminal and OFF. Any combination of the configuration condition of the 8 channels and maximum 20 test procedures can be achieved. Also, it can test the coils successively in 8 channels. TH2883S4-5 is provided with 4 channels. It is especially developed on the basis of the 8 channels of TH2883S8-5 for customers who need less sweep channels. USB Host, RS232C, USB Device and LAN interface are provided in TH2883 series products for your quick save of the waveforms and remote control of the instrument.

Corona extraction function

With high-fidelity corona extraction algorithm (patent technology) and high bandwidth analog acquisition circuit,TH2883 series products can fully recover the corona waveform of high-frequency and makes you know more about the insulating property of products.

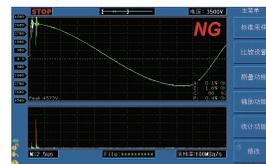

TH2883S8-5 is provided with 8 channels from CH1-CH8,TH2883S4-5 is provided with 4 channels from CH1-CH4. These channels are installed on the rear panel for convenient use, as shown in the figure:



Safety Tester/Hipot Tester

IV. TH2883S8-5/TH2883S4-5 Impulse Winding Tester

Specifications

Model	TH2883S8-5	TH2883S4-5
Impulse voltage	100V-5000V 10V steps	
Voltage accuracy	±(5% set value +15V)	
Readback accuracy	±(5% actual value +15V)	
Channels	8	4
Inductance test range	≥10uH	
Impulse energy	Max.: 0.25 Joule	
Test speed	6 times/second (single channel, single step)	
Pulses applied	Max.: 32	
Input Impedance	5MΩ	
Display	800x480 dots, 65k color TFT; Waveform Display Range: 600x256	
Waveform Acquisition	Sampling rate: Max. 200Msps, 8 levels adjustable Resolution: 8 Bits Memory Depth: 6k Bytes Average: 1 to 32	
Comparison Methods	Comparison with Standard Waveform: ● Area Size Comparison ● Differential Area Comparison ● Corona Discharge Comparison ● Differential Phase Comparison	
Waveform Measurement	Voltage/Frequency/Time	
Trigger Mode	Manual/External/Bus/Internal	
Detection Output	Pass/Fail display/LED/ Alarm	
Measurement Statistics	Statistics for measurement results	
Memory	20 groups of standard waveform data and instrument setup can be stored in internal non-volatile memory. USB flash memory can be used as external memory.	
Interface	Handler, RS232C, USB Device, USB Host, LAN	
Power supply		
Power supply	220V ±10% 50Hz/60Hz ±5%	
Power consumption	≤200VA	
General conditions		
Working environment	Temperature	0°C - 40°C
	Humidity	≤75% R.H.
Safety and electromagnetic compatibility	IEC61010-1:2001, IEC61326-2-1:2005	

Standard Accessories

Three core power cord

TH2881-001 Foot Switch

TH2883-01 High voltage test cable

TH90003R High voltage test cable x 8 (only for TH2883S8-5)

TH90003R High voltage test cable x 4 (only for TH2883S4-5)

Safety Tester/Hipot Tester

IV. TH2883 Series Impulse Winding Tester



RS232	USB HOST	USB DEVICE	HANDLER	LAN
standard	standard	standard	standard	standard

TH2883 Series

Dimension(mm):400mm(W)x132mm(H)x420mm(D)

Weight: 15kg

Features

- Impulse voltage of 30V~10kV
- Minimum inductance value of winding that can be tested: 1uH
- 65k color 7" TFT wide display screen
- Up to 200Mpsps waveform sampling rate
- Maximum measuring speed: 6meas/sec
- Storage depth of 6k Bytes
- High bandwidth analog acquisition circuit
- High-fidelity corona extraction algorithm (patent technology)
- Four waveform comparison methods
- Automatic storage of instrument parameters
- Measurements on voltage, time and frequency
- Amplification, stretch and movement of the waveform for accurate display
- Multi-sample average, average processing of 32 standard waveforms
- Destructive testing for your correct choose of voltage
- Use demagnetized impulse to ensure the conformity of tested waveforms
- Login of different user right for easy management
- 20 groups of instrument files can be stored and automatically loaded
- Screen information can be stored in USB disk (COPY key)
- System firmware can be automatically upgraded through USB-disk
- Selectable Chinese and English operation interfaces
- Four selectable display interface effects
- Foot control interface for easy measurements
- Handler interface to realize on-line operation
- RS232C, USB Device and LAN interface to realize remote control


Brief Introduction

■ TH2883 series products are newly developed impulse winding testers by Tonghui. This product line makes Tonghui as the first provider of impulse winding tester from low voltage of 30V to high voltage of 10kV, single channel to multichannel (Max.:8 channels) in this industry. The instrument adopts popular 32 bit CPU and high density SMD technology, 65k color 7-inch TFT wide display screen, bringing ease for your eyes and convenience to your operation. The minimum impulse voltage of 30V, maximum impulse voltage output of 10kV, winding test of 1uH inductance value, sampling rate of 200Mpsps, memory depth of 6k bytes makes your test accurately. The usage of standard sample average, application of demagnetized impulse, high bandwidth analog acquisition circuit, technology of high-fidelity corona extraction as well as the opening of non-destructive test reflect the design philosophy "customer-oriented, share the future technology with you" of Tonghui.


According to the output voltage, TH2883 series is consist of 3 models:TH2883-1, TH2883-5 and TH2883-10. With minimum impulse voltage of 30V and maximum impulse voltage of 1200V, TH2883-1 low inductance impulse winding tester can test windings of 1uH low inductance value. The instrument is the ideal test product for inductance coils used by switching power supply. With impulse voltage of 100V~5000V, TH2883-5 is a standard product for testing all kinds of coils. With maximum impulse output voltage of 10kV, TH2883-10 is appropriate for interturn test of higher insulation and voltage resistance. Standard-equipped USB Host, RS232C, USB Device and LAN interface of TH2883 series product are convenient for your fast storage of graphs and remote control.

Corona extraction function

With high-fidelity corona extraction algorithm (patent technology) and high bandwidth analog acquisition circuit,TH2883 series products can fully recover the corona waveform of high-frequency and makes you know more about the insulating property of products.

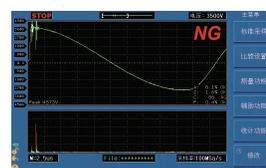

The maximum output test voltage of TH2883-1 is related to the load inductance value, as shown in the follow:

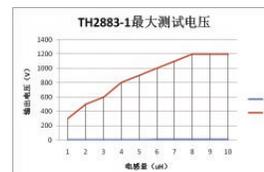

Safety Tester/Hipot Tester

IV. TH2883 Series Impulse Winding Tester

Specifications

Model	TH2883-1	TH2883-5	TH2883-10
Impulse voltage	30V-1200V 5V steps	100V-5000V 10V steps	500V-10kV 20V steps
Voltage accuracy	±(5% set value +5V)	±(5% set value +15V)	±(5% set value +25V)
Readback accuracy	±(5% actual value +5V)	±(5% actual value +15V)	±(5% actual value +25V)
Channels	1		
Inductance test range	≥1uH	≥10uH	≥20uH
Impulse energy	Max.: 0.02 Joule	Max.: 0.25 Joule	Max.: 0.5 Joule
Test speed	6 times/second	6 times/second	3 times/second (when 10kV impulse voltage is output)
Pulses applied	Max.: 32		
Input Impedance	5MΩ		
Display	800x480 dots, 65k color TFT; Waveform Display Range: 600x256		
Waveform Acquisition	Sampling rate: Max. 200Msps, 8 levels adjustable Resolution: 8 Bits Memory Depth: 6k Bytes Average: 1 to 32		
Comparison Methods	Comparison with Standard Waveform: ● Area Size Comparison ● Differential Area Comparison ● Corona Discharge Comparison ● Differential Phase Comparison		
Waveform Measurement	Voltage/Frequency/Time		
Trigger Mode	Manual/External/Bus/Internal		
Detection Output	OK/NG display/LED/ Alarm		
Measurement Statistics	Statistics for measurement results		
Memory	20 groups of standard waveform data and instrument setup can be stored in internal non-volatile memory. USB flash memory can be used as external memory.		
Interface	Handler, RS232C, USB Device, USB Host, LAN		
Power supply			
Power supply	220V ±10% 50Hz/60Hz ±5%		
Power consumption	≤200VA		
General conditions			
Working environment	Temperature	0°C - 40°C	
	Humidity	≤75% R.H.	
Safety and electromagnetic compatibility	IEC61010-1:2001, IEC61326-2-1:2005		

Standard Accessories

Three core power cord

TH2881-001 Foot Switch


TH2883-01 High Voltage Test Cable

Safety Tester/Hipot Tester

IV. TH2882A Series Impulse Winding Tester

Features

- Low inductance impulse test: down to 10 μ H
- Low energy test without damaging the coil
- Fast detection of winding insulation at a speed of 5.5 meas/sec
- 4 kinds of waveform comparison methods
- Up to 40 MSPS sampling rate
- 320 \times 240 dot-matrix graphic LCD display
- Chinese and English operation languages
- Friendly user's interface and easy operation
- Multi-trigger mode programmable
- Voltage, Time and Frequency measuring function
- Direct display of comparison result
- Keyboard lock and password protection function
- Handler, RS-232C, and GPIB(optional) interfaces
- 500 groups of waveforms can be stored in USB disk (optional)
- Multi-channel scan control interface: SCANNER (optional)

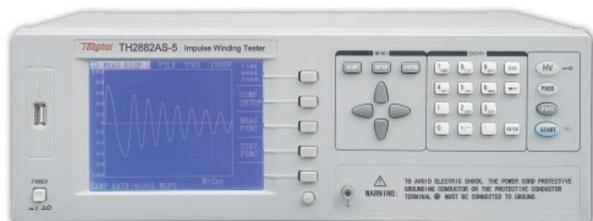

RS232	USB HOST	HANDLER	GPIB
standard	standard	standard	option

TH2882 Series



Dimension(mm):400mm(W)x132mm(H)x420mm(D)

Weight: 7.6kg(TH2882A) ,8.4kg(TH2882AS)

Brief Introduction

■ Due to the influence of coil wire material, magnetic material, framework and manufacture technics etc., coil products (such as transformers, motors, etc.) may have defects of low insulation between coil layers, circles and leads. TH2882A series impulse winding tester, adopting high-speed sampling technique, is a new generation analysis test instrument for insulation performance of coil products.

When testing, TH2882A compares the standard waveform stored in the instrument with current measuring waveform. TH2882A gives the PASS or FAIL comparison result according to Area, Differential Area, Corona Discharge, Differential Phase etc. With strong function, precision test method, flexible operation and various interfaces, TH2882A can provide test solution for most coil winding products.

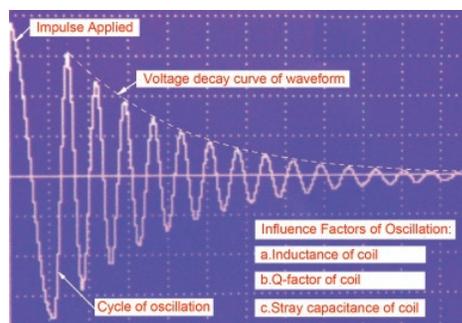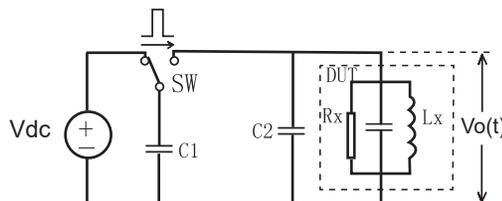

The Decay curve of winding voltage

Theory of Impulse Test of Coil-winding

■ The impulse winding tester tests the electrical characteristics of coil winding without damaging the DUT. The prerequisite conditions for quality of a coil can be detected at just a glance. The detection is carried out when the same electric impulse by capacitor discharge is applied to the standard and the DUT. The voltage decay waveform is generated in response to the impulse, related to the Q-factor and inductance of the coil. In this sense, the tester can detect turn & layer short, the differences in the number of turns and the material of the core. If high impulse voltage is applied, the poor insulation will appear as a corona or layer discharge.

Safety Tester/Hipot Tester

IV. TH2882A Series Impulse Winding Tester

Specifications

Output Impulse Voltage	TH2882A-3	300V-3000V, 50V Steps, $\pm 5\%$ of set value $\pm 15V$
	TH2882A-5/TH2882AS-5	500V-5000V, 100V Steps, $\pm 5\%$ of set value $\pm 25V$
Voltage Control Mode	Normal	Voltage programmable at the measurement terminals when terminals opened
	Constant	Maintaining selected voltage across the winding independent of changes of the winding impedance
Impulse Energy (1K Ω Resistive Load)	TH2882A-3	\leq Max. 90 milli-Joules
	TH2882A-5/TH2882AS-5	\leq Max. 250 milli-Joules
Inductance Range	TH2882A-3	≥ 10 More than 10 μ H
	TH2882A-5	≥ 20 More than 20 μ H
	TH2882AS-5	≥ 200 More than 200 μ H
Display	Screen Mode	320x240 dots LCD
	Waveform Display Dots	240x200 dots
	Display Information	Setting parameter , Standard & measuring waveform, Measurement & comparison result
Waveform Sampling	Sampling rate	40MSPS/25ns, 20MSPS/50ns, 10MSPS/100ns, 5MSPS/200ns,2.5MSPS/400ns, 1.25MSPS/800ns, 625kSPS/1.6 μ s, 312kSPS/3.2 μ s,
	Resolution	8 digits
	Sampling length	960 Bytes
Input impedance		10M Ω (Resistive voltage divider)
Measuring speed		5.5 times/sec (Waveform display OFF, PASS/FAIL ON)
		3.3 times/sec (Waveform display ON, PASS/FAIL ON)
Average Rate		1 to 99 ,Programmable
Waveform Measurement		Voltage, Time, Frequency
Trigger Mode		Internal/Manual (Foot)/External/ BUS
Comparison Mode		Area size comparison Differential area comparison Corona discharge Differential phase comparison
Area Size Repetition accuracy		$\pm 1\%$
Differential Area Repetition Accuracy		$\pm 1\%$
Detection Output		PASS/FAIL display , Alarm
Alarm Volume		Long high, Long low, Single low, Double low, Off
Memory		60 groups of standard waveform data can be stored in internal non-volatile memory 500 groups in USB flash memory (optional)

General Specifications

Operating Temperature and Humidity		0°C-40°C, $\leq 90\%$ RH
Power Requirements	Voltage	99V - 121V AC, 198V - 242V AC
	Frequency	47.5Hz-63Hz
Power Consumption		$\leq 40VA$

Standard Accessories

TH2881-001	Foot Switch
TH2883-01	High-Voltage Test Cable(only TH2882A-3/-5)
TH2882AS-01	Test Cable(only TH2882AS-5)

Options

TH10001	GPIB Interface Board
TH26026	USB Disk
TH12021	TH2882 RS232C Control Software

Safety Tester/Hipot Tester

IV. TH9410A/TH9411A Ground Bond Tester

NEW

Features

- Test current: 1.00-45.00A
- Grounding resistance range: 0-600mΩ
- Four-terminal test mode to ensure test accuracy
- The internal power amplifier circuit drives the current output, which is not affected by the power supply and load
- The output holes on the front and rear panels are designed to facilitate the integration of standard chassis
- 480×272 dots, TFT-LCD display
- 999.9 seconds test time, which is greater than common 60S test requirements
- Keyboard lock function to prevent misoperation
- Safety lock function to prevent the instrument from accidentally opening the test state
- Store 20 test files, each with 20 test steps



RS232	USB HOST	USB DEVICE	HANDLER
standard	standard	standard	standard

Dimension (mm): 280(W) x 88(H) x 428(D)

Net weight: 14 kg

Application

- Automated test system
- Household appliances
- Transformer, motor
- Electrical equipment
- Electric heating appliances
- Lighting industry
- New energy vehicles
- Electronic components
- Medical equipment

Specifications

Model			TH9410A			TH9411A	
Output	Current	Scop	1A-45A			1A-32A	
		Range	1.00A-5.00A	5.01A-30A	30.01A- 45A	1.00A-5.00A	5.01A-32A
		Accuracy	±(2% Reading + 3 Digit)				
		Setting Resolution	0.01A				
		Readback Resolution	0.01A				
	Output Voltage	8Vmax		6Vmax	8Vmax		
Frequency	50 / 60Hz: ± 0.1%SET						
Resistance	Test Range	0-600mΩ (Rmax <=6 / Iset (Iset: Setting Current)), The max Resistance could be 600mΩ when the current is less than 10A.					
	Accuracy	± (2% Reading + 2 Digit)					
	Resolution	1 mΩ	0.1 mΩ	0.1 mΩ	1 mΩ	0.1 mΩ	
	Setting	Upper Limit	0-600mΩ				
		Lower Limit	0-600mΩ (Less than Upper Limit)				
		Resolution	1mΩ				
	Bias	Range	0 - 100 mΩ				
Resolution		0.1mΩ					
Accuracy		± (2% Setting + 2 Digit)					
Test Time	Range	0, 0.5 - 999.9s (0 = Continuous)					
	Resolution	0.1s					
	Accuracy	± (0.1% + 0.05s)					
Input Power	Voltage	110V, 220V					
	Frequency	47.5-63Hz					
	Power Consumption	<=900VA				<= 800VA	

Safety Tester/Hipot Tester

IV. TH9403 Ground Bond Tester

Features

- Constant current linear amplifier output
- Front panel software calibration, high accuracy
- No RS232, standard PLC interface
- Keyboard lock function
- H9403 and TH9301 are connected to form a two-in-one withstand voltage grounding, Three-in-one withstand voltage insulation grounding tester, convenient and flexible

Brief Introduction

■ TH9403 grounding resistance tester is used to measure the internal grounding resistance of electrical equipment. It reflects the (contact) resistance between the exposed conductive parts of the electrical equipment and the total grounding terminal of the electrical equipment. In order to eliminate the influence of contact resistance on the test, the grounding resistance tester adopts a four-segment measurement method, that is, a current is added between the exposed conductive part of the measured electric and the total ground terminal, and then the voltage at both ends is measured to calculate the resistance value. This product meets GB4706.1-2005, GB9706.1-2007 and other domestic and foreign safety standards, and meets the requirements of JJG984-2004 safety measurement verification regulations.

Specifications

Model	TH9403
Output Current	3-30A ± (2%+2counts)
Output Voltage	6V
Ground Resistance Range	0-510mΩ 10A; 0-120mΩ 10A-30A ± (2%+2counts)
Testing Time	0.1-999.9s
LCD Monitor	16x2 Line Backlit LCD Display
Calibration Mthod	Software Calibration
Memory Device	Can memorize Current, Resistance, Time and other settings
Size and Weight	275mmx100mm340mm/10kg



TH9403

Dimension (mm): 280(W) x 88(H) x 372(D)

Net weight: 10 kg

Application

- Automated test system
- Household appliances
- Transformer, motor
- Electrical equipment
- Electric heating appliances
- Lighting industry
- New energy vehicles
- Electronic components
- Medical equipment

Cable/Harness Tester

IV. TH8601/A Cable/Harness Tester

Features

- 7" TFT LCD truecolor display screen, 16-bit, 800X480 resolution
- Cotex_M3 processor core
- Selectable Chinese and English operation interface
- AC: test frequency of 50Hz-300kHz, accuracy of 0.02%
- DC: test range of 0V-5V and accuracy of 10%
- Maximum 128 pin for sweeping and testing
- Insulation resistance of more than 10G
- Selectable RS232, RS485, GPIB, USB, LAN and Handler interfaces
- USB interface can be used for storage of setup files and test data as well as upgrade of the program

Application

- Communication and IT
telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics
ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable



RS232	USB HOST	USB DEVICE	HANDLER	GPIB	RS485
standard	standard	standard	standard	option	option

TH8601/A

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

- Electronic Industry
Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket
- Components
Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop
- Safety test
AC withstand voltage, DC withstand voltage, insulation insulation

Specifications

Parameters	Range	Specific Index	
Test Pin	TH8601	128 Pin	
	TH8601A	64 Pin	
Test signal source	Sine signal source: 50Hz-300kHz, Programmable capacitance component test 1Vrms	frequency: 0.02%, 1Vrms, Voltage 10%	
	Programmable DC signal source: 5Vdc MAX	10%	
	Programmable DC current source: 1-20mA	10%	
	Programmable DC high voltage source: 1mA Max	5V-100V	10%±1 digit
		100Vdc-1000Vdc	5%±1 digit
	Programmable AC high voltage source: 10mA Max	50V-100Vac	10%±1 digit
100Vac-750Vac		5%±1 digit	
	Channel plate on-off scanning signal source: 5Vdc		
Test speed	Transient open and short circuit (128 points) sample standard: 10ms	indicates the time of sweeping 64 NET O/S at a time	
	Basic value of test speed: 100ms	Indicates the measurement time of single passive component or the total measurement time of one cable	
Capacitance measurement	Range: 0.1pF-300pF (sample 10pFmin)	10%±3 digit	
	Range: 300pF-1000µF	5%±3 digit	
Resistance measurement	10mohm-1Mohm	5%±1 digit	
Cond. /Interval cond.	10mohm-50ohm	5%±5 digit	
Open and short circuit	1kohm-50kohm	10%±1 digit	
Diode Testing	0-10V	10%±1 digit	
Insulation resistance	1Mohm-100Mohm	5%±5 digit	
	100Mohm-1000Mohm	10%±5 digit	
DC leakage current	1µA-1000µA	5%±2 digit	
AC leakage current	0.01mA-5mA	10%±5 digit	

Standard Accessories


- TH26036-R Probe
- TH26060 Transfer Fixture
- TH8601-32 Test Cable

Cable/Harness Tester

IV. TH8602 Series Cable/Harness Tester

Features

- Test Pin: 64-256 pin, four-terminal test
- Conductance, Transient open and short circuit, Hipot, IR, Component test.
- (Patent) High and low voltage separation technology, insulation impedance > 100GΩ
- Built-in 10A independent DC current source for pressure dropping test
- 7" TFT LCD TrueColor display screen, 16-bit, 800X480 resolution
- Firmware update through U disk
- Selectable Chinese and English operation interface
- (Patent) 4 high-pressure test modes: a pair of other, dichotomy, automatic test, grounding test.
- Excellent and reliable ARC detection function
- Testing resistance, capacitance, diode and other components using four-terminal testing technology
- The module equipped with independent read-write chip detects whether the chip in the wire is working normally
- Support for connector testing
- Support multi-file testing, providing flexible solutions for complex wires
- Handler supports up to 40 outputs
- Communication command provides two instruction systems: SCPI
- Provide instrument self-inspection function, check instrument fault on line

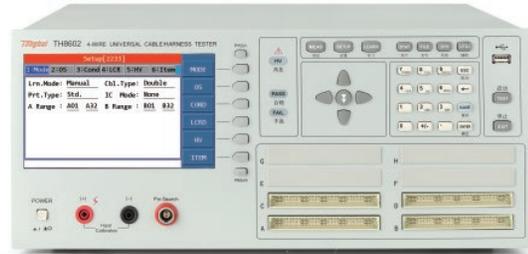

RS232	USB HOST	USB DEVICE	HANDLER	GPIB	RS485
standard	standard	standard	standard	option	option

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)

Weight: 7.5kg

Application

- Communication and IT
telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics
ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable
- Electronic Industry
Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket
- Components
Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop
- Safety test
AC withstand voltage, DC withstand voltage, insulation insulation

Specifications

Specification		TH8602-1	TH8602B	TH8602C	TH8602-2	TH8602-3	TH8602-4
Test Pin		64			128	192	256
Test Signal Source	AC	Frequency	50Hz-100kHz, Accuracy 0.02%				
		Range	0-1Vrms, Accuracy 10%				
	DC	Voltage	0-5V, Accuracy 10%±1 Digit				
Current		1-20mA, Accuracy 10%±1 Digit					
Channel board open-off scan signal source		5Vdc					
Capacitance Measurement		1uF-1000uF, Accuracy: 10%±1 Digit					
DCR		10mΩ-1MΩ, Accuracy: 2%±1 Digit					
Cond./Interval cond.		10mΩ-50Ω					
Open and Short Circuit		1kΩ-50kΩ, Accuracy: 10%±1 Digit					
Diode Testing		0-10V, Accuracy: 10%±1 Digit					
DC withstand voltage	Voltage	5V-1500V, Accuracy: 10%±1 Digit			5V-1000V, Accuracy: 10%±1 Digit		
	Current	1uA-5mA, Accuracy: 10%±5 Digit			1uA-5mA, Accuracy: 10%±5 Digit		
AC withstand voltage	Voltage	50V-1000V, Accuracy: 10%±1 Digit			50V-750V, Accuracy: 10%±1 Digit		
	Current	0.01mA-5mA, Accuracy: 10%±5 Digit			0.01mA-5mA, Accuracy: 10%±5 Digit		
Insulation Resistance	Voltage	5V-1500V, Accuracy: 10%±1 Digit			5V-1000V, Accuracy: 10%±1 Digit		
	Resistance	1MΩ-1GΩ, Accuracy: 10%±5 Digit			1MΩ-1GΩ, Accuracy: 10%±5 Digit		
TYPE-C Cable Test	EMARK chip content read and write check	----	√	√	----	----	----
	5A independent constant source	----	----	√	----	----	----
	5A20V pressure drop test	----	----	√	----	----	----
Test Speed		Instant breakpoint: 4ms Instantaneous circuit: 5μs-2ms					

Standard Accessories

TH26060D Probe
TH26060B Transfer Fixture
TH8601-32 Test Cable

Cable/Harness Tester

IV. TH8603-4 Cable/Harness Tester



Features


- 7-inch TFTLCD true color display, 800X480 resolution, 16-bit color.
- Internal storage space 3M
- Support U disk to store test files
- One-click screen capture function, pictures are automatically stored to U disk
- The program can be upgraded online via U disk
- Chinese and English optional operation interface
- Maximum provides 512 (two-wire)/256 (four-wire) channels, divided into 8 slots A, B, C, D, E, F, G, H
- (Patent) Provides 750VAC and 1000VDC high voltage test functions, adopts high and low voltage separation technology, makes its own insulation resistance up to 100G or more, and has a wider test range
- (Patent) Provide 4 kinds of high voltage test methods: one pair of other, dichotomy, automatic test, ground test 4 methods
- Provide excellent and reliable arc detection function
- Testing resistance, capacitance, diode and other components, using four-terminal test technology, higher test accuracy; using voltage and current separation parallel sampling technology, sampling data faster
- Support Typec related wire test, provide a complete test plan, and add the function of one-key setting of components.
- An independent DC constant current source is set inside, which can provide a maximum of 10A constant current source for measuring the voltage drop of the line
- An independent read-write chip module is built in to check whether the chip in the wire is normal
- Support connector test, provide multi-product test function, and signal output of each product.
- Support multi-file testing, providing more and more flexible testing solutions for complex wires.
- HANDLER interface, supports 16 outputs, all options are relay driven, and the user can freely define the signal and level of each channel
- Communication command provides SCPI command system
- Provide instrument self-check function and maintenance function, and can perform online troubleshooting of instrument faults

Application

- Communication and IT
telephone lines, network cables, multi-strand cables, mobile phone screen cables, TYPE-C data cables, USB data cables, laptop screen cables, HDMI cables, VGA cables, IDE hard disk cables, SATA hard disks Connection line etc.
- Automotive Electronics
ECU cable, automotive wiring harness, navigation cable, navigation screen cable, car electronic product cable, audio and video cable
- Electronic Industry
Flat wire, flat wire, connector, power cord, multiplexer, RS232 connection line, GPIB cable, USB extension cable, multi-core socket
- Components
Passive components: capacitors, inductors, resistors, diodes, capacitor polarity, voltage drop
- Safety test
AC withstand voltage, DC withstand voltage, insulation insulation

Standard Accessories

- Three-core power cord
- TH26060D Probe
- TH26060B Transfer Fixture
- TH8601-32 Test Cable

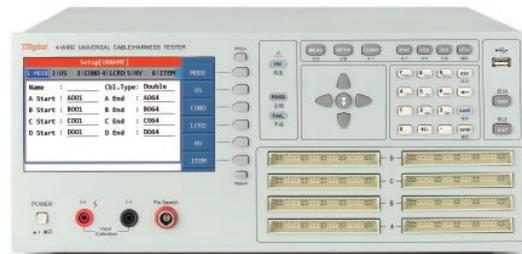







RS232	USB HOST	USB DEVICE	HANDLER	GPIB	RS485
standard	standard	standard	standard	option	option

Dimension(mm): 425mm(W)x177mm(H)x355mm(D)
Weight: 7.5kg


Specifications

Specification	TH8603-4		
Test Pin	512		
Test Signal Source	AC	Frequency	50Hz-100kHz, Accuracy 0.02%
		Range	0-1Vrms, Accuracy 10%
	DC	Voltage	0-5V, Accuracy 10%±1 Digit
		Current	1-15mA, Accuracy 10%±1 Digit
	Channel board open-off scan signal source		5Vdc
Capacitance Measurement			1nF-1000μF, Accuracy: 10%±1 Digit
DCR			10mΩ-1MΩ, Accuracy: 2%±1 Digit
Cond./Interval cond.			0.1Ω-950Ω
Open and Short Circuit			1kΩ-50kΩ, Accuracy: 10%±1 Digit
Diode Testing			0-10V, Accuracy: 10%±1 Digit
DC withstand voltage	Voltage	5V-1000V, Accuracy 5V-100V, 10%±1 Digit, 100V-1000V, 5%±1 Digit	
	Current	1uA-1000uA, Accuracy: 10%±5 Digit	
AC withstand voltage	Voltage	50V-750V, Accuracy 50V-100V, 10%±1 Digit, 100V-750V, 5%±1 Digit	
	Current	0.01mA-5mA, Accuracy: 10%±5 Digit	
Insulation Resistance	Voltage	5V-1000V, Accuracy: 10%±1 Digit	
	Resistance	1MΩ-1GΩ, Accuracy: 10%±5 Digit	
Test Speed			Momentary Short Circuit: 20ms(512 Dots)
Basic Test Speed: 100ms			Basic Test Speed: 100ms

V. Instrument Accessories & Options

 TH26001A	 TH26003	 TH26004S-1	 TH26004A	 TH26004B
 TH26004C	 TH26004D	 TH26004F	 TH26004E-1	 TH26005A
 TH26005B	 TH26006	 TH26007A	 TH26008A	 TH26009A
 TH26009B	 TH26009C	 TH26010	 TH26011AS	 TH26011BS
 TH26011CS	 TH26013	 TH26018	 TH26019	 TH26023
 TH26027	 TH26027AS	 TH26028	 TH26029	 TH26029B
 TH26029C	 TH26033	 TH26034	 TH2883-01	 TH2882AS-01

V. Instrument Accessories & Options

				
TH26036	TH26038	TH26047	TH26048	TH26048A
				
TH26050S	TH26052	TH26053	TH26065	PT500
				
TH1901A	TH1901B	TH1801-EXT1A(2.54)	TH1801-EXT2A	TH1801-EXT3A(5.0/5.0)
				
TH1801-EXT4	TH1801-EXT8A(3.3/3.3)	TH1801-EXT9A(4.0/4.0)	TH1801-EXT11A(5.0/5.0)	TH1801-001
				
TH1802A	TH1902A	TH2881-001	TH10001	TH10002
				
TH10101A	TH10201	TH10202	TH19001 TH19002	TH5100-IL
				
TH90003	TH90004	TH1778-01	TH1778-02	TH1778-03

CHANGZHOU TONGHUI ELECTRONIC CO.,LTD.

Addr: No.1, Xinzhu Road, New District, ChangZhou, JiangSu, 213034 China.

Tel: +86 519 85195566

Fax: +86 519 85109972

Email: lq@tonghui.com.cn

dx.han@tonghui.com.cn

Website: en.tonghui.com.cn

