

M9416A VXT PXIe Vector Transceiver

380 MHz to 12.3 GHz



Table of Contents

Technical Specifications.....	3
Vector Signal Analyzer.....	4
Vector Signal Generator.....	8
Front Panel.....	14
General Specifications	15
WLAN Measurement Application Key Specifications.....	16
WLAN Source Key Specifications	16
5G NR Measurement Application Key Specifications	18
5G NR Source Key Specifications	19
LTE/LTE-Advanced FDD & LTE/LTE-Advanced TDD Measurement Application Key Specifications	22
LTE Source Key Specifications.....	22
W-CDMA/HSPA+ Measurement Application Key Specifications.....	23
W-CDMA/HSPA+ Source Key Specifications	24
Related Literature.....	25
Web	25

Technical Specifications

Definitions and conditions

Specifications describe the warranted performance of calibrated instruments. Data represented in this document are specifications under the following conditions unless otherwise noted.

- Specifications are valid from 45 to 75 °C for individual module temperature, as reported by the module, and 20 to 35 °C for environment temperature unless otherwise noted
- Calibrated instrument has been stored for a minimum of 2 hours within the allowed operating range
- If instrument has previously been stored at a temperature range inside the allowed storage range, but outside the allowed operating range, instrument must have been stored for a minimum of 2 hours within the allowed operating range before turn-on
- 45-minute warm-up time with the Modular TRX application running
- Calibration cycle maintained
- When used with Keysight M9300A frequency reference and Keysight interconnect cables
- An “All Alignment” has been run within the previous 7 days
- A “Fast Alignment” has been run:
 - Within the previous 8 hours
 - If the environmental temperature has changed more than 5°C from the previous Fast Alignment

Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 95 percent of the units exhibit with a 95 percent confidence level. This data does not include measurement uncertainty and is valid only at room temperature (approximately 25 °C) after alignment within the stated alignment time and temperature limits.

Nominal values indicate expected performance or describe product performance that is useful in the application of the product but are not covered by the product warranty.

Recommended best practices in use

- Use slot blockers and EMC filler panels in empty module slots to ensure proper operating temperatures. Keysight chassis and slot blockers optimize module temperature performance and reliability of test.
- Set chassis fan to high at environmental temperatures above 35 °C.

Vector Signal Analyzer

Performance

Capture depth

Standard (Option M02)	256 MSa of IQ data
Option M05	512 MSa of IQ data

Frequency

Frequency range

Option F06	380 MHz to 6 GHz
Option F08	380 MHz to 8 GHz
Option F12	380 MHz to 12.3 GHz

Frequency reference

Accuracy, aging rate, stability	Refer to M9300A specifications
---------------------------------	--------------------------------

Frequency readout accuracy

CW	$\pm (\text{marker frequency} \times \text{frequency reference accuracy} + 0.10\% \times \text{span} + 5\% \times \text{RBW} + 2 \text{ Hz} + 0.5 \times \text{horizontal resolution})$
Demodulation	$\pm (\text{center frequency} \times \text{frequency reference accuracy} + 1 \text{ Hz})$
Resolution	1 Hz

Analysis Bandwidth

Standard (Option B4X)	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 12.3 GHz	400 MHz
Option B8X	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 2 GHz	600 MHz
	2 to 12.3 GHz	800 MHz
Option B12	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 2 GHz	600 MHz
	2 to 12.3 GHz	1.2 GHz

Triggering

Trigger

IQ analyzer	Free run, External 1, External 2, RF burst, Video, Periodic, PXI, Internal
Trigger delay range	-150 to 500 ms
Resolution	1/sample rate

Maximum safe input level

Average power input

RF input port	+27 dBm
Option HDX, Half duplex port	+27 dBm

DC volts

RF input port	30 Vdc
Option HDX, Half duplex port	30 Vdc

Absolute Amplitude Accuracy (CW mode) ¹

RF input port			
Frequency Range	-70 dBm ≤ Input level < +10 dBm	+10 dBm ≤ Input level ≤ +20 dBm	+20 dBm < Input level ≤ +27 dBm
380 MHz to 1.31 GHz	< ± 0.50 dB, < ± 0.20 dB typical	< ± 0.60 dB, < ± 0.30 dB typical	< ± 1.00 dB, < ± 0.70 dB typical
1.31 to 4.3 GHz	< ± 0.60 dB, < ± 0.25 dB typical	< ± 0.65 dB, < ± 0.30 dB typical	< ± 1.00 dB, < ± 0.65 dB typical
4.3 to 8.4 GHz	< ± 0.55 dB, < ± 0.25 dB typical	< ± 0.55 dB, < ± 0.25 dB typical	< ± 0.75 dB, < ± 0.40 dB typical
8.4 to 11.4 GHz	< ± 0.60 dB, < ± 0.30 dB typical	< ± 0.80 dB, < ± 0.40 dB typical	< ± 0.90 dB, < ± 0.50 dB typical
11.4 to 12.3 GHz	< ± 0.70 dB, < ± 0.35 dB typical	< ± 0.85 dB, < ± 0.45 dB typical	< ± 1.25 dB, < ± 0.70 dB typical

Half duplex port, Option HDX

Frequency Range	-70 dBm ≤ Input level < +10 dBm	+10 dBm ≤ Input level ≤ +20 dBm	+20 dBm < Input level ≤ +27 dBm
380 MHz to 1.31 GHz	< ± 0.50 dB, < ± 0.25 dB typical	< ± 0.60 dB, < ± 0.30 dB typical	< ± 1.15 dB, < ± 0.85 dB typical
1.31 to 4.3 GHz	< ± 0.60 dB, < ± 0.25 dB typical	< ± 0.65 dB, < ± 0.30 dB typical	< ± 1.30 dB, < ± 0.80 dB typical
4.3 to 8.4 GHz	< ± 0.70 dB, < ± 0.30 dB typical	< ± 0.60 dB, < ± 0.30 dB typical	< ± 0.85 dB, < ± 0.50 dB typical
8.4 to 11.4 GHz	< ± 0.75 dB, < ± 0.40 dB typical	< ± 0.75 dB, < ± 0.35 dB typical	< ± 0.95 dB, < ± 0.55 dB typical
11.4 to 12.3 GHz	< ± 0.80 dB, < ± 0.40 dB typical	< ± 0.90 dB, < ± 0.45 dB typical	< ± 1.15 dB, < ± 0.65 dB typical

Input Voltage Standing Wave Ratio (VSWR)

	RF input port	Half Duplex Port (configured to input mode)
380 MHz to 4.3 GHz	< 1.55:1, < 1.4:1 typical	< 1.55:1, < 1.4:1 typical
4.3 to 5.8 GHz	< 1.4:1, < 1.3:1 typical	< 1.55:1, < 1.4:1 typical
5.8 to 7.2 GHz	< 1.8:1, < 1.6:1 typical	< 1.9:1, < 1.7:1 typical
7.2 to 10.2 GHz	< 1.6:1, < 1.4:1 typical	< 1.6:1, < 1.4:1 typical
10.2 to 12.3 GHz	< 2.0:1, < 1.9:1 typical	< 2.0:1, < 1.9:1 typical

Displayed Average Noise Floor (DANL) ²

	RF input port, with analyzer ranged to -70 dBm	Half duplex port (option HDX) with analyzer ranged to -70 dBm
380 MHz to 4.3 GHz	-165 dBm, -167 dBm typical	-160 dBm, -162 dBm typical
4.3 to 10.2 GHz	-165 dBm, -167 dBm typical	-158 dBm, -161 dBm typical
10.2 to 12.3 GHz	-162 dBm, -165 dBm typical	-155 dBm, -157 dBm typical

Third-order Intermodulation Distortion (TOI, with analyzer ranged to +10 dBm)

380 MHz to 4.3 GHz	+30 dBm, +32 dBm typical
4.3 to 6 GHz	+28 dBm, +30 dBm typical
6 to 12.3 GHz	+27 dBm, +29 dBm typical

1. Signal is measured at 1.1 MHz offset from the center frequency. Otherwise, an IF flatness error must be added.

2. Input terminated, LNA on, log power average, and normalized to 1 Hz bandwidth.

Phase Noise Sidebands (CF = 1 GHz)

1 kHz offset	-114 dBc/Hz, -116 dBc/Hz typical
10 kHz offset	-128 dBc/Hz, -130 dBc/Hz typical
100 kHz offset	-132 dBc/Hz, -134 dBc/Hz typical
1 MHz offset	-135 dBc/Hz, -137 dBc/Hz typical
10 MHz offset	-139 dBc/Hz, -141 dBc/Hz typical

Phase noise at 1 GHz, versus offset frequency, measured

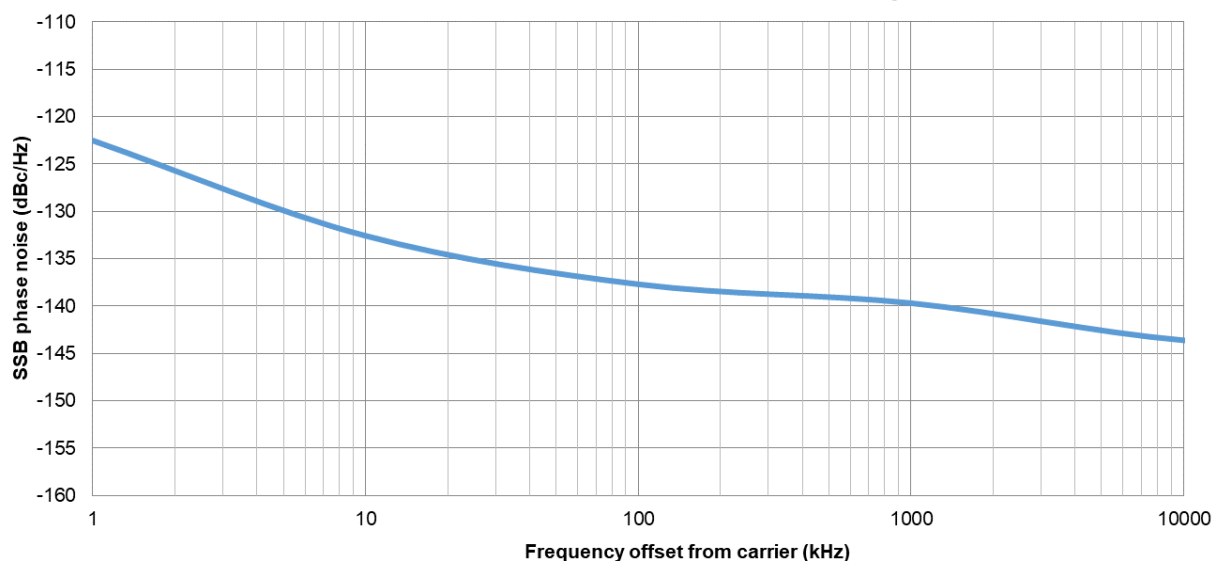


Figure 1. Phase noise from 1 kHz to 10 MHz offset at 1 GHz

Spurious Responses

Residual responses

RF input port; Option HDX, half duplex port; with analyzer ranged to +10 dBm; offset from 10 MHz to 1/2 × analysis bandwidth

380 MHz to 9 GHz	< -79 dBm, < -82 dBm typical
9 to 9.6 GHz	< -76 dBm, < -80 dBm typical
9.6 to 12.3 GHz	< -81 dBm, < -83 dBm typical

Image responses, nominal

Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	-63 dBc	N/A	N/A	N/A	N/A	N/A
550 MHz to 1.31 GHz	-62 dBc	-60 dBc	N/A	N/A	N/A	N/A
s1.31 to 2 GHz	-62 dBc	-60 dBc	-60 dBc	-60 dBc	N/A	N/A
2 to 4.3 GHz	-62 dBc	-60 dBc	-60 dBc	-60 dBc	-58 dBc	-56 dBc
4.3 to 4.6 GHz	-63 dBc	-63 dBc	-60 dBc	-60 dBc	-58 dBc	-56 dBc
4.6 to 12.3 GHz	-63 dBc	-63 dBc	-60 dBc	-60 dBc	-59 dBc	-58 dBc

Sideband spurs, nominal

1 kHz to 10 MHz offset	-85 dBc
------------------------	---------

LO Feedthrough (dBr ¹)

	RF input port, with analyzer ranged from –30 to +27 dBm	Option HDX, half duplex port, with analyzer ranged from –25 to +27 dBm
380 MHz to 12.3 GHz	–52 dBr, –62 dBr <i>typical</i>	–52 dBr, –62 dBr <i>typical</i>

IF Flatness

RF input port, –25 dBm ≤ Input level ≤ +10 dBm, typical indicated by <i>italics</i>						
Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	± 0.90 dB, ± 0.50 dB	N/A	N/A	N/A	N/A	N/A
550 MHz to 1.31 GHz	± 0.70 dB, ± 0.35 dB	± 0.70 dB, ± 0.40 dB	N/A	N/A	N/A	N/A
1.31 to 1.62 GHz	± 0.70 dB, ± 0.35 dB	± 0.70 dB, ± 0.40 dB	± 1.20 dB, ± 0.70 dB	± 1.50 dB, ± 0.95 dB	N/A	N/A
1.62 to 2 GHz	± 0.70 dB, ± 0.35 dB	± 0.70 dB, ± 0.40 dB	± 0.65 dB, ± 0.30 dB	± 0.65 dB, ± 0.30 dB	N/A	N/A
2 to 3.5 GHz	± 0.50 dB, ± 0.15 dB	± 0.55 dB, ± 0.25 dB	± 0.65 dB, ± 0.30 dB	± 0.65 dB, ± 0.30 dB	± 0.60 dB, ± 0.25 dB	± 0.75 dB, ± 0.35 dB
3.5 to 4.3 GHz	± 0.55 dB, ± 0.20 dB	± 0.55 dB, ± 0.25 dB	± 0.80 dB, ± 0.40 dB	± 0.80 dB, ± 0.40 dB	± 0.80 dB, ± 0.40 dB	± 0.85 dB, ± 0.45 dB
4.3 to 12.3 GHz	± 1.00 dB, ± 0.50 dB	± 1.00 dB, ± 0.50 dB	± 1.10 dB, ± 0.65 dB	± 1.15 dB, ± 0.70 dB	± 1.15 dB, ± 0.70 dB	± 1.25 dB, ± 0.80 dB
Half duplex port, Option HDX, –25 dBm ≤ Input level ≤ +10 dBm, typical indicated by <i>italics</i>						
Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	± 0.90 dB, ± 0.55 dB	N/A	N/A	N/A	N/A	N/A
550 MHz to 1.31 GHz	± 0.70 dB, ± 0.35 dB	± 0.80 dB, ± 0.40 dB	N/A	N/A	N/A	N/A
1.31 to 1.62 GHz	± 0.70 dB, ± 0.35 dB	± 0.80 dB, ± 0.40 dB	± 1.15 dB, ± 0.70 dB	± 1.55 dB, ± 0.95 dB	N/A	N/A
1.62 to 2 GHz	± 0.70 dB, ± 0.35 dB	± 0.80 dB, ± 0.40 dB	± 0.60 dB, ± 0.30 dB	± 0.60 dB, ± 0.30 dB	N/A	N/A
2 to 3.5 GHz	± 0.45 dB, ± 0.15 dB	± 0.55 dB, ± 0.25 dB	± 0.60 dB, ± 0.25 dB	± 0.60 dB, ± 0.25 dB	± 0.65 dB, ± 0.30 dB	± 0.70 dB, ± 0.35 dB
3.5 to 4.3 GHz	± 0.50 dB, ± 0.20 dB	± 0.60 dB, ± 0.20 dB	± 0.75 dB, ± 0.40 dB	± 0.75 dB, ± 0.40 dB	± 1.00 dB, ± 0.55 dB	± 1.35 dB, ± 0.80 dB
4.3 to 12.3 GHz	± 0.85 dB, ± 0.40 dB	± 1.00 dB, ± 0.50 dB	± 1.10 dB, ± 0.60 dB	± 1.25 dB, ± 0.70 dB	± 1.30 dB, ± 0.75 dB	± 1.35 dB, ± 0.80 dB

1. dBr is LO feedthrough power relative to the range level of the receiver.

Vector Signal Generator

Performance

Arb sample memory (storage capacity)		
Standard (Option M02)		256 MSa of IQ data
Option M05		512 MSa of IQ data
Frequency range		
Option F06		380 MHz to 6 GHz
Option F08		380 MHz to 8 GHz
Option F12		380 MHz to 12.3 GHz
Frequency reference		
Accuracy, aging rate, stability		Refer to M9300A specifications
Frequency accuracy		
± (output frequency × frequency reference accuracy + 0.001 Hz)		
Frequency switching speed ¹		
SCPI mode		≤ 14 ms nominal
IVI mode		≤ 6 ms nominal
Signal generation bandwidth		
	Center frequency	Maximum bandwidth
Standard (Option B4X)	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 12.3 GHz	400 MHz
Option B8X	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 2 GHz	600 MHz
	2 to 12.3 GHz	800 MHz
Option B12	380 to 550 MHz	100 MHz
	550 MHz to 1.31 GHz	200 MHz
	1.31 to 2 GHz	600 MHz
	2 to 12.3 GHz	1.2 GHz
Output level range (CW mode)		
RF output port		
380 MHz to 12.3 GHz		–120 to +5 dBm
Option HDX, half duplex port (configured to output mode)		
380 MHz to 12.3 GHz		–120 to +5 dBm
RF output port, Option 1EA		
380 MHz to 12.3 GHz		–120 to +20 dBm, +25 dBm settable
Option HDX, half duplex port (configured to output mode), Option 1EA		
380 MHz to 12.3 GHz		–120 to +10 dBm
Maximum reverse power		
Average power input		+27 dBm
DC volts		30 Vdc
Amplitude switching speed ¹		
SCPI mode		≤ 10 ms nominal
IVI mode		≤ 5 ms nominal

1. Switching speed depends highly upon the hardware and controller that is used. Measurements were made with the M9416A in an M9018B chassis with the M9037A embedded controller, Windows 10 Operating System.

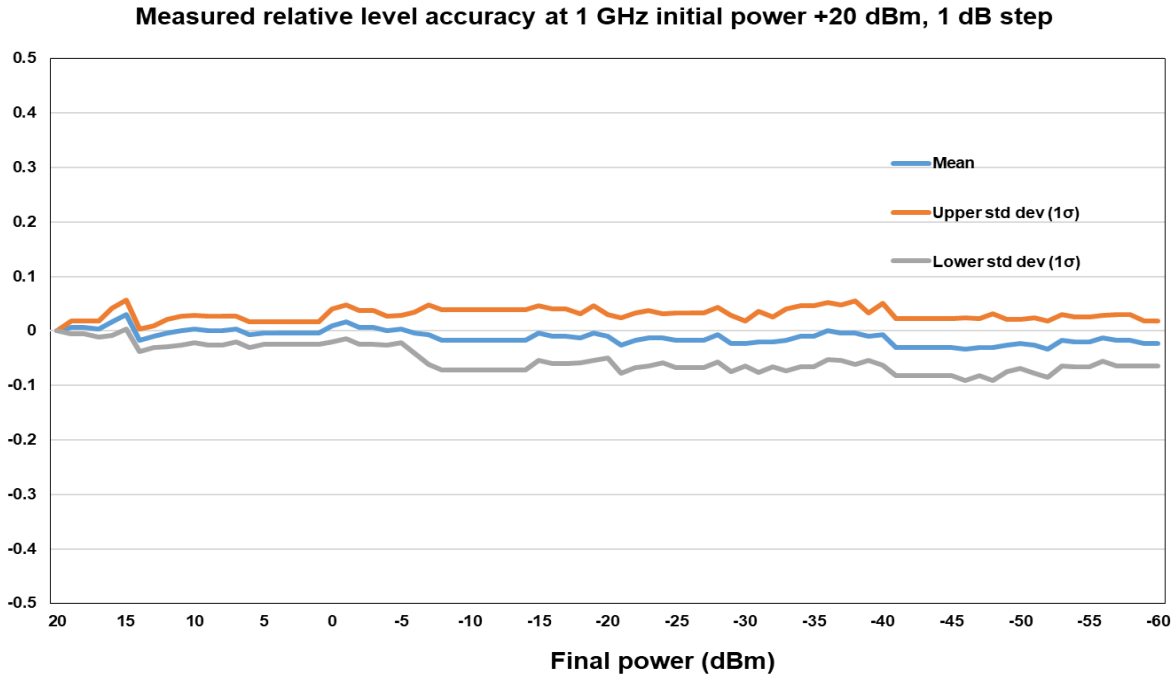


Figure 2. Measured relative level accuracy at 1 GHz

Absolute level accuracy (CW mode)

RF output port, typical indicated by <i>italics</i>						
Frequency range	380 to 550 MHz	550 MHz to 4.3 GHz	4.3 to 6 GHz	6 to 7.8 GHz	7.8 to 10.2 GHz	10.2 to 12.3 GHz
+10 dBm < Level ≤ +20 dBm	< ± 0.60 dB, < ± 0.25 <i>dB</i>	< ± 0.75 dB, < ± 0.35 <i>dB</i>	< ± 0.90 dB, < ± 0.45 <i>dB</i>	< ± 1.00 dB, < ± 0.45 <i>dB</i>	< ± 0.85 dB, < ± 0.45 <i>dB</i>	< ± 0.85 dB, < ± 0.45 <i>dB</i>
0 dBm < Level ≤ +10 dBm	< ± 0.55 dB, < ± 0.25 <i>dB</i>	< ± 0.65 dB, < ± 0.30 <i>dB</i>	< ± 0.80 dB, < ± 0.40 <i>dB</i>	< ± 0.85 dB, < ± 0.45 <i>dB</i>	< ± 0.75 dB, < ± 0.35 <i>dB</i>	< ± 0.65 dB, < ± 0.30 <i>dB</i>
-60 dBm ≤ Level ≤ 0 dBm	< ± 0.55 dB, < ± 0.25 <i>dB</i>	< ± 0.55 dB, < ± 0.25 <i>dB</i>	< ± 0.60 dB, < ± 0.25 <i>dB</i>	< ± 0.60 dB, < ± 0.20 <i>dB</i>	< ± 0.75 dB, < ± 0.25 <i>dB</i>	< ± 0.70 dB, < ± 0.20 <i>dB</i>
-90 dBm ≤ Level < -60 dBm	< ± 0.55 dB, < ± 0.25 <i>dB</i>	< ± 0.55 dB, < ± 0.25 <i>dB</i>	< ± 0.65 dB, < ± 0.35 <i>dB</i>	< ± 0.95 dB, < ± 0.50 <i>dB</i>	< ± 0.75 dB, < ± 0.35 <i>dB</i>	< ± 1.00 dB, < ± 0.50 <i>dB</i>
-100 dBm ≤ Level < -90 dBm	< ± 0.75 dB, < ± 0.35 <i>dB</i>	< ± 0.75 dB, < ± 0.40 <i>dB</i>	< ± 0.70 dB, < ± 0.30 <i>dB</i>	< ± 0.95 dB, < ± 0.50 <i>dB</i>	< ± 0.75 dB, < ± 0.35 <i>dB</i>	< ± 1.10 dB, < ± 0.50 <i>dB</i>
-110 dBm ≤ Level < -100 dBm	< ± 0.85 dB, < ± 0.45 <i>dB</i>	< ± 0.90 dB, < ± 0.55 <i>dB</i>	< ± 0.90 dB, < ± 0.50 <i>dB</i>	< ± 0.95 dB, < ± 0.55 <i>dB</i>	< ± 0.85 dB, < ± 0.45 <i>dB</i>	< ± 1.10 dB, < ± 0.60 <i>dB</i>

Option HDX, half duplex port, typical indicated by *italics*

Frequency range	380 to 550 MHz	550 MHz to 4.3 GHz	4.3 to 6 GHz	6 to 7.8 GHz	7.8 to 10.2 GHz	10.2 to 12.3 GHz
0 dBm < Level ≤ +10 dBm	< ± 0.50 dB, < ± 0.20 dB	< ± 0.50 dB, < ± 0.20 dB	< ± 0.65 dB, < ± 0.30 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.60 dB, < ± 0.25 dB	< ± 0.70 dB, < ± 0.40 dB
-60 dBm ≤ Level ≤ 0 dBm	< ± 0.50 dB, < ± 0.20 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.65 dB, < ± 0.30 dB	< ± 0.50 dB, < ± 0.25 dB	< ± 0.70 dB, < ± 0.25 dB	< ± 0.70 dB, < ± 0.30 dB
-90 dBm ≤ Level < -60 dBm	< ± 0.50 dB, < ± 0.20 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.65 dB, < ± 0.30 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.60 dB, < ± 0.25 dB
-100 dBm ≤ Level < -90 dBm	< ± 0.65 dB, < ± 0.35 dB	< ± 0.65 dB, < ± 0.35 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.55 dB, < ± 0.25 dB	< ± 0.60 dB, < ± 0.30 dB
-110 dBm ≤ Level < -100 dBm	< ± 0.80 dB, < ± 0.40 dB	< ± 0.95 dB, < ± 0.55 dB	< ± 0.70 dB, < ± 0.40 dB	< ± 0.70 dB, < ± 0.40 dB	< ± 0.65 dB, < ± 0.40 dB	< ± 0.80 dB, < ± 0.50 dB

Measured amplitude repeatability
RF output port, 0 dBm output power, 1 GHz, 25 °C

Delta from initial value < ± 0.10 dB nominal

Setting resolution

0.01 dB

Output Voltage Standing Wave Ratio (VSWR)
RF output port

380 MHz to 1.31 GHz	< 1.90:1, < 1.70:1 <i>typical</i>
1.31 to 7.8 GHz	< 1.75:1, < 1.65:1 <i>typical</i>
7.8 to 10.2 GHz	< 1.75:1, < 1.60:1 <i>typical</i>
10.2 to 12.3 GHz	< 2.00:1, < 1.70:1 <i>typical</i>

Option HDX, half duplex port (configured to output mode)

380 MHz to 1.31 GHz	< 1.90:1, < 1.75:1 <i>typical</i>
1.31 to 6 GHz	< 1.75:1, < 1.40:1 <i>typical</i>
6 to 10.2 GHz	< 1.65:1, < 1.50:1 <i>typical</i>
10.2 to 12.3 GHz	< 1.90:1, < 1.55:1 <i>typical</i>

Harmonics
RF output port
0 dBm output power

380 MHz to 4.3 GHz	< -41 dBc, < -45 dBc <i>typical</i>
4.3 to 5.8 GHz	< -36 dBc, < -42 dBc <i>typical</i>
5.8 to 10.2 GHz	< -34 dBc, < -39 dBc <i>typical</i>
10.2 to 12.3 GHz	< -41 dBc, < -46 dBc <i>typical</i>

+10 dBm output power, with Option 1EA

380 MHz to 4.3 GHz	< -31 dBc, < -35 dBc <i>typical</i>
4.3 to 5.8 GHz	< -27 dBc, < -33 dBc <i>typical</i>
5.8 to 9 GHz	< -26 dBc, < -31 dBc <i>typical</i>
9 to 10.2 GHz	< -24 dBc, < -29 dBc <i>typical</i>
10.2 to 12.3 GHz	< -29.5 dBc, < -35 dBc <i>typical</i>

Option HDX, half duplex port, –5 dBm output power

380 MHz to 4.3 GHz	< –36 dBc, < –40 dBc <i>typical</i>
4.3 to 5.8 GHz	< –33 dBc, < –38 dBc <i>typical</i>
5.8 to 10.2 GHz	< –32 dBc, < –37 dBc <i>typical</i>
10.2 to 12.3 GHz	< –36 dBc, < –42 dBc <i>typical</i>

Non-harmonic spurious (CW mode)**RF output port, Option HDX, half duplex port, 0 dBm output power**

380 MHz to 4.3 GHz	< –65 dBc, < –70 dBc <i>typical</i>
4.3 to 6.5 GHz	< –47 dBc, < –52 dBc <i>typical</i>
6.5 to 9.6 GHz	< –57 dBc, < –62 dBc <i>typical</i>
9.6 to 11.4 GHz	< –50 dBc, < –56 dBc <i>typical</i>
11.4 to 12.3 GHz	< –51 dBc, < –60 dBc <i>typical</i>

LO feedthrough**RF output port, Option HDX, half duplex port, 0 dBm output power**

380 MHz to 1.31 GHz	–51 dBc, –65 dBc <i>typical</i>
1.31 to 1.62 GHz	–46 dBc, –59 dBc <i>typical</i>
1.62 to 2 GHz	–44 dBc, –58 dBc <i>typical</i>
2 to 4.3 GHz	–42 dBc, –54 dBc <i>typical</i>
4.3 to 12.3 GHz	–46 dBc, –52 dBc <i>typical</i>

Image responses**RF output port, 0 dBm output power, typical indicated by *italics***

Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	–55 dBc, –61 dBc	N/A	N/A	N/A	N/A	N/A
550 MHz to 1.31 GHz	–54 dBc, –60 dBc	–54 dBc, –59 dBc	N/A	N/A	N/A	N/A
1.31 to 2 GHz	–53 dBc, –59 dBc	–52 dBc, –58 dBc	–51 dBc, –57 dBc	–49 dBc, –54 dBc	N/A	N/A
2 to 12.3 GHz	–52 dBc, –58 dBc	–51 dBc, –57 dBc	–51 dBc, –54 dBc	–50 dBc, –54 dBc	–49 dBc, –53 dBc	–46 dBc, –50 dBc

Option HDX, half duplex port, 0 dBm output power, typical indicated by *italics*

Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	–55 dBc, –61 dBc	N/A	N/A	N/A	N/A	N/A
550 MHz to 1.31 Hz	–54 dBc, –60 dBc	–53 dBc, –57 dBc	N/A	N/A	N/A	N/A
1.31 to 2 GHz	–51 dBc, –58 dBc	–50 dBc, –57 dBc	–50 dBc, –56 dBc	–49 dBc, –55 dBc	N/A	N/A
2 to 12.3 GHz	–51 dBc, –57 dBc	–49 dBc, –58 dBc	–48 dBc, –54 dBc	–48 dBc, –53 dBc	–47 dBc, –51 dBc	–45 dBc, –48 dBc

Sideband spurious

RF output port, Option HDX, half duplex port, 0 dBm output power

Offset	380 MHz to 4.3 GHz	4.3 to 6 GHz	6 to 10.2 GHz	10.2 to 12.3 GHz
1 to 100 kHz	-70 dBc, -76 dBc typical	-66 dBc, -72 dBc typical	-62 dBc, -69 dBc typical	-60 dBc, -65 dBc typical
100 kHz to 1 MHz	-89 dBc, -95 dBc typical	-86 dBc, -92 dBc typical	-84 dBc, -89 dBc typical	-70 dBc, -75 dBc typical
1 to 10 MHz	-90 dBc, -96 dBc typical	-88 dBc, -94 dBc typical	-87 dBc, -93 dBc typical	-81 dBc, -86 dBc typical

Phase noise

RF output port, 0 dBm; Option HDX, half duplex port, 0 dBm; Option 1EA, +10 dBm; Center frequency = 1 GHz

1 kHz offset	-105 dBc/Hz, -115 dBc/Hz typical
10 kHz offset	-126 dBc/Hz, -133 dBc/Hz typical
100 kHz offset	-134 dBc/Hz, -139 dBc/Hz typical
1 MHz offset	-141 dBc/Hz, -145 dBc/Hz typical
10 MHz offset	-142 dBc/Hz, -145 dBc/Hz typical

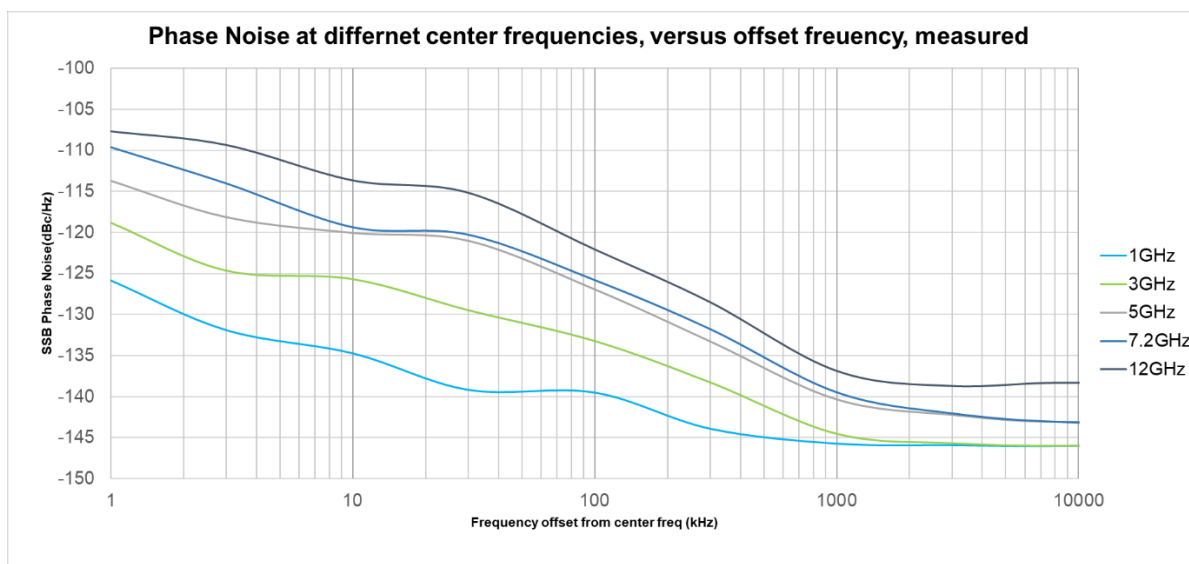


Figure 3. Measured phase noise from 1 kHz to 10 MHz offset at 1, 3, 5, 7.2 and 12 GHz

Broadband noise floor ¹

RF output port, output level = 0 dBm

380 to 550 MHz	-131 dBm/Hz, -135 dBm/Hz typical
550 MHz to 4.3 GHz	-133 dBm/Hz, -137 dBm/Hz typical
4.3 to 10.2 GHz	-131 dBm/Hz, -135 dBm/Hz typical
10.2 to 12.3 GHz	-133 dBm/Hz, -136 dBm/Hz typical

Option HDX, half duplex port, output level = -10 dBm

380 to 550 MHz	-142 dBm/Hz, -147 dBm/Hz typical
550 MHz to 4.3 GHz	-143 dBm/Hz, -147 dBm/Hz typical
4.3 to 10.2 GHz	-139 dBm/Hz, -144 dBm/Hz typical
10.2 to 12.3 GHz	-141 dBm/Hz, -145 dBm/Hz typical

1. Measured at 10.1 MHz offset from the center frequency.

Third-order Intermodulation distortion (TOI)

RF output port, output level = 0 dBm

380 MHz to 7.8 GHz	+24 dBm, +27 dBm <i>typical</i>
7.8 to 10.2 GHz	+23 dBm, +25 dBm <i>typical</i>
10.2 to 12.3 GHz	+21 dBm, +24 dBm <i>typical</i>

Option HDX, half duplex port, output level = 0 dBm

380 to 550 MHz	+25 dBm, +28 dBm <i>typical</i>
550 MHz to 4.3 GHz	+23 dBm, +26 dBm <i>typical</i>
4.3 to 7.8 GHz	+20 dBm, +24 dBm <i>typical</i>
7.8 to 10.2 GHz	+18 dBm, +22 dBm <i>typical</i>
10.2 to 12.3 GHz	+17 dBm, +20 dBm <i>typical</i>

IF flatness

RF output port, $-30 \text{ dBm} \leq \text{Level} \leq +10 \text{ dBm}$, sample rate = 1.25 x bandwidth, typical indicated by *italics*

Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	$\pm 0.80 \text{ dB}$, $\pm 0.35 \text{ dB}$	N/A	N/A	N/A	N/A	N/A
550 to 680 MHz	$\pm 0.75 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.40 \text{ dB}$	N/A	N/A	N/A	N/A
680 to 730 MHz	$\pm 0.75 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.45 \text{ dB}$	N/A	N/A	N/A	N/A
730 MHz to 1.31 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.45 \text{ dB}$	N/A	N/A	N/A	N/A
1.31 to 1.62 GHz	$\pm 0.75 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 1.10 \text{ dB}$, $\pm 0.75 \text{ dB}$	$\pm 1.25 \text{ dB}$, $\pm 0.90 \text{ dB}$	N/A	N/A
1.62 to 2 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.20 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.45 \text{ dB}$	N/A	N/A
2 to 3.5 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.85 \text{ dB}$, $\pm 0.55 \text{ dB}$
3.5 to 4.3 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.90 \text{ dB}$, $\pm 0.60 \text{ dB}$	$\pm 1.25 \text{ dB}$, $\pm 0.85 \text{ dB}$	$\pm 1.25 \text{ dB}$, $\pm 0.85 \text{ dB}$	$\pm 1.30 \text{ dB}$, $\pm 0.90 \text{ dB}$
4.3 to 6 GHz	$\pm 0.80 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.85 \text{ dB}$, $\pm 0.50 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 1.20 \text{ dB}$, $\pm 0.85 \text{ dB}$
6 to 9 GHz	$\pm 0.75 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.50 \text{ dB}$
9 to 10.2 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.20 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.85 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 1.30 \text{ dB}$, $\pm 0.75 \text{ dB}$
10.2 to 12.3 GHz	$\pm 0.80 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.85 \text{ dB}$, $\pm 0.50 \text{ dB}$	$\pm 0.90 \text{ dB}$, $\pm 0.60 \text{ dB}$	$\pm 0.90 \text{ dB}$, $\pm 0.60 \text{ dB}$	$\pm 0.90 \text{ dB}$, $\pm 0.60 \text{ dB}$

Half duplex port, Option HDX, $-20 \text{ dBm} \leq \text{Level} \leq +5 \text{ dBm}$, sample rate = $1.25 \times \text{bandwidth}$, typical indicated by *italics*

Center frequency	100 MHz BW	200 MHz BW	400 MHz BW	600 MHz BW	800 MHz BW	1.2 GHz BW
380 to 550 MHz	$\pm 0.70 \text{ dB}$, $\pm 0.35 \text{ dB}$	N/A	N/A	N/A	N/A	N/A
550 to 680 MHz	$\pm 0.60 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.40 \text{ dB}$	N/A	N/A	N/A	N/A
680 to 730 MHz	$\pm 0.60 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.40 \text{ dB}$	N/A	N/A	N/A	N/A
730 MHz to 1.31 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.50 \text{ dB}$	N/A	N/A	N/A	N/A
1.31 to 1.62 GHz	$\pm 0.70 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 1.00 \text{ dB}$, $\pm 0.70 \text{ dB}$	$\pm 1.15 \text{ dB}$, $\pm 0.85 \text{ dB}$	N/A	N/A
1.62 to 2 GHz	$\pm 0.60 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.25 \text{ dB}$	$\pm 0.60 \text{ dB}$, $\pm 0.20 \text{ dB}$	$\pm 0.50 \text{ dB}$, $\pm 0.35 \text{ dB}$	N/A	N/A
2 to 3.5 GHz	$\pm 0.60 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.45 \text{ dB}$
3.5 to 4.3 GHz	$\pm 0.60 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.50 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$
4.3 to 6 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.85 \text{ dB}$, $\pm 0.50 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 1.10 \text{ dB}$, $\pm 0.85 \text{ dB}$
6 to 9 GHz	$\pm 0.65 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.35 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.40 \text{ dB}$	$\pm 0.70 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.50 \text{ dB}$
9 to 10.2 GHz	$\pm 0.55 \text{ dB}$, $\pm 0.20 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.65 \text{ dB}$	$\pm 1.00 \text{ dB}$, $\pm 0.75 \text{ dB}$	$\pm 1.15 \text{ dB}$, $\pm 0.75 \text{ dB}$
10.2 to 12.3 GHz	$\pm 0.55 \text{ dB}$, $\pm 0.20 \text{ dB}$	$\pm 0.65 \text{ dB}$, $\pm 0.30 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.45 \text{ dB}$	$\pm 0.75 \text{ dB}$, $\pm 0.50 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.55 \text{ dB}$	$\pm 0.80 \text{ dB}$, $\pm 0.50 \text{ dB}$

Front Panel

Reference

Ref In, Ref Out	Frequency: 100 MHz
	Connector: MMPX female, 50 Ω nominal
	Lock range: $\pm 1 \text{ ppm}$, nominal
	Input amplitude: $>+10 \text{ dBm}$, nominal
	Output amplitude: $>+10 \text{ dBm}$, nominal

LO reference

2.4 GHz In, 2.4 GHz Out	Connector: MMPX female, 50 Ω nominal
	Input amplitude: $>+10 \text{ dBm}$, nominal
	Output amplitude: $>+12 \text{ dBm}$, nominal

RF connections

RF Input	Connector: 3.5 mm female, 50 Ω nominal
RF Output	Connector: 3.5 mm female, 50 Ω nominal
Half Duplex	Connector: 3.5 mm female, 50 Ω nominal

Trigger connections

Trigger 1, Trigger 2 (Input/Output, selectable)	Connector: MMPX female
	Input impedance: 1 k Ω or 50 Ω nominal
	Input level range: 0 to +3.3 V
	Output impedance: 50 Ω nominal
	Output level range: 3.3 V LVTTTL

DIO connections

Ctrl M, Ctrl S	Connector: Micro-HDMI female
	Level range: 3.3 V LVTTTL, LVDS

General Specifications

Environmental characteristics

Operating temperature	0 to +45 °C
Storage temperature	–40 to +65 °C
EMC	Complies with European EMC Directive 2014/30/EU • IEC/EN 61326-1 • CISPR 11, Group 1, Class A • AS/NZS CISPR 11 • ICES/NMB-001 This ISM device complies with Canadian ICES-001 Cet appareil ISM est conforme à la norme NMB-001 du Canada
Environmental stress	Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MILPRF-28800F Class 3.

Maximum power consumption

M9416A	152 W nominal
--------	---------------

Weight

Net	1.8 kg (4.0 lbs)
-----	------------------

Dimension

H x W x D	130.2 mm x 80.8 mm x 209.6 mm
-----------	-------------------------------

Warranty

The VXT PXIe vector transceiver is supplied with a 1-year warranty
--

Calibration cycle

The recommended calibration cycle is one year; calibration services are available through Keysight service centers
--

WLAN Measurement Application Key Specifications

Modulated power

Absolute power accuracy

802.11be, 2.4 to 7.1 GHz	± 0.4 dB nominal at 0 dBm input power
--------------------------	---------------------------------------

Error Vector Magnitude (EVM)

EVM floor conditions Phase Tracking on, Eq Smoothing on, Eq Training Seq only, RF output loopback to RF input, at –20 dBm input power, optimized range, nominal

802.11ac 5.8 GHz 80 MHz	< –51 dB
802.11ac 5.8 GHz 160 MHz	< –50 dB
802.11ax 5.8 GHz 80 MHz	< –52 dB
802.11ax 5.8 GHz 160 MHz	< –50 dB
802.11ax 7 GHz 80 MHz	< –51 dB
802.11ax 7 GHz 160 MHz	< –50 dB

EVM floor conditions Phase Tracking on, Eq Smoothing on, Eq Training Seq only, RF output loopback to RF input, at –15 dBm input power, optimized range, nominal

	rms-EVM	nc-EVM ¹
802.11be, 5 GHz, 160 MHz, 1024 QAM	< –50 dB	
802.11be, 5.8 GHz, 160 MHz, 1024 QAM	< –51 dB	
802.11be, 7 GHz, 160 MHz, 1024 QAM	< –50 dB	
802.11be, 5 GHz, 320 MHz, 4096 QAM	< –46 dB	< –51.9 dB
802.11be, 5.8 GHz, 320 MHz, 4096 QAM	< –47 dB	< –52.0 dB
802.11be, 7 GHz, 320 MHz, 4096 QAM	< –47 dB	< –51.9 dB

WLAN Source Key Specifications

Error Vector Magnitude (EVM)

RF output port, at –5 dBm to –15 dBm output power, nominal

802.11ac 5.8 GHz 80 MHz	< –51 dB
802.11ac 5.8 GHz 160 MHz	< –50 dB
802.11ax 5.8 GHz 80 MHz	< –52 dB
802.11ax 5.8 GHz 160 MHz	< –50 dB
802.11ax 7 GHz 80 MHz	< –51 dB
802.11ax 7 GHz 160 MHz	< –49 dB

EVM floor conditions Phase Tracking on, Eq Smoothing on, Eq Training Seq only, RF output loopback to RF input, at –15 dBm input power, optimized range, nominal

	rms-EVM	nc-EVM
802.11be, 5 GHz, 160 MHz, 1024 QAM	< –50 dB	
802.11be, 5.8 GHz, 160 MHz, 1024 QAM	< –51 dB	
802.11be, 7 GHz, 160 MHz, 1024 QAM	< –50 dB	
802.11be, 5 GHz, 320 MHz, 4096 QAM	< –46 dB	< –51.9 dB
802.11be, 5.8 GHz, 320 MHz, 4096 QAM	< –47 dB	< –52.0 dB
802.11be, 7 GHz, 320 MHz, 4096 QAM	< –47 dB	< –51.9 dB

1. nc-EVM: noise corrected EVM, is a technique to improve EVM by compensating analyzer's noise in EVM domain.

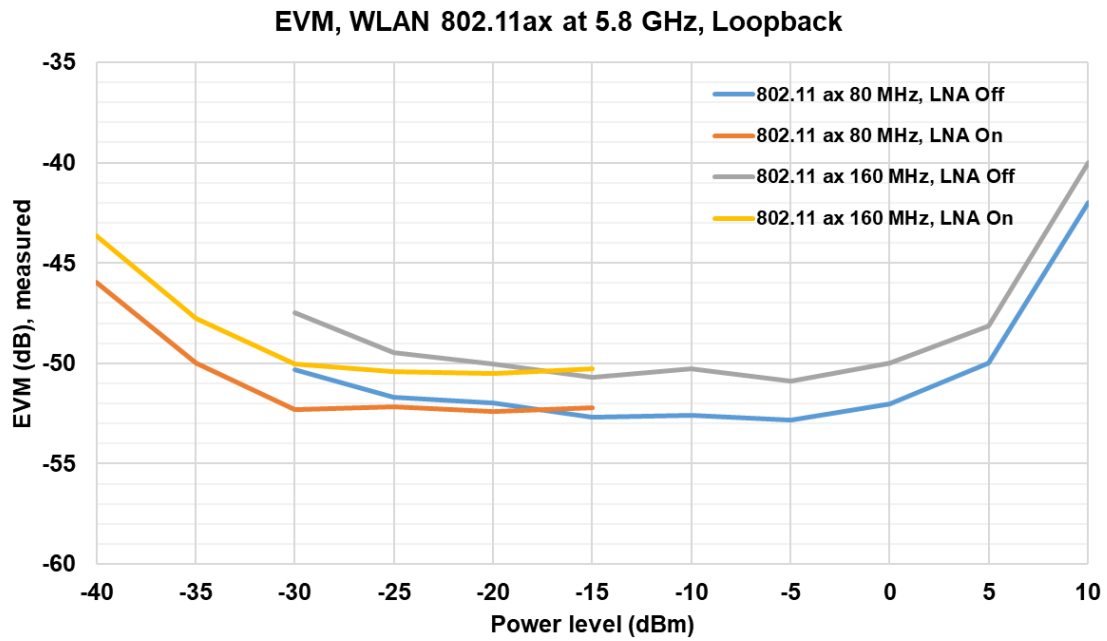


Figure 4. WLAN 802.11ax EVM vs. output power level at 5.8 GHz, loopback

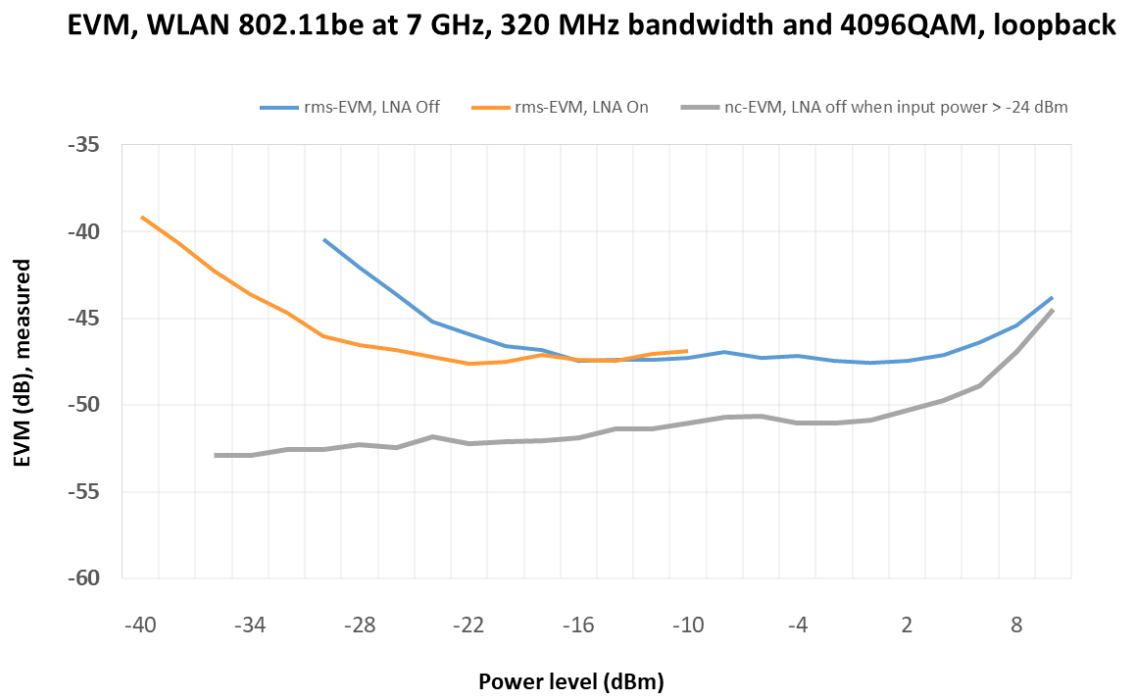


Figure 5. WLAN 802.11be EVM vs. output power level at 7 GHz, loopback

5G NR Measurement Application Key Specifications

Transmit power

Absolute power accuracy	± 0.35 dB nominal at 0 dBm input power
-------------------------	--

Error Vector Magnitude (EVM)

Residual EVM, at -10 dBm or 0 dBm input power

30 kHz SCS, 4 GHz, 100 MHz (256QAM)	0.33%
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	0.38%
30 kHz SCS, 7 GHz, 100 MHz (256QAM)	0.46%
30 kHz SCS, 12 GHz, 100 MHz (256QAM)	0.42%

Residual EVM, RF output loopback to RF input, at -5 dBm input power

120 kHz SCS, 4 GHz, 200 MHz (256QAM)	0.28% nominal
120 kHz SCS, 5 GHz, 200 MHz (256QAM)	0.36% nominal
120 kHz SCS, 7 GHz, 200 MHz (256QAM)	0.35% nominal
120 kHz SCS, 12.3 GHz, 200 MHz (256QAM)	0.41% nominal

Residual EVM, RF output loopback to RF input, at -5 dBm input power

120 kHz SCS, 4 GHz, 400 MHz (256QAM)	0.42% nominal
120 kHz SCS, 5 GHz, 400 MHz (256QAM)	0.50% nominal
120 kHz SCS, 7 GHz, 400 MHz (256QAM)	0.43% nominal
120 kHz SCS, 11 GHz, 400 MHz (256QAM)	0.50% nominal
120 kHz SCS, 7 GHz, 100 MHz 8CC (256QAM)	0.65% nominal
120 kHz SCS, 12.3 GHz, 100 MHz 8CC (256QAM)	0.74% nominal

Adjacent channel power

RF input port, at -10 dBm or 0 dBm input power, LNA off, noise correction on

30 kHz SCS, 4 GHz, 100 MHz (256QAM)	-66 dBc typical
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	-66 dBc typical

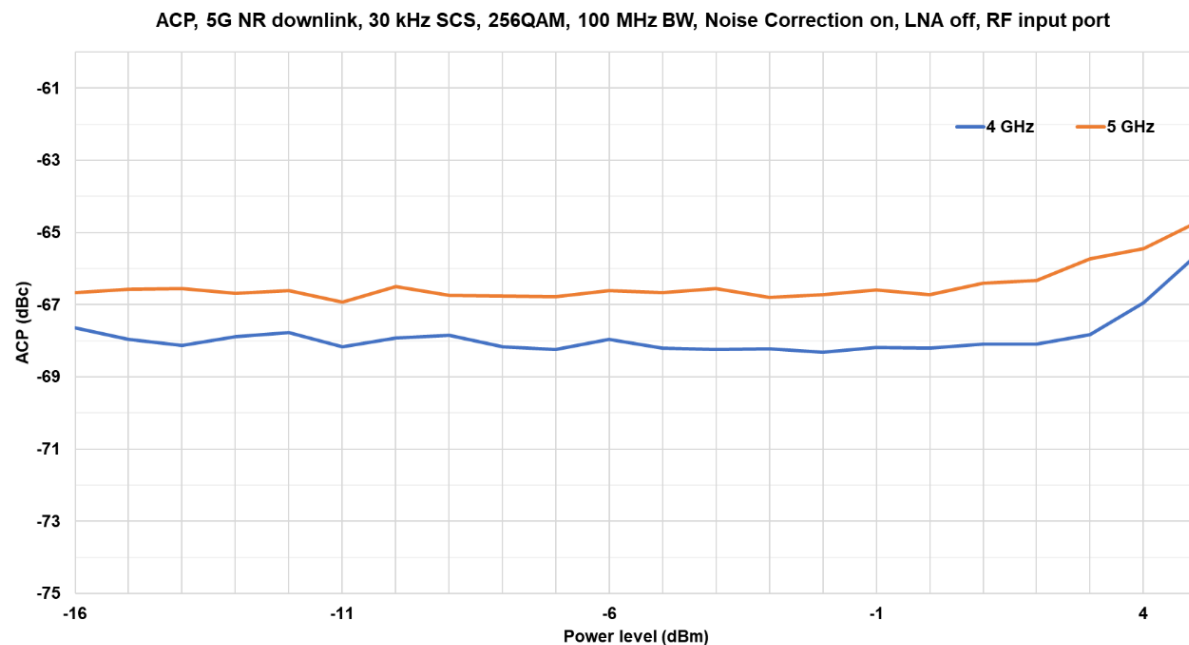


Figure 6. 5G NR downlink ACP vs. input power level at RF input port, LNA off

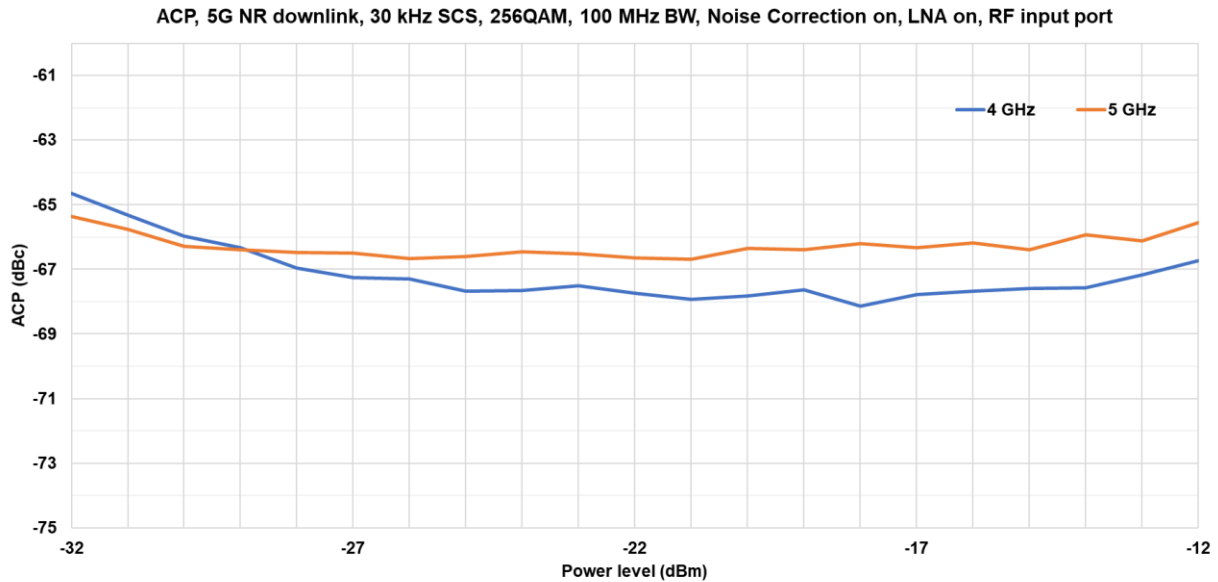


Figure 7. 5G NR downlink ACP vs. input power level at RF input port, LNA on

5G NR Source Key Specifications

Modulation signal level accuracy

600 MHz to 12.3 GHz	± 0.45 dB
---------------------	---------------

Error Vector Magnitude (EVM)

Composite EVM, RF output port, half duplex port, at -10 dBm output power

30 kHz SCS, 4 GHz, 100 MHz (256QAM)	0.28%, 0.24% typical
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	0.28%, 0.26% typical
30 kHz SCS, 7 GHz, 100 MHz (256QAM)	0.30%, 0.27% typical
30 kHz SCS, 12 GHz, 100 MHz (256QAM)	0.40%, 0.35% typical

Composite EVM, RF output port, at 0 dBm output power

30 kHz SCS, 4 GHz, 100 MHz (256QAM)	0.33%, 0.28% typical
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	0.33%, 0.29% typical
30 kHz SCS, 7 GHz, 100 MHz (256QAM)	0.33%, 0.29% typical
30 kHz SCS, 12 GHz, 100 MHz (256QAM)	0.67%, 0.56% typical

Composite EVM, RF output port loopback to RF input, at -5 dBm output power

120 kHz SCS, 4 GHz, 200 MHz (256QAM)	0.28% nominal
120 kHz SCS, 5 GHz, 200 MHz (256QAM)	0.36% nominal
120 kHz SCS, 7 GHz, 200 MHz (256QAM)	0.35% nominal
120 kHz SCS, 12.3 GHz, 200 MHz (256QAM)	0.41% nominal

Composite EVM, RF output port loopback to RF input, at -10 dBm output power

120 kHz SCS, 4 GHz, 400 MHz (256QAM)	0.42% nominal
120 kHz SCS, 5 GHz, 400 MHz (256QAM)	0.50% nominal
120 kHz SCS, 7 GHz, 400 MHz (256QAM)	0.43% nominal
120 kHz SCS, 11 GHz, 400 MHz (256QAM)	0.50% nominal
120 kHz SCS, 7 GHz, 100 MHz 8CC (256QAM)	0.65% nominal
120 kHz SCS, 12.3 GHz, 100 MHz 8CC (256QAM)	0.74% nominal

Adjacent channel power

RF output port, at -10 dBm output power	
30 kHz SCS, 4 GHz, 100 MHz (256QAM)	-59.5 dBc, -60.5 dBc typical
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	-55.0 dBc, -56.0 dBc typical
30 kHz SCS, 7 GHz, 100 MHz (256QAM)	-57.0 dBc, -58.0 dBc typical
30 kHz SCS, 12 GHz, 100 MHz (256QAM)	-53.0 dBc, -55.5 dBc typical
RF output port, at 0 dBm output power	
30 kHz SCS, 4 GHz, 100 MHz (256QAM)	0.33%, 0.28% typical
30 kHz SCS, 5 GHz, 100 MHz (256QAM)	0.33%, 0.29% typical
30 kHz SCS, 7 GHz, 100 MHz (256QAM)	0.33%, 0.29% typical
30 kHz SCS, 12 GHz, 100 MHz (256QAM)	0.67%, 0.56% typical
RF output port, at -10 dBm output power	
120 kHz SCS, 4 GHz, 200 MHz (256QAM)	-58.0 dBc nominal
120 kHz SCS, 5 GHz, 200 MHz (256QAM)	-54.0 dBc nominal
120 kHz SCS, 7 GHz, 200 MHz (256QAM)	-56.5 dBc nominal
120 kHz SCS, 11 GHz, 200 MHz (256QAM)	-54.5 dBc nominal
120 kHz SCS, 4 GHz, 400 MHz (256QAM)	-54.0 dBc nominal
120 kHz SCS, 5 GHz, 400 MHz (256QAM)	-51.0 dBc nominal
120 kHz SCS, 7 GHz, 400 MHz (256QAM)	-52.0 dBc nominal
120 kHz SCS, 11 GHz, 400 MHz (256QAM)	-52.0 dBc nominal
120 kHz SCS, 7 GHz, 100 MHz 8CC (256QAM)	-50.5 dBc nominal
120 kHz SCS, 11 GHz, 100 MHz 8CC (256QAM)	-49.0 dBc nominal

ACP, 5G NR downlink, 30 kHz SCS, 256QAM, 100 MHz BW, RF output port

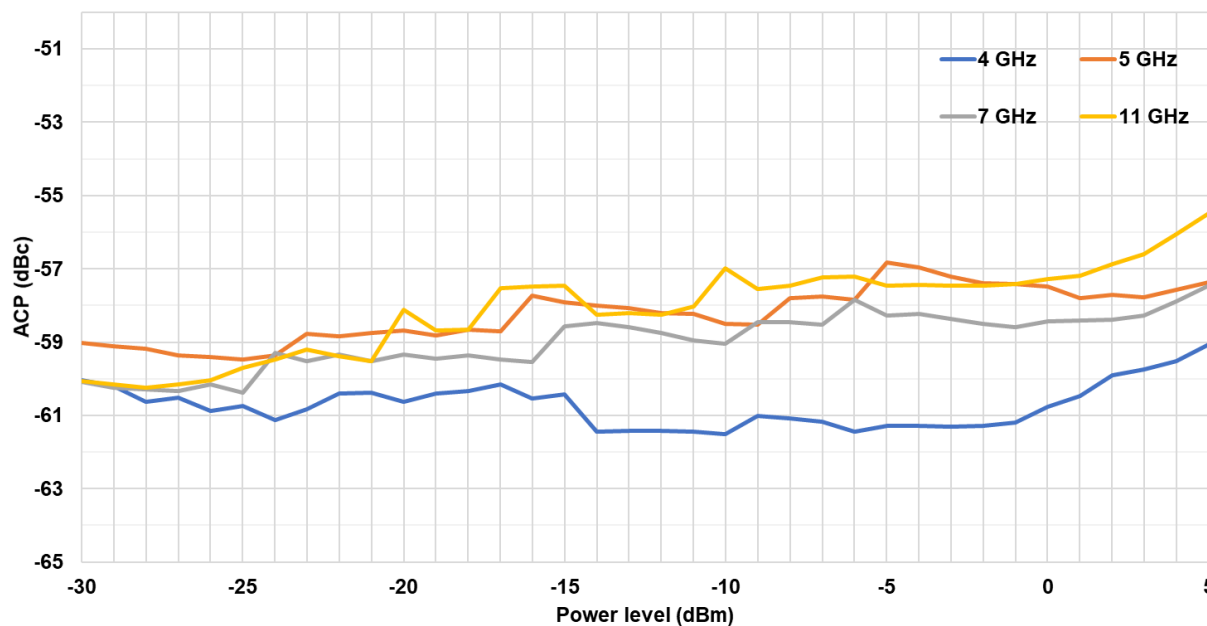


Figure 8. 5G NR downlink ACP vs. output power level, 100 MHz bandwidth, 30 kHz SCS, 256 QAM

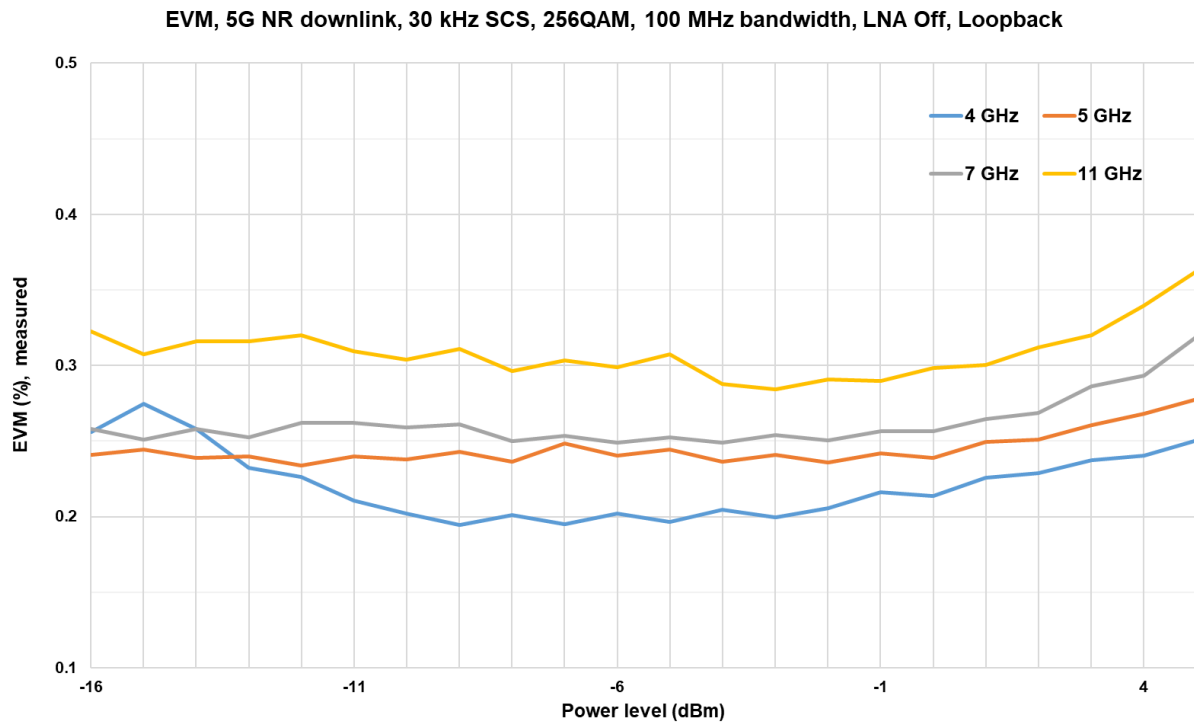


Figure 9. 5G NR downlink EVM vs. output power level, LNA off, loopback, with 100 MHz bandwidth, 30 kHz SCS, 256 QAM

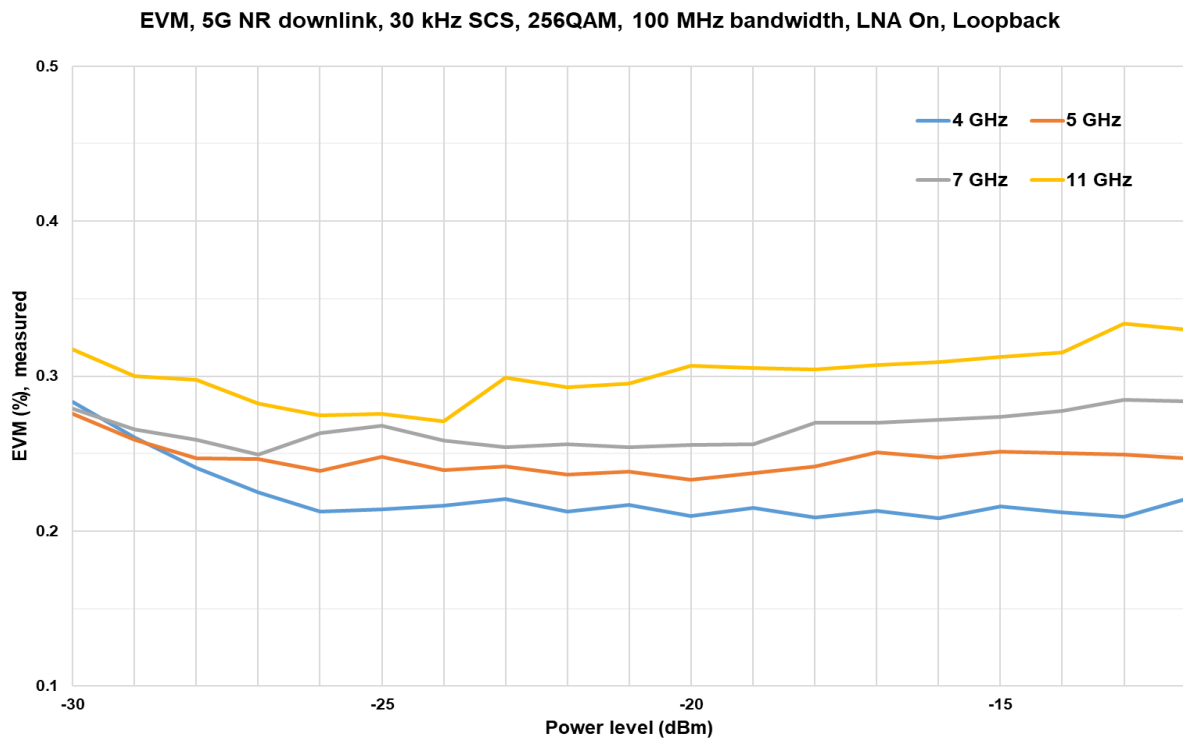


Figure 10. 5G NR downlink EVM vs. output power level, LNA on, loopback, with 100 MHz bandwidth, 30 kHz SCS, 256 QAM

LTE/LTE-Advanced FDD & LTE/LTE-Advanced TDD Measurement Application Key Specifications ¹

Error Vector Magnitude (EVM)

Residual EVM, at -10 dBm or 0 dBm input power		
900 MHz	5 MHz bandwidth	0.21% downlink, 0.19% uplink
	20 MHz bandwidth	0.24% downlink, 0.26% uplink
2000 MHz	5 MHz bandwidth	0.21% downlink, 0.22% uplink
	20 MHz bandwidth	0.29% downlink, 0.26% uplink

1. For frequencies from 695 to 3800 MHz

Adjacent channel power

RF input port; Half duplex port (option HDX); at -10 dBm or 0 dBm input power				
FDD	E-UTRA (Uplink and Downlink)	900 MHz	5 MHz bandwidth	-63 dBc typical
		2000 MHz	20 MHz bandwidth	
FDD	UTRA (Uplink and Downlink)	900 MHz	5 MHz bandwidth	-69 dBc typical
		2000 MHz	20 MHz bandwidth	
TDD	E-UTRA (Uplink and Downlink)	900 MHz	5 MHz bandwidth	-62 dBc typical
		2000 MHz	20 MHz bandwidth	
TDD	UTRA (Uplink and Downlink)	900 MHz	5 MHz bandwidth	-68 dBc typical
		2000 MHz	20 MHz bandwidth	

LTE Source Key Specifications

Modulated signal level accuracy

410 MHz to 3.3 GHz	± 0.51 dB
3.3 to 5.8 GHz	± 0.66 dB

Error Vector Magnitude (EVM)

Residual EVM, at -10 dBm or 0 dBm output power			
FDD	900 MHz	5 MHz bandwidth	< 0.24%
		20 MHz bandwidth	< 0.35%
	2000 MHz	5 MHz bandwidth	< 0.28%
		20 MHz bandwidth	< 0.39%
TDD	900 MHz	5 MHz bandwidth	< 0.32%
		20 MHz bandwidth	< 0.29%
	2000 MHz	5 MHz bandwidth	< 0.35%
		20 MHz bandwidth	< 0.34%

Adjacent channel power

RF input port; Half duplex port (option HDX); at -10 dBm output power			Adjacent	Alternate
FDD	900 MHz	5 MHz bandwidth	-67 dBc	-69 dBc
		20 MHz bandwidth	-62 dBc	-63 dBc
	2000 MHz	900 MHz	-66 dBc	-70 dBc
		2000 MHz	-65 dBc	-66 dBc
TDD	900 MHz	5 MHz bandwidth	-66 dBc	-68 dBc
		20 MHz bandwidth	-62 dBc	-63 dBc
	2000 MHz	900 MHz	-65 dBc	-69 dBc
		2000 MHz	-64 dBc	-66 dBc
RF input port; Half duplex port (option HDX); at -0 dBm output power			Adjacent	Alternate
FDD	900 MHz	5 MHz bandwidth	-64 dBc	-68 dBc
		20 MHz bandwidth	-62 dBc	-62 dBc
	2000 MHz	5 MHz bandwidth	-63 dBc	-70 dBc
		20 MHz bandwidth	-62 dBc	-66 dBc
TDD	900 MHz	5 MHz bandwidth	-63 dBc	-68 dBc
		20 MHz bandwidth	-62 dBc	-63 dBc
	2000 MHz	5 MHz bandwidth	-62 dBc	-70 dBc
		20 MHz bandwidth	-62 dBc	-66 dBc

W-CDMA/HSPA+ Measurement Application Key Specifications ²

Channel power

Absolute power accuracy	±0.1 dB nominal at 0 dBm input power
-------------------------	--------------------------------------

QPSK EVM

Residual EVM	0.7% nominal at -10 dBm input power
--------------	-------------------------------------

Adjacent Channel Power Ratio (ACPR)

Residual relative power in 3.84 MHz BW

5 MHz offset	-66 dBc nominal at 0 dBm input power
--------------	--------------------------------------

Spectrum Emission Mask (SEM)

Residual relative power (offset), at 0 dBm input power

Downlink

2.515 to 2.715 MHz	-83 dBc nominal in a 30 kHz BW
2.715 to 3.515 MHz	-85 dBc nominal in a 1 MHz BW
3.515 to 4 MHz	-85 dBc nominal in a 1 MHz BW
4 to 8 MHz	-71 dBc nominal in a 1 MHz BW
8 to 12.5 MHz	-72 dBc nominal in a 1 MHz BW

Uplink

2.515 to 3.485 MHz	-84 dBc nominal in a 30 kHz BW
4 to 7.5 MHz	-72 dBc nominal in a 1 MHz BW
7.5 to 8.5 MHz	-73 dBc nominal in a 1 MHz BW
8.5 to 12 MHz	-73 dBc nominal in a 1 MHz BW

W-CDMA/HSPA+ Source Key Specifications

Error Vector Magnitude (EVM) ²

Composite EVM, RF output port, half duplex port, at 0 dBm output power

RMS	< 0.6% nominal
-----	----------------

Adjacent Channel Leakage Ratio (ACLR), RF output port, half duplex port, at 0 dBm output power

Offset	Configuration	Frequency (MHz)	ACLR
Adjacent 5 MHz	1 DPCH 1 carrier	900	-66 dB nominal
Adjacent 10 MHz			-69 dB nominal
Adjacent 5 MHz		1800 to 2000	-65 dB nominal
Adjacent 10 MHz			-71 dB nominal
Adjacent 5 MHz	64 DPCH 1 carrier	900	-67 dB nominal
Adjacent 10 MHz			-69 dB nominal
Adjacent 5 MHz		1800 to 2000	-66 dB nominal
Adjacent 10 MHz			-72 dB nominal

2. For frequencies from 730 to 2650 MHz

Related Literature

For more detailed product and specification information refer to the following literature and web pages:

- M9416A VXT PXIe Vector Transceiver Configuration Guide (literature no. 3122-2155.EN)
- M9300A PXIe Frequency Reference Data Sheet (literature no. 5991-0898EN)
- M9018B and M9019A PXIe 18 slot Chassis Data Sheet (literature no. 5992-1481EN)
- M9038A PXIe Embedded Controller Data Sheet (literature no. 3122-1717.EN)
- X-Series Measurement Applications Brochure (literature no. 5989-8019EN)
- Signal Studio Software Brochure (literature no. 5989-6448EN)

Web

Product page:

- www.keysight.com/find/M9416A