WP284ADMP

WR284 Waveguide Pressure Window with UDR32 and PDR32 Flanges

Rev 1

Electrical

Frequency Range	2.6-3.95 GHz
VSWR	1.2 max
Insertion Loss	0.2 dB max
Input Average Power	2000 Watts max @ 25℃

Mechanical

Waveguide Size	WR 284	
Flange Type	UDR32 Cover Flange	PDR32 Grooved Flange
Pressure	0.2 MPa (29 PSI) Max	
Window Material	Ceramic	
Body Material, Finish	Aluminum, conductive oxidation	
Coat*	By default, no painting, painting available upon request	

*For vacuum use, no painting is recommended. Change the P/N to WP284ADMP-P when painting is needed.
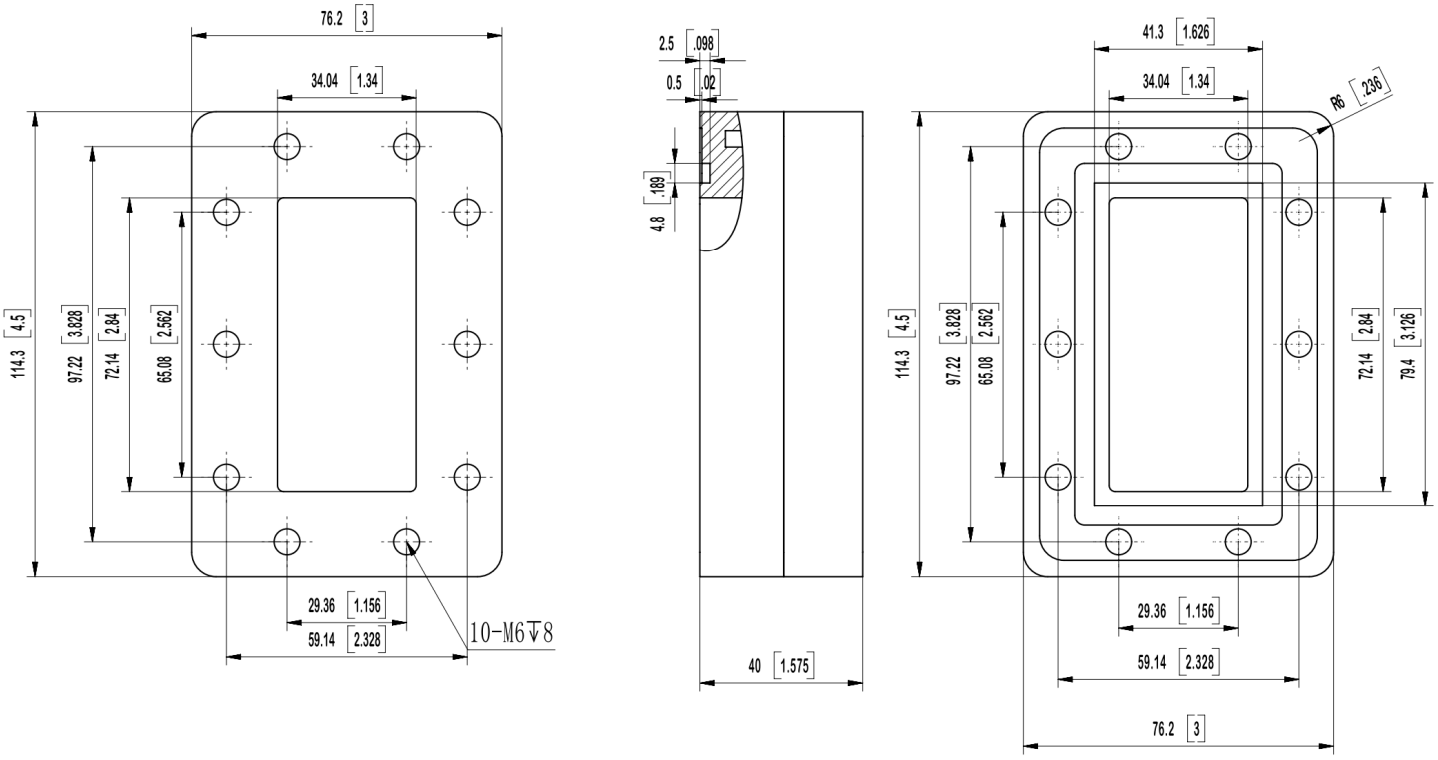
Dimensions mm [inch]