FPAS-1000-26500-20-18

1~26.5GHz, 20dB, 18dBm

Features:
* Small Size
* Low Power Consumption

Applications:
* Wireless
* Transmitter
* Laboratory Test

Electrical

Frequency:	1~26.5GHz
Gain:	20dB min.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	18dBm min.
Noise Figure:	10dB typ.
Spurious:	-60dBc max.
VSWR:	2 typ.
	2.6 max.
Voltage:	220V AC
Input Power:	+18dBm max.
Impedance:	50Ω

Environmental

Operating Temperature:	-20~+50℃
Non-operating Temperature:	-40~+85℃

Mechanical

Size[*1]:	166*106.4*56.4mm
	6.535*4.189*2.22in
Weight:	1Kg max.
RF Connectors:	SMA Female or 2.92mm Female


[1] Exclude connectors, rack mount brackets, handles.

How To Order

FPAS-1000-26500-20-18

Customization is available upon request.

Outline Drawings

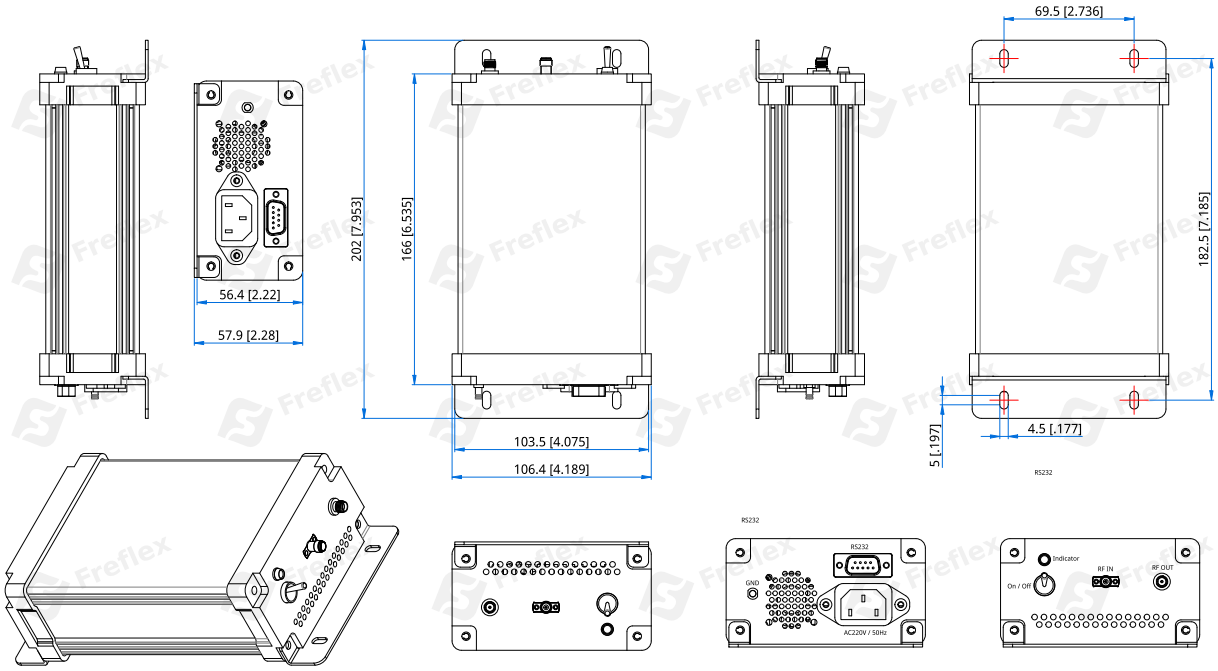

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]