




**Electrical**

|                       |             |
|-----------------------|-------------|
| Frequency Range       | 26.5-40 GHz |
| VSWR                  | 1.2 max     |
| Attenuation           | 40 ± 1.5 dB |
| Input Avg Power       | 200 Watts   |
| Peak Power            | 2 kWatts    |
| Operating Temperature | -40°C~+85°C |

**Mechanical**

|                           |                         |
|---------------------------|-------------------------|
| Waveguide Size            | WR28(R320)              |
| Flange Type(Input&Output) | IEC: UBR320             |
| Material                  | Aluminum                |
| Internal Finish           | Conductive oxidation    |
| External Finish           | High temp black painted |
| Net Weight                | Approx 1060g            |

**Dimensions(mm)**

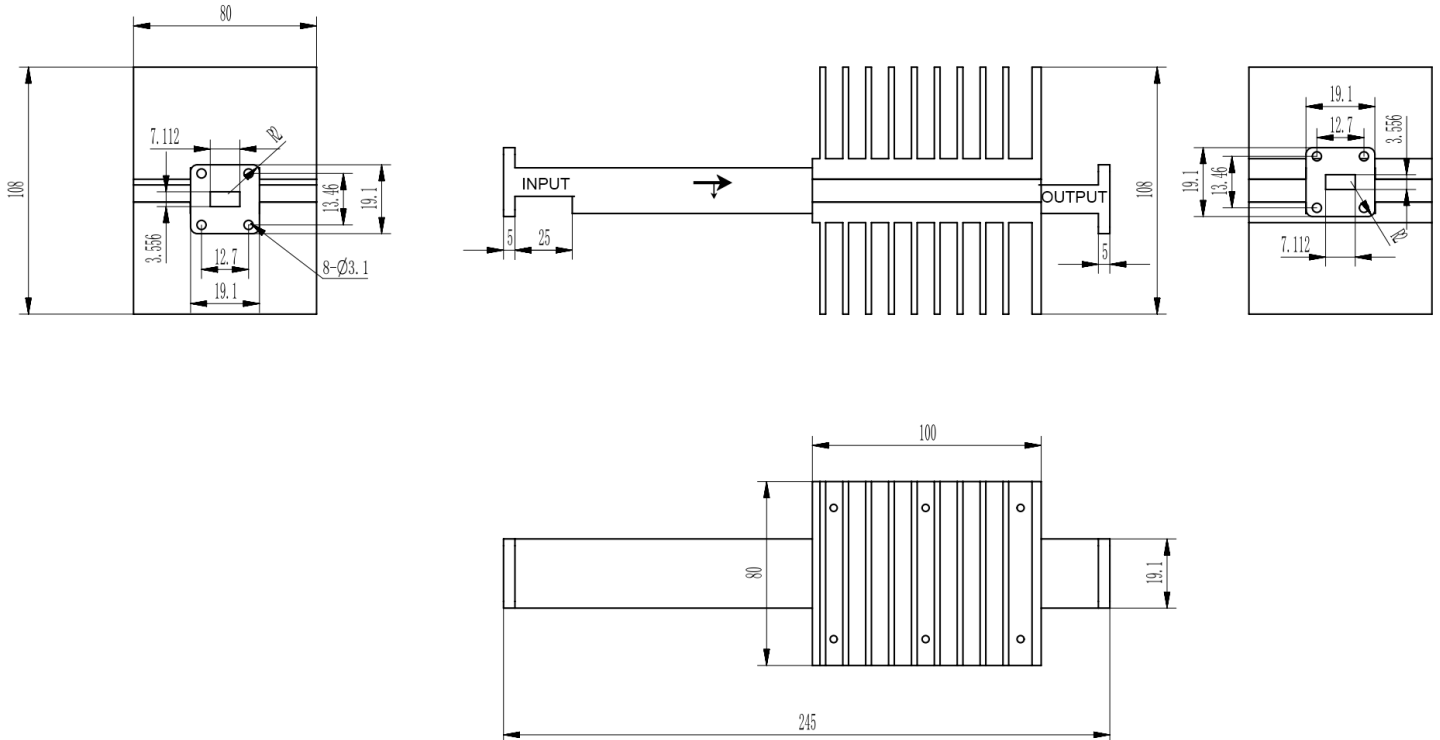



Typical Test Data

