



**Electrical**

Frequency Range	2-4.8 GHz
VSWR	1.25 max
Average Power	2000 Watts

**Configuration**

Waveguide Size	WRD200
Flange Type	Rectangular Cover, FPWRD200
Coax Connector	DIN 7/16 Female (Air dielectric)
Body Geometry	Right Angle




**Materials**

Waveguide Body	Aluminum, grey or black painted
Connector Body	Ternary Alloy plated brass
Center Contact	Silver plated beryllium copper

**Mechanical & Environmental**

Operating Temp	-40 °C to 70 °C
Connector Interface	MIL-STD-348
Net Weight	580g

**Dimensions(mm)**

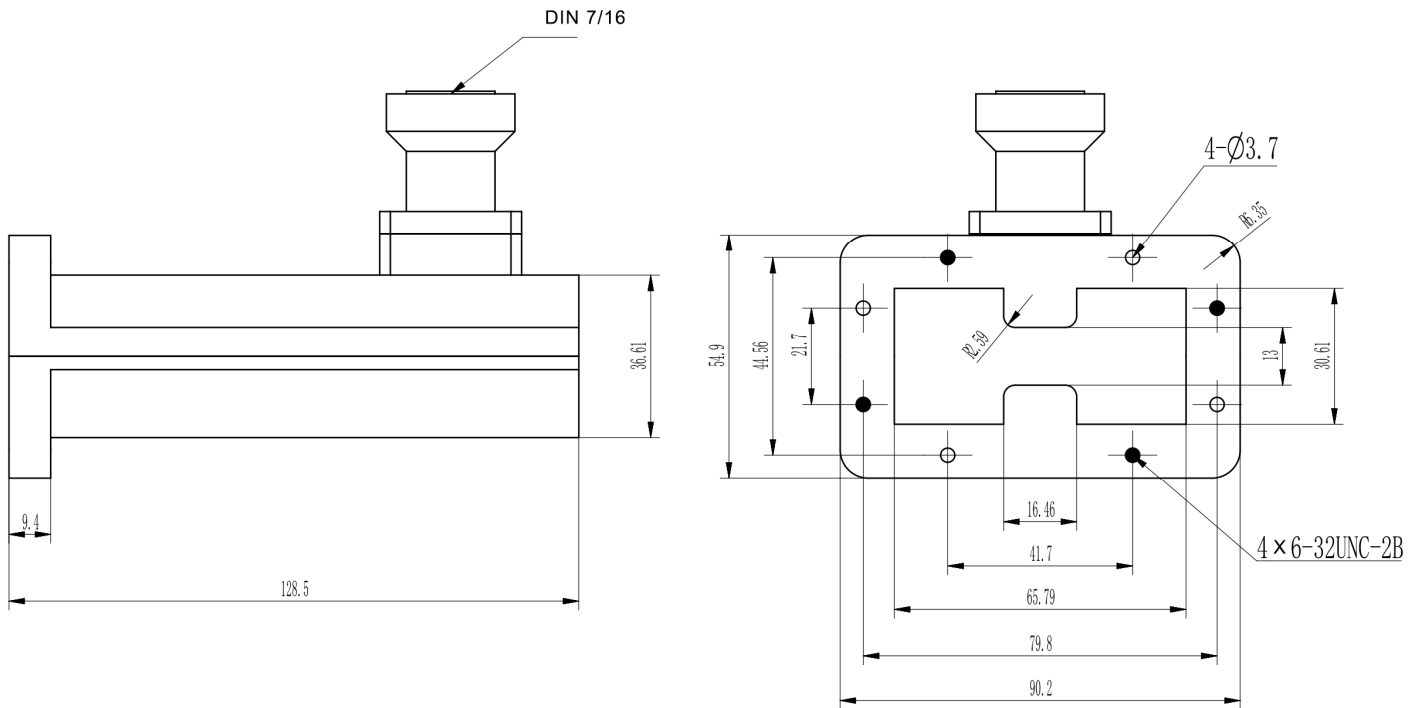



Typical Test Data

