

TECHNICAL DATASHEET

AVBR00810H49

The AVBR00810H49 is an 80W high gain Solid State Broadband High Power Amplifier. This amplifier module utilizes the latest high power RF LDMOS transistors and also features built in control and monitoring, with protection functions to ensure high availability. This amplifier is suitable for broadband jamming and EMC testing.

Features

- 80MHz-1000MHz frequency range
- Psat 49dBm type
- Power gain 50dB type
- 50 ohm input/output impedance
- Built-in control, monitoring and protection circuits
- Solid-state Class AB Broadband design
- Instantaneous ultra-broadband
- Suitable for AM, and FM
- High Linearity
- High reliability and ruggedness

ELECTRICAL SPECIFICATIONS(T=25°C,DC Voltage=28V, Load VSWR ≤1.2)

Description	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	80		1000	MHz
Output Power CW	Psat	70	80		W
Output Power CW@P1dB	P1dB	40	70		W
Power Gain@ Pin=0dBm	Gp	48	50		dB
Power Gain Flatness @ Pin=0dBm	ΔGp		±1.4	±1.8	dB
Input Power for Rated P _{SAT}	P _{IN}		0		dBm
Harmonics @ Pin=-4 dBm	2 nd /3 rd		-15/-15	-10/-10	dBc
Noise Figure	NF		12		dB
Spurious Signals@ Pin=0 dBm	Spur		-70	-60	dBc
Input Return Loss	S11			-10	dB
Operating Voltage	VDC	26	28	30	V
Current Consumption @ Pout=70~100W	IDD		8.5	10	A
Switching Time @ 1kHz TTL, PIN =0dBm	TON/TOFF		2	5	μs

MECHANICAL SPECIFICATIONS

- Cooling External Heat Sink Needed (Not Supplied)
- Length* Width*Height[mm] 150*90*25
- Weight[Kg] 0.6
- RF Connector Input SMA, Female
- RF Connector Output SMA, Female
- DC interface connector Hybrid D-Sub 7 Pin, Male

ENVIRONMENTAL SPECIFICATIONS (Design to Meet)

Module Operation Temperature* ¹	-20	65* ²	°C
Storage Temperature Range	-45	85	°C
Relative-Humidity		95	%
Altitude * ³	N/A		
Vibration/Shock * ³	N/A		

Notes *¹: Module Operation Temperature can be extended to -45~85°C, Contact Sales for update.

Notes *²: Should Supply Adequate Heat Dissipation, Enough Fan and Heat-Sink is necessary during the Temp Test.

Notes *³: Altitude /Vibration are designed with considerations, but without tests and experiments.

LIMITS

Input RF drive level without damage	$P_{in} \leq 10$	dBm
Load VSWR @ POUT =50W	$VSWR \leq 5:1$ [Design To Meet]	N/A
Load VSWR @ POUT =80W	$VSWR \leq 3:1$ [Design To Meet]	N/A
Thermal Degradation	Module Surface= $90 \pm 5^\circ C$ [recovery@ $80 \pm 5^\circ C$]	°C

DC INTERFACE CONNECTOR – [Hybrid D-Sub 7-Pin, Male]

Pin #	Description	Specifications
A1	GND	Ground
A2	VDD	28VDC
1	CURRENT SENSE	Analog voltage relative to IDD @ 100mV per Ampere
2	TEMP SENSE	Analog voltage relative to Module’s Temperature @ 10 mV/° C
3	ENABLE	Amplifier Disable: TTL Logic Low(0~0.6V), Amplifier Enable: TTL Logic High(3.3~5V)(Internally Pulled-Low)
4	GND	Ground
5	N/C	No Connection

Note*: Temp sense has a positive temperature coefficient of approximately 10mV/° C by design.

The Temp sense voltage can be calculated using the equation: $V_T(mV) = 500mV + 10mV * Temp$

PLOTTED AND OTHER DATA


Notes:

- 1、 Values at +25°C , sea level.
- 2、 ESD Sensitive Material, Transport material in Approved ESD bags. Handle only in approved ESD Workstation.
- 3、 Heat Sink required for Proper Operation, Unit is cooled by conduction to heat sink.


TECHNICAL DATASHEET **AVBR00810H49**

TYPICAL PERFORMANCE DATA[Volume Shipment product data for Reference] [DC Voltage= 28V,Load VSWR ≤


1.2,Ambient temp. +25±3°C]

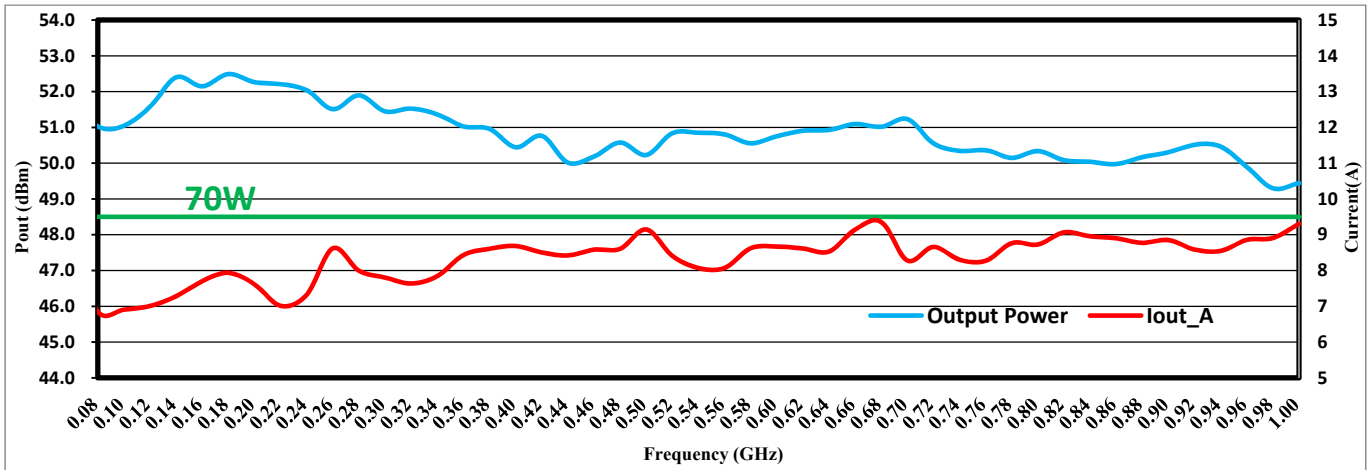

Output power & Iout@Pin=0 dBm


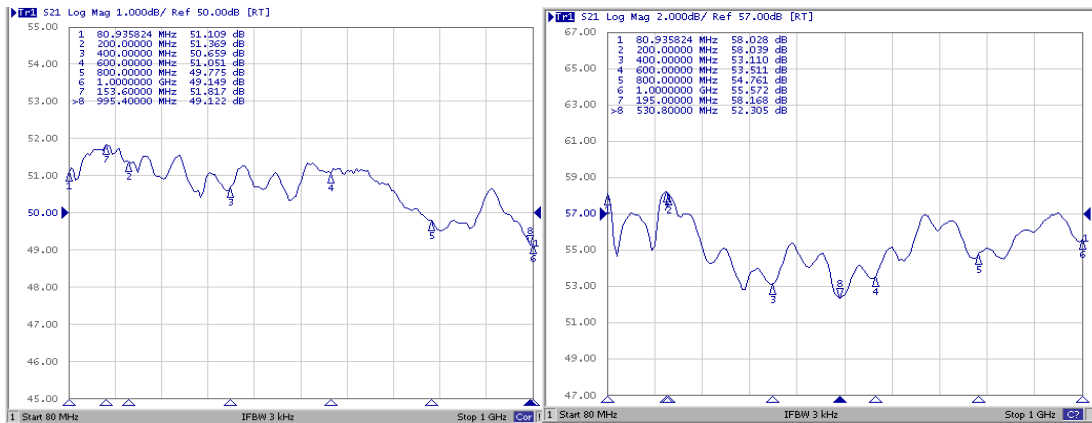


Graph left: Power Gain S21 @Pin=0 dBm, Graph right: Small signal Gain S21 @Pin=-30 dBm

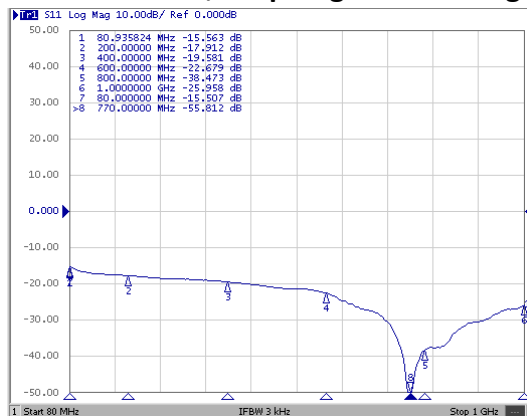

Input return loss: S11 @Pin=-30 dBm

OUTLINE DRAWING [mm]. Surface: Natural color conductive oxidation.

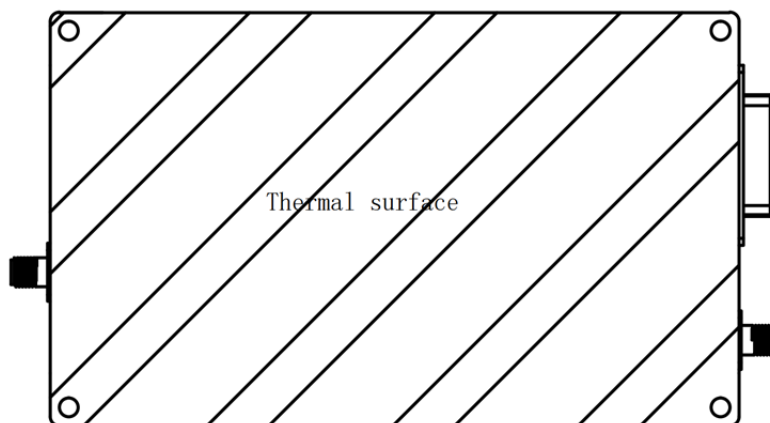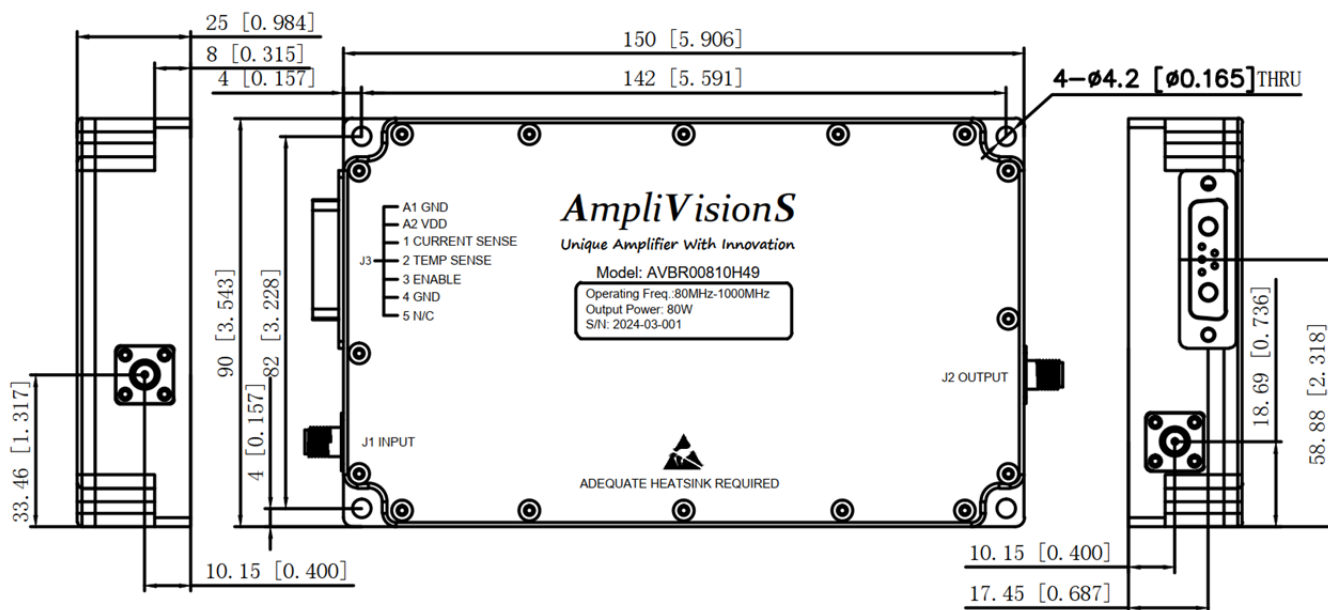

(Bottom view)

Unit: mm[inch]Tolerance: $\pm 0.2[0.008]$

Note*¹: The Outline and Functions can be customized, please contact our sales for further information.

Note*²: Thermal grease with a thermal conductivity of 3-6W/m-K is recommended. Accessory type AVS001 is recommended.

OUTLINE - Fabricated



Part Number	Version	Release Date	Modification	Status
AVBR00810H49	3.0	4.6.2020	Based on Product data	Product
AVBR00810H49	4.1	12.6.2023	Updated Electrical Specification Based on Product data, Add multi-product test data	Official release
AVBR00810H49	4.2	2.11.2025	1. Update product appearance (trademark); 2. Add bottom heat dissipation distribution diagram 3. Update product photos and data	Official release