


HY-GT Series

Gyroscope Test Power Source (Compass Power Supply)

Military Quality Power Supply Expert

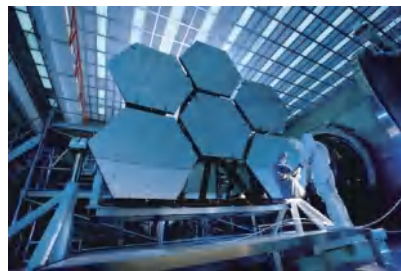

HY-GT Series Gyroscope Test Power Source (Compass Power Supply)

High purity, high precision, high reliability

Product Features

- Output frequency range 300Hz-1500Hz, optional 300Hz-5000Hz, set resolution 0.01Hz
- Output capacity range 100VA - 3000VA
- Output voltage AC 0-60Vrms, set resolution 0.01V
- Output phase difference dual phase 90 °/three-phase 120 °
- Output waveform sine wave, optional square wave output
- Linear power technology, low ripple noise, high stability, and no high-frequency interference
- Supports front panel programming without the need for upper computer software control
- Power output soft start function
- 16 bits D/A High precision converter with precise output
- 16 bits A/D High precision converter for more accurate read back
- Multiple protection functions OVP / OCP / OTP
- 19 Inch standard rack size or floor mounted cabinet
- 7-Inch large LCD display screen
- Touch screen operation&number key input
- Multistage shuttle adjustment knob
- Output ON/OFF button
- Intelligent speed control design for fans to reduce noise
- Front/side air inlet, rear air outlet, saving heat dissipation space
- Supports Modbus protocol
- Standard interface: RS-485&RS-232
- Purchasing interface: LAN&CAN
 - USB
 - GPIB
 - Analog programming and monitoring (isolated type)



Application Field

- ◆ Guidance system gyroscope testing
- ◆ Rotating transformer
- ◆ Gyro motor
- ◆ Scientific research




HY-GT Series Product Selection Table

In the selection table, special specifications beyond the voltage/frequency/output capacity range are accepted for customization

| HY-GT Series Gyroscope Test Power Source (Compass Power Supply) | | | | | | |
|---|-----------------------------------|-------|-------|-------|--------|--------|
| Frequency | 300-1500Hz (Optional: 300-5000Hz) | | | | | |
| Voltage | 0-30Vrms (Optional: 0-60Vrms) | | | | | |
| Wave form | Sine wave (A) , Square wave (B) | | | | | |
| Biphasic | 100VA | 200VA | 400VA | 600VA | 1000VA | 2000VA |
| Three-phase | 150VA | 300VA | 600VA | 900VA | 1500VA | 3000VA |

Product Model Naming Rules

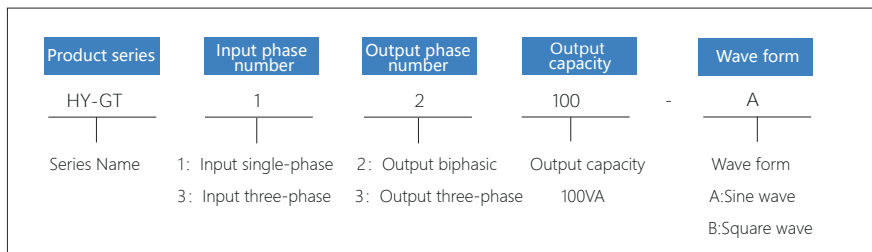

Selection examples:

Model: HY-GT 12100-A

Input single-phase, output two-phase, output capacity 100VA, sine wave.

| AC Output | |
|---------------------------|---|
| Connection | Input single-phase or three-phase four wire+ground wire |
| Frequency setting range | Standard: 300-500Hz, Optional: 300-5000Hz |
| Input adjustment rate | ≤0.5%F.S. |
| Load regulation | ≤0.5%F.S. |
| Waveform distortion (THD) | Sine wave, THD<0.6% (Test when the output is greater than 20% resistive load) |
| phase difference | Phase difference of 120 ° ± 2% (with adjustable phase difference function) |
| Output waveform | Sine wave, optional square wave |

| Programming And Read Back Accuracy & Resolution | |
|---|--|
| Voltage output programming accuracy | ≤0.5%F.S., Optional ≤0.1% |
| Frequency output programming accuracy | ±0.01%F.S. |
| Voltage setting resolution | 0.01V |
| Frequency setting resolution | 0.01Hz |
| Voltage output readback accuracy | ±0.5%F.S. |
| Current output readback accuracy | ±0.5%F.S. |
| Voltage read back resolution | 0.01V |
| Current read back resolution | 0.0001A (≤ 6A) ; 0.001A (≤ 60A) ; 0.01A (> 650A) ; 0.1A (> 650A) |

| Protection Function | |
|---------------------|--|
| Overload capacity | 300% Current immediately stops, 200% current 2s, 150% current 5s, 125% current 15s |
| Protection function | Overvoltage, overcurrent, internal overheating, short circuit |

| Ambient Condition | |
|---------------------------------|---|
| Environment | Indoor use; Installation overvoltage level: II; Pollution level: P2; Class II equipment |
| Ambient temperature | 0°C to 45°C; -20°C to 55°C; choose -40°C to 55°C |
| Storage environment temperature | -20°C to 65 °C |
| Working environment humidity | 20%-90%RH, No condensation, continuous operation |
| Storage environment humidity | 10%-95%RH, No condensation |
| Altitude | Above an altitude of 2000 meters, the power decreases by 2% for every 100 meters increase, or the maximum working environment temperature decreases by 1 °C for every 100 meters; When not in operation, it can reach an altitude of 12000 meters |
| Burial | Forced air cooling, intelligent variable speed fan, both sides/front air inlet, rear air outlet |
| Noise | ≤ 65dB(A), Weighted measurement using 1m |

HY-GT Series Ordering Information

| Control Panel | |
|-------------------------|--|
| Monitor | 7-Inch, LCD Display, touch screen |
| Display item | Line voltage/phase voltage (set value&measured value), current measurement value Frequency setting value, working time, cumulative working time, current time and date |
| Control function | Number button input, multi-level shuttle knob adjustment (outer circle coarse adjustment/ inner circle fine adjustment)Output ON/OFF switch, Lock keyboard and touch lock, Reset restart Status indicator light (Shift / Local / Remote / Alarm / Lock / Output) |
| Programming function | Step/ ladder /gradient |
| Communication Interface | |
| Standard configuration | RS-485 & RS-232 |
| Choose | LAN、CAN、USB、GPIB, Analog programming and monitoring interface (isolated type) |
| Appearance Color & Size | |
| Colour | RAL 7035 |
| Size | 4U, Standard 19 inch rack mounted or desktop (with fixed foot pads); 10U, Standard 19 inch rack mounted or floor mounted (with movable universal casters and brakes); 18UAnd above, floor mounted cabinet with movable universal casters and brakes. |

Purchasing Interface

- LAN LAN Communication interface
- CAN CAN Communication interface
- USB USB Communication interface
- GPIB GPIB Communication interface
- APM Analog programming and monitoring interface (isolated type)

Purchasing Function


- HR High resolution/precision
- T4 Operation temperature -40°C to 55°C
- T2 Operation temperature -20°C to 55°C
- CF User defined functions (please specify when ordering)
- MR Measurement report (issued by a third party certified by CNAS)

*The equipment operates continuously for more than 30 minutes at the specified operating temperature Only then can all technical indicators be guaranteed.


Introduction To Programmable Functions



Single phase power supply main interface

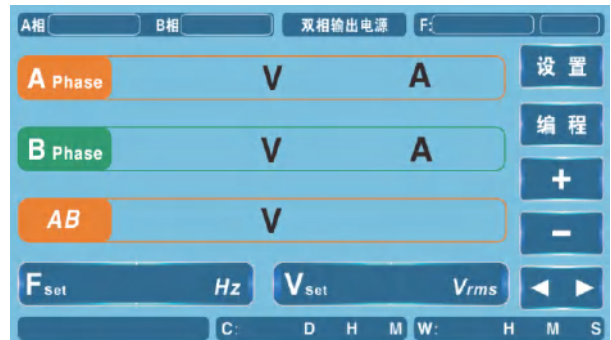

Dual phase power supply main interface

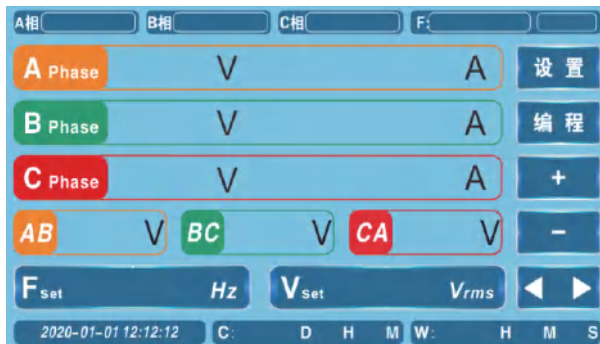

Main interface of three-phase power supply



The step setting page allows you to set the required frequency, voltage Run time, initial step, end step, and number of cycles




The ladder setting page can set the desired initial frequency, Step frequency, initial voltage, step voltage, number of steps, and Step time




The gradient settings page allows you to set the required voltage and frequency Run time, initial step, end step


Single Phase

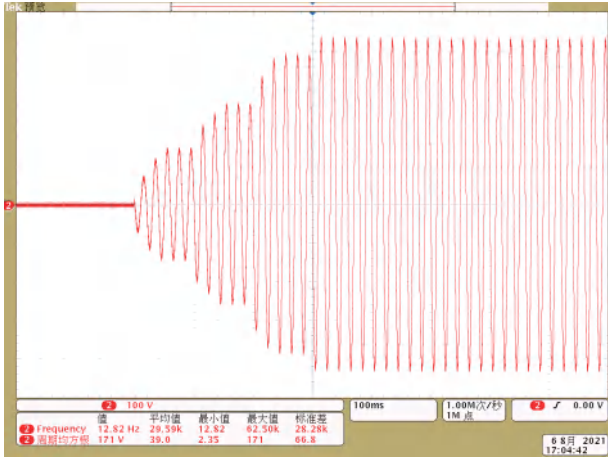


Step

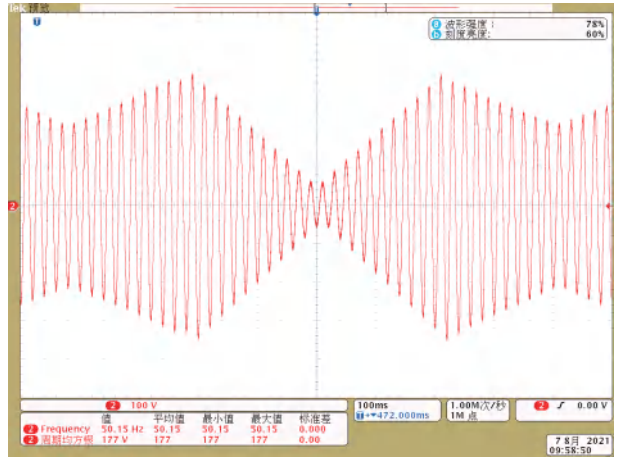

Step

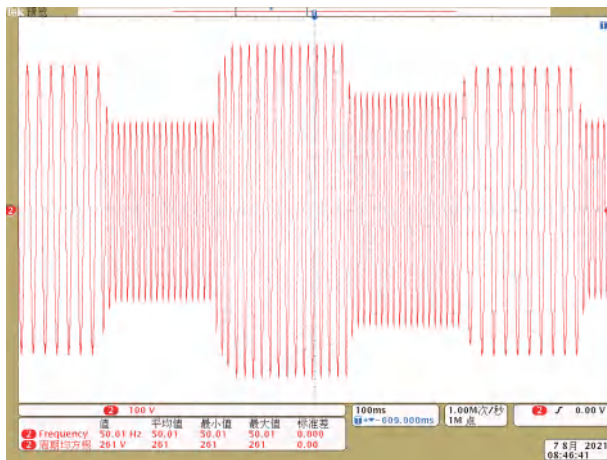


Ladder

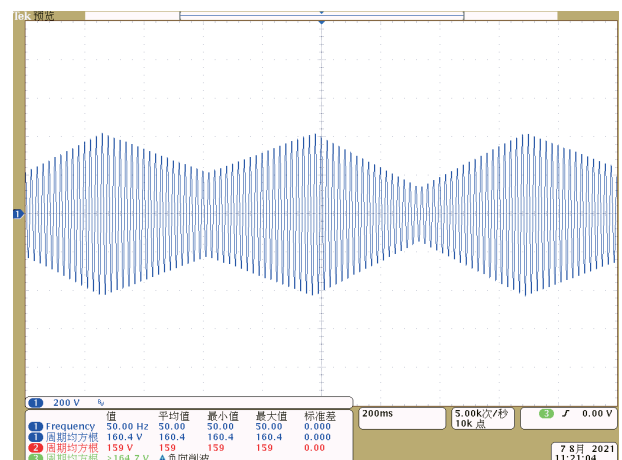


Ladder

Three-Phase

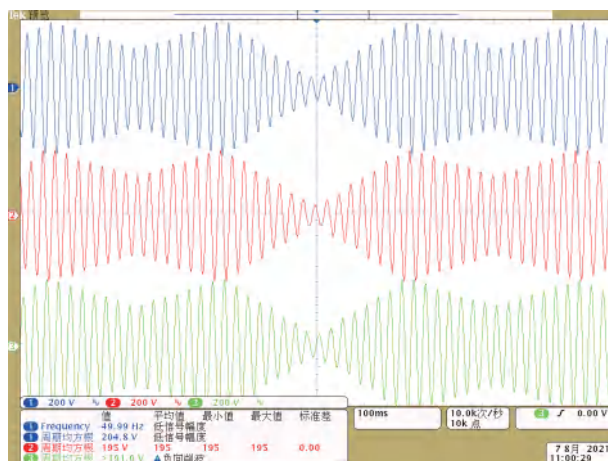


Three-phase step

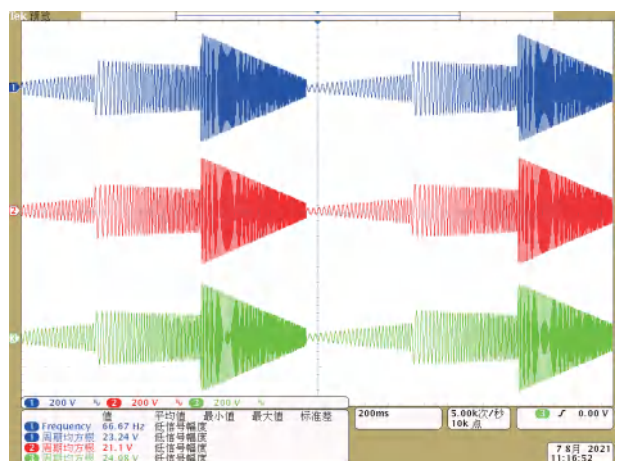


Three-phase gradient

Output Waveform

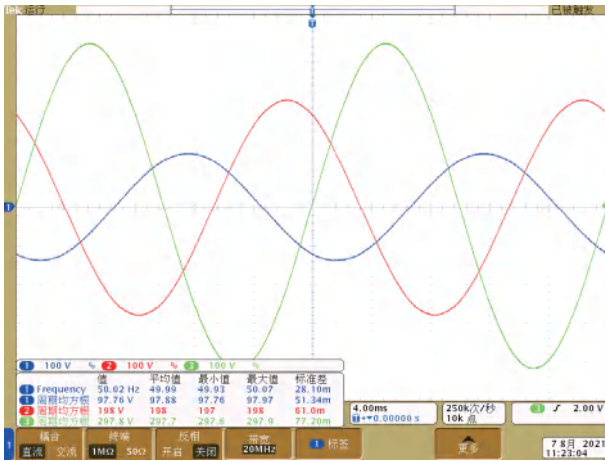


Unbalanced three-phase voltage

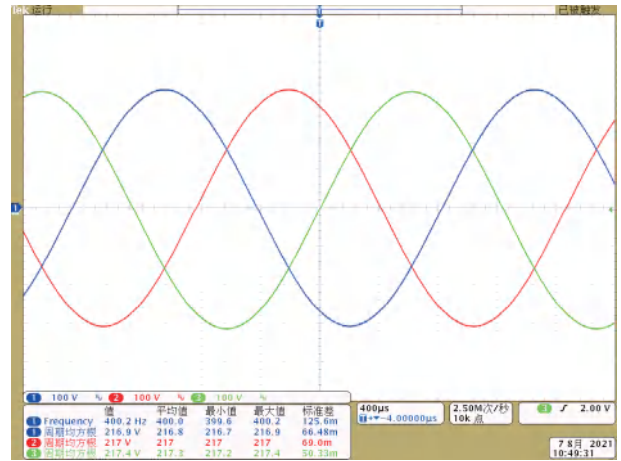



120 ° Three-phase phase difference

Appearance & Size Outline Dimension

4U 430(W)*560(D)*178(H)mm



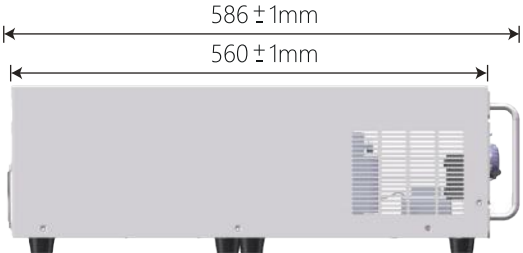


10U 440(W)*600(D)*445(H)mm

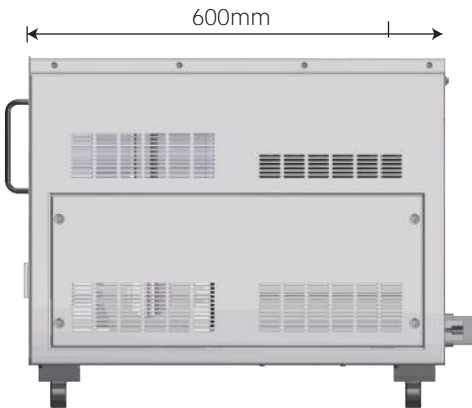
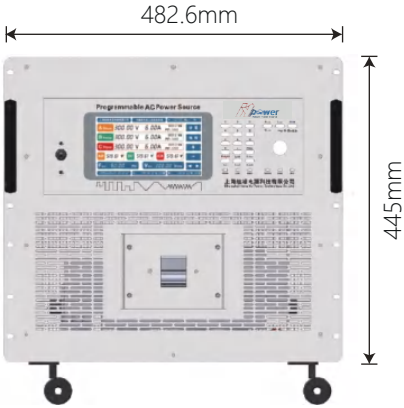


Appearance & Size Outline Dimension

18U 600(W)*800(D)*920(H)mm

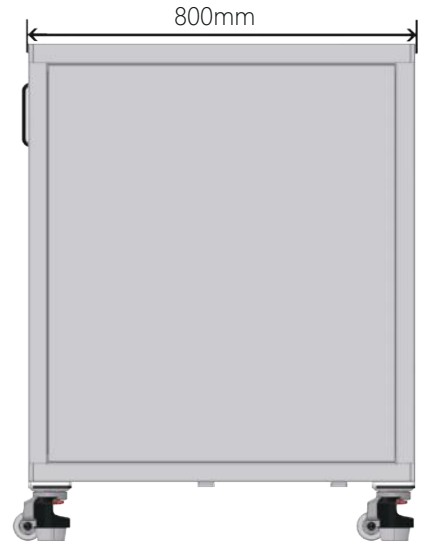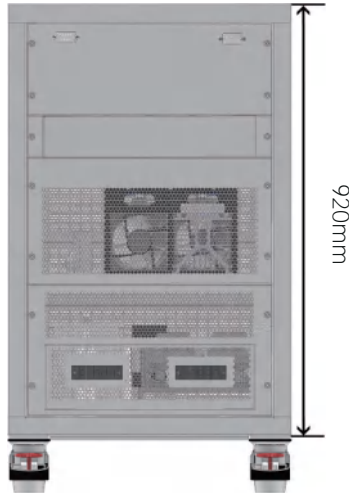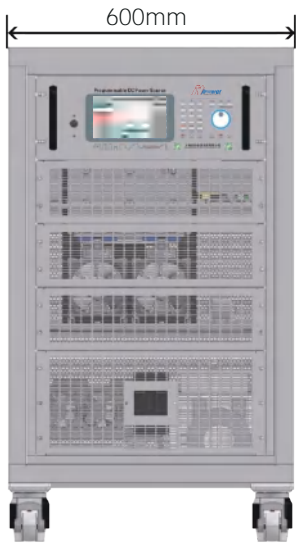


24U 600(W)*800(D)*1190(H)mm
30U 600(W)*800(D)*1453(H)mm
36U 600(W)*800(D)*1718(H)mm

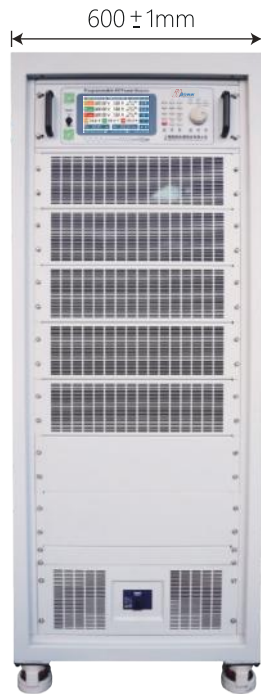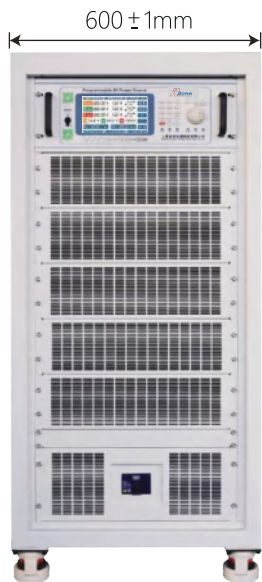


Display And Control Panel Display & Control Panel

Control Panel

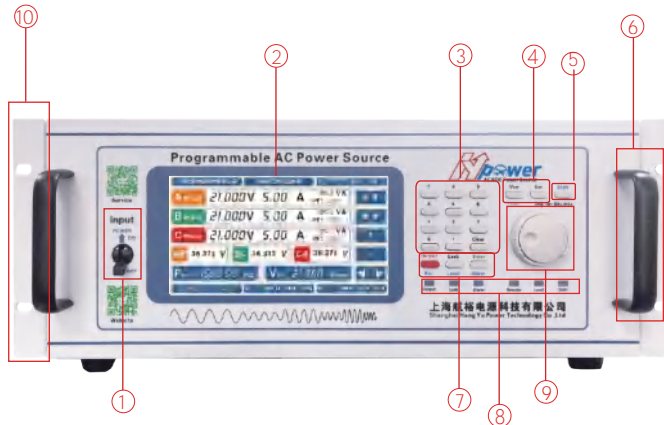


- ① Power input circuit breaker
- ② LCD Display (7-inch, touch screen)
- ③ Number input keyboard
- ④ Frequency/voltage or current setting key
- ⑤ Shift Function reuse key
- ⑥ Chassis handle
- ⑦ Lock, enter to confirm, esc to exit local, reset restart output ON/OFF switch
- ⑧ Status
- ⑨ Multistage shuttle adjustment knob (inner circle fine adjustment/outer circle coarse adjustment)
- ⑩ 19 Inch standard rack mounting holes

Rear Panel

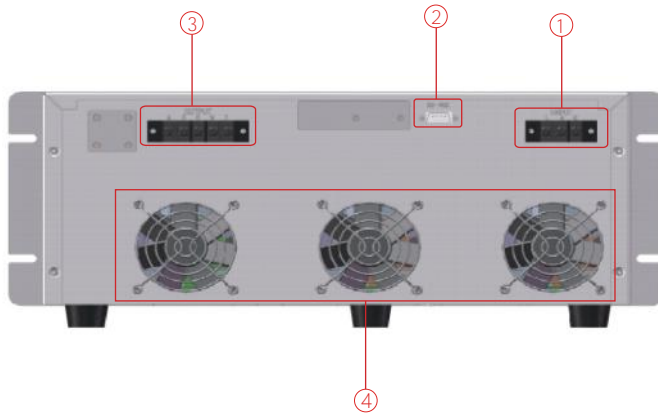

- ① AC Input terminal
- ② RS-485 & RS-232 Communication interface
- ③ AC Output terminal
- ④ Heat dissipation air outlet


Display Interface

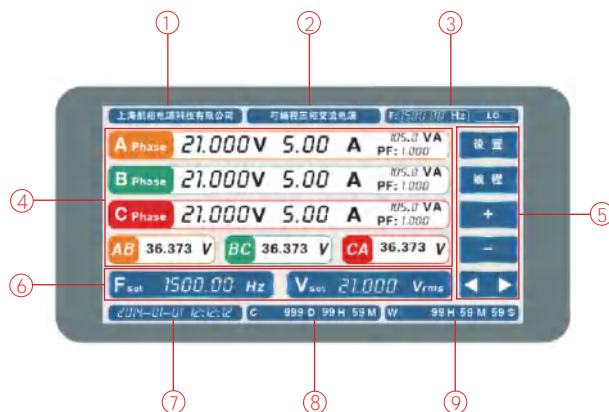

- ① Manufacturer's name
- ② Product name
- ③ Product frequency
- ④ Display area for three-phase voltage and current
- ⑤ Function setting area
- ⑥ Frequency/voltage setting value
- ⑦ TIME
- ⑧ Accumulated running time
- ⑨ This run time


Display And Control Panel Display & Control Panel

Front & Rear Panels

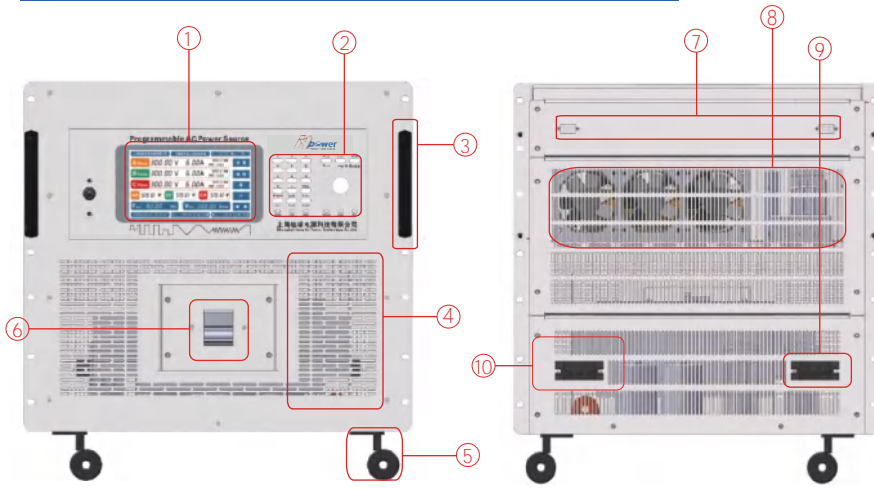


- ① LCD Display (7-inch, touch screen)
- ② Control area
- ③ 19 Inch standard rack handle
- ④ Heat dissipation air inlet
- ⑤ Casters
- ⑥ Power input circuit breaker
- ⑦ Communication interface
- ⑧ Heat dissipation air outlet
- ⑨ AC Input terminal
- ⑩ AC Output terminal

Control Panel

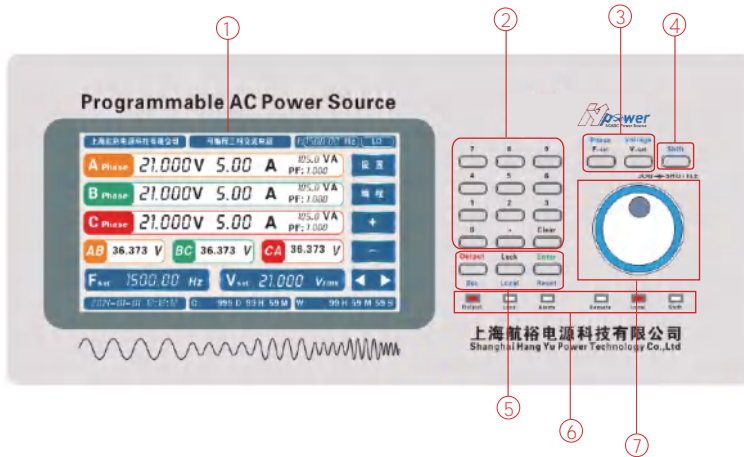

- ① LCD Display (7-inch, touch screen)
- ② Number input keyboard
- ③ Frequency/voltage or current setting key
- ④ Shift Function reuse key
- ⑤ Lock, Enter to confirm, Esc to exit Local, Reset restart Output ON/OFF switch
- ⑥ Status
- ⑦ Multistage shuttle adjustment knob (inner circle fine adjustment/outer circle coarse adjustment)

Display Interface

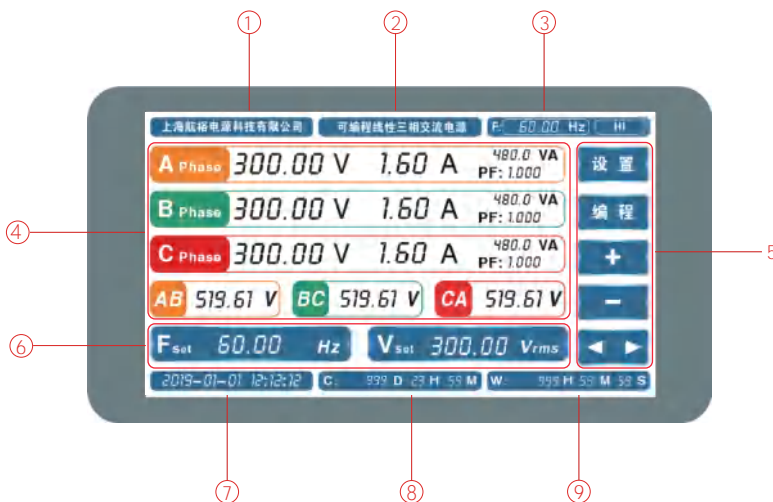

- ① Manufacturer's name
- ② Product name
- ③ Product read back frequency
- ④ Display area for reading back three-phase voltage/current/strategy factor
- ⑤ Function setting area
- ⑥ Frequency/voltage setting value
- ⑦ TIME
- ⑧ Accumulated running time
- ⑨ This run time

Cooperative Clients (Partial)

Aerospace And National Defense Military Industry Research Institute



china
aerospace



CASIC



aviation
industry



China
Aerospace



CETC



CSSC



CSIC

| | | |
|---|---|--|
| CASC 800 institute (Shanghai Aerospace Precision Machinery Research Institute) | AVIC 603 institute (AVIC Xi'an Aircraft Design and Research Institute) | CETC 14 institute (Nanjing Institute of Electronic Technology) |
| CASC 801 institute (Shanghai Institute of Space Propulsion) | AVIC 613 institute (China Aviation Industry Group Luoyang Electro Optic Equipment Research Institute) | CETC 21 institute (Shanghai Micromotor Research Institute) |
| CASC 803 institute (Shanghai Institute of Space Propulsion) | AVIC 615 institute (China Aviation Industry Group Luoyang Electro Optic Equipment Research Institute) | CETC 23 institute (Shanghai Transmission Line Research Institute) |
| CASC 804 institute (Shanghai Aerospace Electronic Communication Equipment Research Institute) | AVIC 618 institute (Xi'an Automatic Flight Research Institute of China Radio Aviation Research Institute) | CETC 36 institute (Jiangnan Electronic Communication Research Institute) |
| CASC 805 institute (Shanghai Aerospace Systems Engineering Research Institute) | AVIC 631 institute (AVIC Aerospace Computing Technology Research Institute) | CETC 38 institute (East China Electronic Engineering Research Institute) |
| CASC 808 institute (Shanghai Institute of Precision Metrology and Testing) | AVIC 105 factory (Tianjin Aviation Electromechanical Co., Ltd) | CETC 50 institute (Shanghai Microwave Technology Research Institute) |
| CASC 811 institute (Shanghai Space Power Research Institute) | AVIC 115 factory (Shaanxi Aviation Electric Co., Ltd) | CETC 51 institute (Shanghai Microwave Equipment Research Institute) |
| CASC 812 institute (Shanghai Satellite Equipment Research Institute) | AVIC 118 factory (Shanghai Aviation Electrical Appliances Co., Ltd) | CETC 54 institute (Shijiazhuang Communication Measurement and Control Technology Research Institute) |
| CASC 502 institute (Beijing Institute of Control Engineering) | AVIC 181 factory (Wuhan Aviation Instrument Co., Ltd) | CETC 55 institute (Nanjing Institute of Electronic Devices) |
| CASC 510 institute (Lanzhou Institute of Space Technology Physics) | AVIC 607 institute (China Leihua Electronic Technology Research Institute) | CSIC 707 institute (Tianjin Institute of Navigation Instruments) |
| CASIC 206 institute (Beijing Institute of Mechanical Equipment) | AVIC 304 institute (Beijing Great Wall Metrology and Testing Technology Research Institute) | CSIC 7107 institute (Shaanxi Aerospace Navigation Equipment Co., Ltd) |
| CASIC 307 factory (Aerosun Corporation) | AECC 606 institute (Shenyang Engine Research Institute) | CSIC 719 institute (Wuhan Second Ship Design and Research Institute) |
| CASIC 33 institute (Institute 33 of Aerospace Science and Industry Third Institute) | | CSIC 704 institute (Shanghai Shipbuilding Equipment Research Institute) |
| CASIC 3651 factory (Guizhou Aerospace Linquan Motor Co., Ltd) | | CSIC 726 institute (Shanghai Institute of Ship Electronic Equipment) |
| | | Jiangnan Shipbuilding (Group) Co., Ltd |
| | | Nanjing Panda Electronics Co., Ltd |
| | | State owned 741 Factory (Nanjing East China Electronics Group Co., Ltd.) |

Scientific Research & Third Party Quality Inspection Institutions





Institute of Physical and Chemical Technology (Beijing)

Urban Environment Research Institute (Xiamen)



Institute of Electrical Engineering (Beijing)

Institute of Applied Physics (Shanghai)



Cooperative Clients (Partial)

The Chinese People's Liberation Army

South China Sea Fleet
 East China Sea Fleet
 North Sea Fleet
 Navy Factory 701/702
 4724 Factory (Shanghai Haiying Machinery Factory)
 95861 Unit (Air First Base)
 The 5720th Factory of the People's Liberation Army of China

Commercial Aviation



Commercial Aircraft Corporation of China Limited



Collins Aerospace

Rockwell Collins



Guangzhou Aircraft Maintenance Engineering Co., Ltd



Beijing Aircraft Maintenance Engineering Co., Ltd

Military Academies And Local Universities



National University of Defense Technology



Aerospace Engineering University



Army Engineering University



Air Force Engineering University



Naval University of Engineering



Dalian Naval Academy



Naval Aviation University



Beihang University



Beijing Institute of Technology



Harbin Institute of Technology



Harbin Engineering University



Nanjing University of Aeronautics and Astronautics



Nanjing University of Science and Technology



Northwestern Polytechnical University



University of Science and Technology of China



Tsinghua University



Peking University



Shanghai Jiaotong University



Zhejiang University



Tianjin University



Huazhong University of Science and Technology



University of Electronic Science and Technology



Shanghai University



Beijing University of Technology



Shanghai Maritime University



Dalian University of Technology



Dalian Maritime University



South China University of Technology



Huazhong University of Science and Technology



Xi'an Electronic Technology



Xi'an Jiaotong University



Sichuan University



Donghua University



North China Institute of Aerospace Engineering



Fudan University



Xiamen University



North China Electric Power University



Changchun Institute of Technology



Xiangtan University



Zhejiang University of Technology



Xi'an University of Technology



University of Electronic Science and Technology of China

Cooperative Clients (Partial)

Power Semiconductor Customers

| | | | | | | |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| Changchun Guoke | Electrical industry | China Resources Microelectronics | Shanghai Huinengtai Semiconductor | Yuexin Technology | Wishing to create technology | Group core microelectronics |
|  |  |  |  |  |  |  |
| Hangzhou Zhongsi | Feishide | Suzhou Lianxun Instrument | Weiyujia Semiconductor | Shanghai Zhanxin Semiconductor | Chengxin Technology | Zhuoxinda Technology |

Enterprises In The Field Of Automotive Electronics

| | | | | | | |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| China Automotive Research and Development | Heavy Industry Automotive Research and Development | BMW Brilliance | Red Banner | SAIC Group | SAIC Volkswagen | GEELY |
|  |  |  |  |  |  |  |
| tesla | Weilai | Xiaomi Automobile | BYD | value | polarity | Lantu Automobile |
|  |  |  |  |  |  |  |
| Inovance | HAOMO.AI | MKLtech | Shanghai Tongmin Vehicle | Ningde Era | Human Horizons | Hezhong New Energy |

High Tech R&D Enterprises

| | | | | | | |
|---|---|---|---|--|---|---|
|  |  |  |  |  |  |  |
| Huawei | FARATRONIC | Panasonic | EPCOS | TYCO | Weidmuller | Honeywell |
|  |  |  |  |  |  |  |
| Nader | SIEMENS | ABB | Schneider | NOSRK | HONGFA | EOPL |
|  |  |  |  |  |  |  |
| FLUKE | Philips | Gree | Guilin Rubber Machinery Factory | CASCO | CRRC | US PI |
|  |  |  |  |  |  |  |
| HILTI | BOSCH | linde | NARI-TECHNOLOGY | Shanghai Electric | New Thunder Energy | Silan |

Official WeChat:
HY Power-cn



About Us

Hangyu Power was founded in 2011 and is a national high-tech enterprise, Located in Songjiang, the birthplace of the G60 Science and Technology Innovation Corridor in the Yangtze River Delta, for over a decade Strive to provide customers with accurate, intelligent, and convenient testing power solutions Plan.

Our company adheres to the product positioning of "specialty, precision, specialty, and novelty", and On the basis of targeting the market demand for "import substitution", propose "poor The development strategy of "differentiated import substitution" and "high-quality manufacturing" is committed to Innovative development of testing power supply technology in China, promoting the rejuvenation of science and technology in China The national cause is thriving.

Hangyu Power Series products cover power semiconductors, automotive electronics Aerospace, Defense and Military Industry, Low Voltage Electrical Appliances, Medical, Sensors Capacitors, inductors, smart grids, airborne, shipborne, weapons, ships.

Radar, communication, rail transit, power electronics, and other testing and other disciplines In the field of research, we strive to achieve perfect import substitution, with excellent military quality and service.

Win unanimous praise from users.

Contact Us

Tel: +86 1380 1800 699

Email: sales@hangyupower.com
neo@hangyupower.com

Address: Building 9, No. 615 Lianhe Road, Songjiang District, Shanghai, China

website: www.hangyupower.com

| | | |
|------|---|---|
| 2009 | ● | Establishing Shanghai Ouzu Electronics Brand |
| 2010 | ● | Successfully delivered 400kVA high-power AC power supply |
| 2011 | ● | Hangyu Power Supply was established and officially put into operation as a three-phase precision AC power supply and military Using a gyroscope to test the power supply, replacing Russian made products |
| 2012 | ● | Formal production of programmable variable frequency power supply and AC constant current source |
| 2013 | ● | Formal production of programmable AC/DC power supply and HY-AE excitation power supply |
| 2014 | ● | Formal production of high-power bipolar testing power supply |
| 2015 | ● | Formal production of HY-PM series and HY-GT series new models Dual phase/three-phase gyroscope power supply |
| 2016 | ● | HY-HP series programmable high-power DC power supply officially put into operation |
| 2017 | ● | HY-HV series programmable high-voltage DC power supply officially put into operation |
| 2018 | ● | HY-CTL/CTS capacitor testing high-frequency high current testing power supply And successfully delivered 100kHz, 100Arms |
| 2019 | ● | Official production of high-speed power supply for automotive electronic testing within 500kHz |
| 2020 | ● | Officially put into operation LV123 new energy vehicle testing high-voltage ripple testing power supply |
| 2021 | ● | HY-UHS series ultra-high stability magnet power supply officially put into operation |
| 2022 | ● | HY-HVL series linear high-voltage programmable DC power supply officially put into operation |

