FLA-100-6000-23-15

0.1~6GHz, 23dB, 1.5dB



Features:
* Broadband
* Low Noise

Applications:
* Wireless
* Receiver
* Laboratory Test
* Radar

Description

This product series features ultra-wideband low-noise amplifiers (LNAs) operating from 0.1GHz to 6GHz. The lineup includes:

• LNA modules powered by 5-15V DC, where increasing supply voltage enhances gain and output power;

• LNA systems with integrated switching-mode power supplies (SMPS) accepting 85-265V AC input, recommended for most applications;

• LNA systems employing linear-regulated power supplies for 220V AC operation, delivering optimal performance where extreme power purity is critical.

Electrical

Frequency:	0.1~6GHz
Gain:	23dB typ.
Gain Flatness:	±1.5dB typ.
Output Power (P1dB):	20dBm typ.
Output Power (Psat):	21dBm typ.
Noise Figure:	1.5dB typ.
Spurious:	-60dBc typ.
VSWR:	1.6 typ.
Reverse Isolation:	-25dB typ.
Voltage:	+5V DC (Outline A) +6~15V DC (Outline B) +85~+265V AC (Outline C) +220V AC (Outline D)
Current:	100mA typ. (Outline A, B)
Impedance:	50Ω

Absolute Maximum Ratings*1

RF Input Power:	+18dBm
Voltage:	+6V (Outline A) +20V (Outline B)

[1] Permanent damage may occur if any of these limits are exceeded.


Mechanical

RF Connectors:	SMA Female


Environmental

Operating Temperature:	-45~+85℃
Non-operating Temperature:	-55~+125℃


Outline Drawings

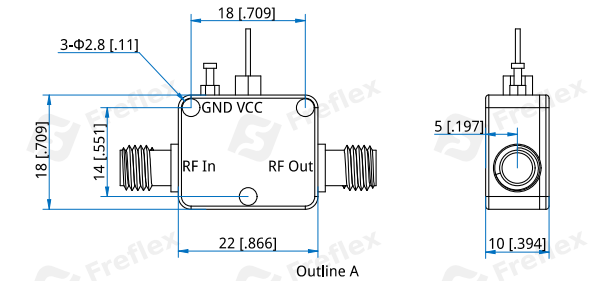

Outline A

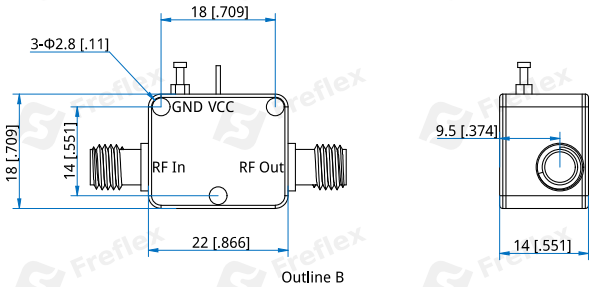

Outline B

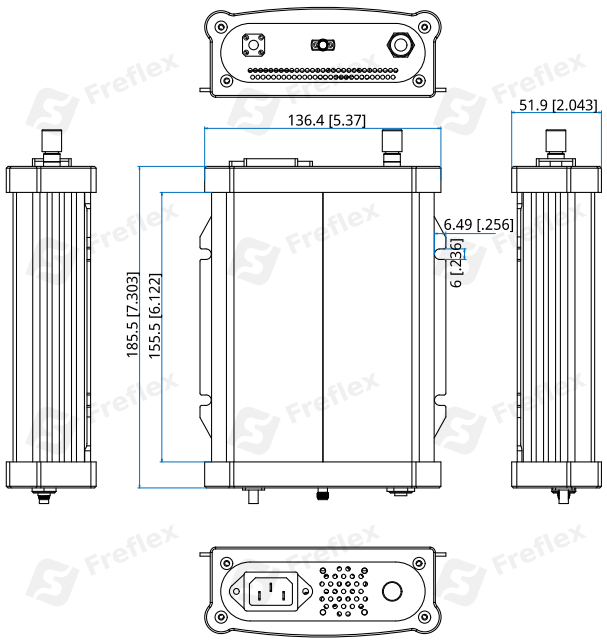

Outline C: Enclosure 0-000009-V2

How To Order


FLA-100-6000-23-15 - Outline A

FLA-100-6000-23-15-1 - Outline B

FLAS-100-6000-23-15 - Outline C, AC-powered unit integrates a switching-mode power supply.

FLAS-100-6000-23-15-1 - Outline D, AC-powered unit integrates a linear-regulated power supply.

Customization is available upon request.

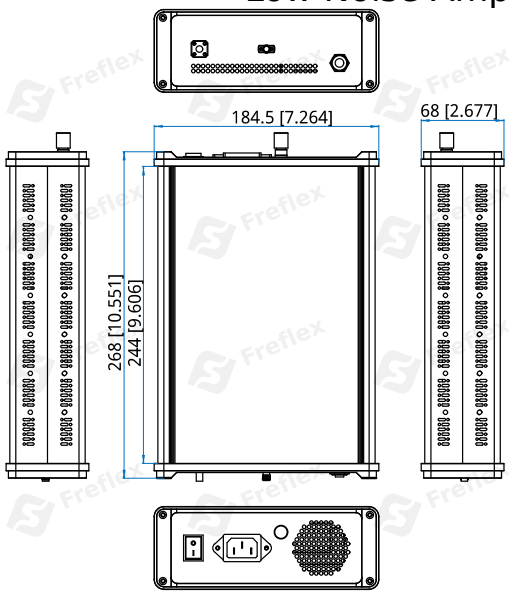


Outline E: Enclosure 0-000006


Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

Typical Performance Curves


Input VSWR vs. Frequency

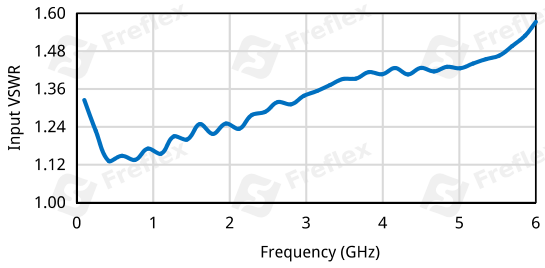


Output VSWR vs. Frequency

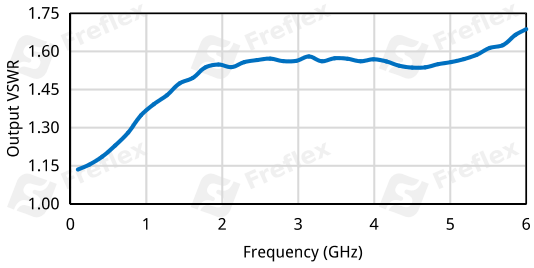


Gain vs. Frequency

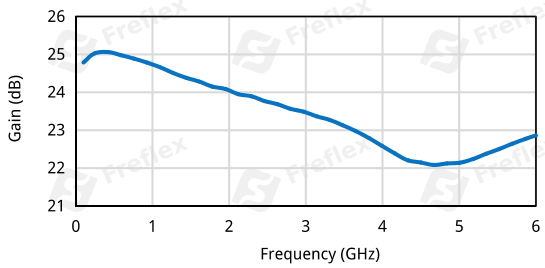

Isolation vs. Frequency

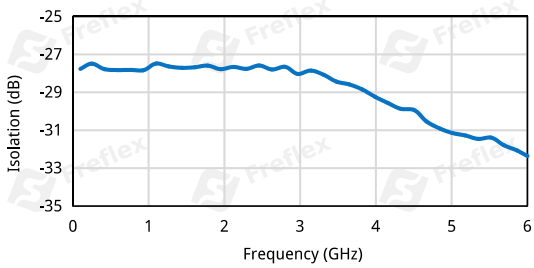

Power vs. Frequency

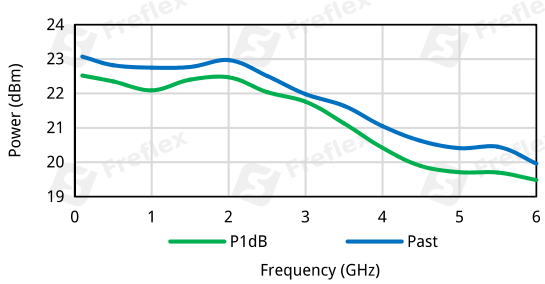

Noise Figure vs. Frequency

