

Coaxial Fixed Attenuator

RFH67XX185D10



DC-67 GHz, 3-40 dB, 10 Watts, 1.85mm, Unidirectional

Rev 3

Electrical

| Impedance | 50 ohm | | | | |
|-----------------|--|-----------|-----------|-----------|--|
| Frequency Range | DC-67 GHz | | | | |
| VSWR | 1.45 max | | | | |
| Input Avg Power | 10W@ 25℃ ambient, derating linearly to 1W at 100℃ | | | | |
| Peak Power | 50W (5 micro-sec pulse width, 6% duty cycle) | | | | |
| Direction | Unidirectional, 1.85mm male input, 1.85mm female output (other configurations available) | | | | |
| Attenuation(dB) | 3-10 | 20 | 30 | 40 | |
| Accuracy(dB) | -1.5/+1.8 | -1.2/+1.5 | -1.2/+1.5 | -1.2/+1.5 | |


Mechanical

| Connector Body | Passivated stainless steel | |
|----------------|----------------------------|--|
| Heat Sink | Black anodized aluminum | |
| Center Contact | 1.27um Gold plated BeCu | |
| Net Weight | About 53 g | |

Environmental

| Operating Temperature | -55℃ to 100℃ |
|-------------------------|-----------------|
| Storage Temperature | -55℃ to 125℃ |
| RoHS | Compliant |
| Temperature Coefficient | <0.0004 dB/dB/℃ |

Dimensions(mm)

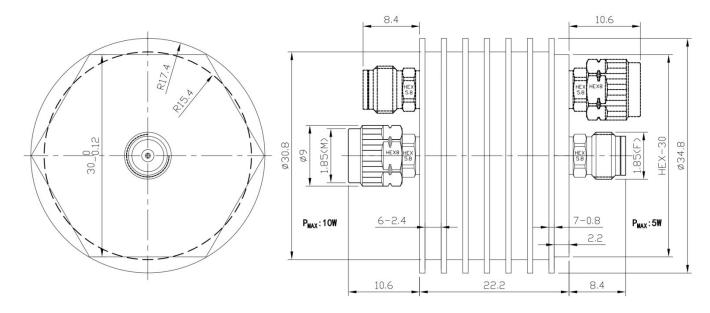

Notes

- 1. Always pay attention to the direction of attenuators.
- 2.To maintain best performance, recommended to use fan to keep the case temperature under 85° C.
- 3.Customized dB values, outlines and optimal accuracy/VSWR available.


Model Description

RFH67XX185D10


- 1.XX for dB value: 06=6dB,30=30dB
- 2.Code for connector configuration:
- A=female for two ends; B=male for two ends
- C=female for input and male for output;
- D=male for input and female for output.

Typical Test Data(Contact us at sales@rfone.cn for test plots of more models)

10dB

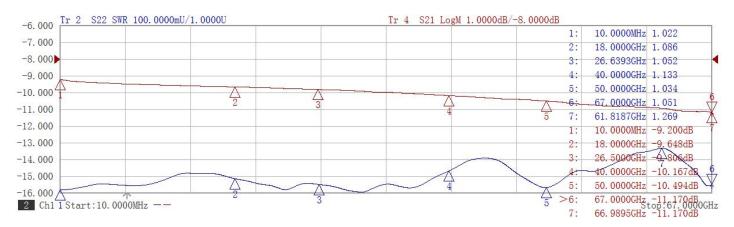

20dB

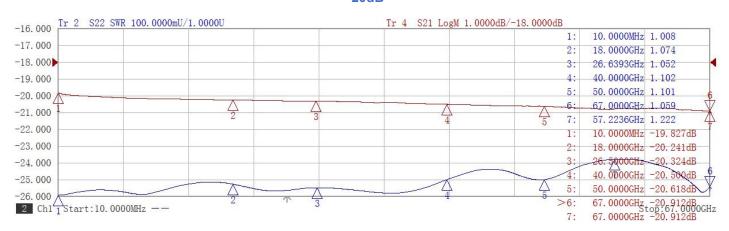

30dB

