


## VNA Test Cable Assembly, using PL230P

DC-67 GHz, NMD 1.85mm Female to NMD 1.85mm Female


V67-68F68F-L(L:Length)

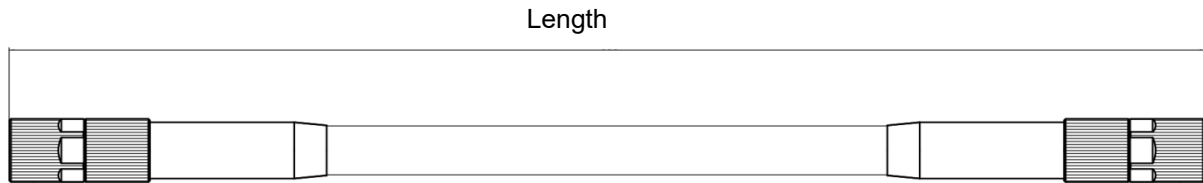

### Features and Applications

- Extremely phase & amplitude stable with flex
- Long lasting life >50000 flexures
- Ideal for use in vector network analyzers or other critical measurements
- Long calibration intervals
- High flexibility and no spring-back

### Cable Structure



No.	Construction	Materials
1	Center Conductor	Solid silver-plated copper
2	Dielectric	PTFE
3	Outer Conductor	Silver-plated copper tape wrap
4	Interlayer	PTFE
5	Outer Shield	Silver-plated copper wire braid
6	Inner Jacket	FEP
7	Armored Spring	Stainless steel spiral
8	Strengthening Layer	Silver plated copper braid
9	Anti Twist Layer	Waterproof Band
10	Armor Jacket	Black Nylon Sleeve



### Configuration

Connector 1	NMD 1.85mm Female	Connector 2	NMD 1.85mm Female
Body	Passivated stainless steel	Body	Passivated stainless steel
Center Contact	Gold plated BeCu	Center Contact	Gold plated BeCu

### Electrical

Frequency	DC-67 GHz
Impedance	50 Ω
VSWR	1.4 max
IL(63CM cable assembly)	4.7dB max
Phase Stability*	±7°@ 67 GHz
Amplitude Stability*	<±0.15dB

\* Wrapped 360° around a 55mm radius mandrel.

### Mechanical & Environmental

Outer Diameter	14.5mm
Min.Bending Radius	55mm
Flex Durability	>50000 Cycles
Mating Life	>5000 Cycles
Temperature(Operation)	0~40 °C
Temperature(Storage)	-40~85 °C
Crush Resistance	>150kgf/cm